

CHAIN LINK FENCE / FITTINGS / SPECIALIZED FENCE

04/24/23

SALES TERMS AND CONDITIONS



FREIGHT/DELIVERY

All deliveries within our delivery territory will be made FREE of charge unless the nature of the delivery is unusual due to special handling and for timing requirements.

Unless prior arrangements have been made, we require the customer's presence and assistance with receiving our delivery.

RETURN POLICY

Any customer returning material must first contact Eastern for a return authorization within five days. **No returns on wood or vinyl products**. Any returns shipped without authorization will not be accepted. Eastern requires the returned goods to be properly packaged and in the same condition as was originally received. Eastern reserves the right to inspection on returned products prior to approving the final credit memo.

A minimum restocking charge of 20% (minimum \$35.00) will be charged on all material returned unless the return results from our error.

SPECIAL ORDERS

Eastern prefers to receive a written purchase order when a special or non-stock item is being purchased. However, as a convenience to our customers, we will accept verbal orders. We may require a non-refundable 50% deposit or advance payment depending upon the nature of the order. Once ordered, there can be no cancellation or return on special orders.

QUOTATIONS, SPECIFICATIONS & CERTIFICATIONS

Quotations will be given based upon the customer's breakdown of the material requirements. Eastern will gladly assist in helping you with the quoting of material, however, we are not responsible for products ordered incorrectly.

When material being purchased is required to meet certain specifications and/or certifications will be required, we must be notified at the time the order is being placed.

CATALOG CHANGES

As you will notice, this catalog is very comprehensive and even though we go to extreme efforts to keep it updated it would be impossible to update it for every change that may occur. Therefore, product information and prices shown are subject to change without notice. We are also not responsible for typographical errors.

TRADEMARK REPRODUCTION RIGHTS

Eastern Wholesale Fence LLC ©2023 All Rights Reserved. Eastern, the Eastern Logo, Illusions, Illusions Vinyl Railing System, Grand Illusions Color Spectrum, Grand Illusions Vinyl WoodBond, Pen Pals, Ornamental Aluminum, System 21, Uni-Weld, Eastern White Cedar, EverStrong, Internal Slide Gate, Investment Grade and Marine Link logos are all trademarks of Eastern Wholesale Fence LLC, registered in the U.S. and other countries. No part of this publication may be reproduced, stored in a retrieval system or transmitted in any form or by any means, electronic, mechanical, photocopying, recording, scanning or otherwise, except as permitted under Sections 107 or 108 of the 1976 United States Copyright Act, without the prior written permission of Eastern Wholesale Fence LLC



Eastern Wholesale Fence LLC • 1-800-339-3362 266 Middle Island Rd. Medford, NY 11763 • www.easternfence.com

TABLE OF CONTENTS

INFORMATION	
Sales Terms and Conditions	
Table of Contents	
Why Eastern Chain Link & Specialized Fence?	
Ordering Checklist Chain-Link Information Pages	
Chain-Link Fence Installation Instructions.	
Chain-Link Pence installation instructions	Б-10
SYSTEM 21 COLOR VINYL CHAIN LINK PRODUCTS	
System 21 Vinyl Coated Chain Link Fabric	R_1/I
System 21 Color Pipe	B-15
System 21 Color Chain-Link Fittings	
System 21 Gate Frames and Gates	
EASTERN CHAIN-LINK FENCE GALVANIZED PRODUCTS	
Galvanized Chain-Link Fabric	B 25
Galvanized Chain-Link rabitc	
Galvanized Tipe::::Galvanized Chain-Link Fittings:::Galvanized Cha	
Post Caps, Plugs	
Tops, and Sleeves	
Tension Bands and Brace Bands	
Clamps	
Rail Ends and Bolts	
Fence Ties and Fabric Anchors	
Post Hinges and Frame Hinges	B-38
Oarlocks and Drop Fork Brackets	
Latches and Closers	
Closers, Residential Locking Device, Drop Rods, Scrolls	B-41
Gate Clips, Gate Corners, Center Stops, Hold Back	
Industrial Hinges, Swing Gate Wheels, Industrial Locking Devices	
Tension Bars, Truss Rods, Hog Rings	
Barb Wire, Barb Arms	
Barb Arm Blade, Barb Arm Bases, Barb Arms, CEMENT	
Fulcrum Latches, Hi Security Latch, Cantilever Latch,	B-47
Cantilever Rollers, Cantilever Roller Guards	
Miscellaneous	D 40
Coil Spring Wire, Galvanized Chain,	B-48
Baseball Backstop Adaptor, Floor Flanges	D 40
Overhead Slide Gate Systems	B-49
Speed Rail Fittings (Aluminum)	
Speed Rail Fittings (Galvanized)	
Rolling Gate Kits	
Rolling Gate Hardware	
Galvanized Gate Frames	
Barrier Gates	
Pen Pals Kennel Enclosures.	
Internal Slide Gates	B-62
Cantilever Slide Gates	B-66
Rolling Gate Frames	B-68
Specialty Fabrication	B-69
Decorative Slats and Hedge	
Guard Rail	B-71
SPECIALIZED FENCE PRODUCTS	B-76
Snow Fence, Orange Safety Fence, Farm and Field Fence, Studded T-PostVinyl Coated Welded Mesh, Pool Fence, Heavy Duty U-Posts, Staples	
Deer Fence	
Steel Hex Web Deer Fence	
Temp Fence	
Privacy Screens	
-	











Why Eastern Chain Link & Specialized Fence? FENCE





Eastern Chain Link Fence

Eastern Fence has the largest pipe & chain link fence inventory in the Northeast! We carry a complete line of chain link pipe products including every residential or commercial application you could imagine. We supply it all.

INCLUDING: GALV, SCHEDULE 40, 8-5/8" PIPE (Industry Leader), ALL SS PRODUCTS, FABRIC, PIPE & TUBE, FITTINGS, GATES & KENNELS, SPECIALTY FENCE

IN STOCK AND AVAILABLE FOR NEXT DAY DELIVERY



System21™

System 21 vinyl coated color chain link fence system is available in your choice of green, black, and brown. Our exclusive coating process bonds a tough resilient protective layer of polyester powder coating over extra heavy gauge pipe, gates, fittings and wire, giving the entire system an attractive finish with an extended durability that will last for many years.



Eastern Temporary Fence & Privacy Screens

Eastern Temporary Fence Panels are perfect for construction sites, domestic housing sites, sporting events, special events, concerts, crowd control, and a wide range of industrial and engineering applications. Eastern Temporary Fence is modular fence designed to meet or exceed industry standards. Eastern Temporary Fence panels (ETF) are easy to install and tear down. They are freestanding, easy and safe to assemble, and reusable.



Pen Pals™

PenPals[™] portable pet runs are made of high quality welded construction and have a galvanized steel framework. They have a smooth finish galvanized fabric, are portable and free standing, have an easy 1, 2, 3 installation and a limited warranty.




Eastern Hedge and Privacy Slats

Eastern Fence Chain Link Fence Slats are extruded from High Density Polythylene (HDPE), color pigments and ultra violet (UV) inhibitors, specifically designed to inhibit the harmful effects of sunlight and lengthen the life of the product. The only exceptions are Winged Slats which also include Ethyl Vinyl Acetate (EVA), which is a softer plastic to keep wings flexible and resilient. Eastern Fence Products are resistant to: severe weather conditions, salt water, sand, road dirt, most acids, alcohol, alkaline, ammonia, petroleum distillates, and common environmental pollutants.

Why Eastern Chain Link & Specialized Fence? FENC






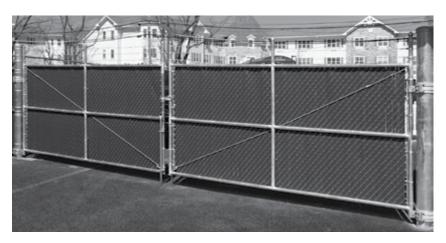


Eastern Fence is the perfect one-stop-shop for all of your chain link, pipe, wire, temp-fence, wind screen, slats, guard-rail, deer fence, slide-gates, pet kennels, fittings, and more...






















ORDERING CHECKLIST



Please Have Your Material List Ready To Go When You Call

Being that Eastern Chain Link Fence products are sold wholesale to the trade, it is highly suggested that you have a material list for your order prior to calling. Please feel free to use this checklist and the "CHAIN LINK ORDERING SHEET" as a guide prior to your call.

☐ Wire

Also known industry wide as the fabric of the chain link fence. This is the finishing touch to complete your chain link fence.

□ Gates

Don't forget your gates! Walk gates, drive gates, rolling gates, cantilever gates, overhead gates, barrier gates, and internal slide gates. Residential or Industrial. (NOTE: Remember for each Eastern Chain Link Fence gate opening, you should order wider diameter and heavier gauged posts.)

☐ Posts & Rails

When ordering your posts, you should check the post spacing chart in the Eastern Chain Link Fence Installation Instructions. This will help you in knowing the length and spacing required for your fence installation. Gate posts are usually bigger than terminal posts. Line posts are your unity during a run of chain link fence. Top, middle, or bottom rails are also an important part of your fence installation, but not always necessary. It depends on the job requirements and/or specifications.

□ Post Caps

Terminal post caps, line tops, and gate caps are all a necessity when installing your Eastern Chain Link Fence.

☐ Hardware & Fittings

- Hinges Pressed steel or malleable, residential or commercial
- Latches (oarlocks, self-latching auto latches, Magna-Latches, and industrial locking devices)
- Drop rods and guides (Residential and Commercial)
- Spring closers (Sold separately for posts up to 2-1/2". Modifications can be made to retro fit other size posts.)
- Tension bands, brace bands, rail ends, tension bars, fence ties, boulevard and end-clamps, coil wire, nuts and bolts and more...

Order Process

Orders may be submitted by calling (631)-698-0900 or (800)-339-3362, faxing to (631)-698-6408 or (800)-788-0411, or e-mailing to **sales@easternfence.com**.

CHAIN LINK ORDERING SHEET




NOTE: MAKE COPIES FOR ORDERING CONVENIENCE


COMPANY							
NAME							DATE
ADDRESS							CUSTOMER CODE
CITY		STATE			ZIP		PURCHASE ORDER #
DAY PHONE		FAX					JOB NAME
E-MAIL		WEB-SITI	r				
E-IWAIL		WED-SIII					QUOTE 🗖 ORDER 🗖
Eastern Cha	ain Link Fence Order List DESCRIPTION		COLOR	QUANTITY	\$ EACH	\$ TOTAL	Fence Items List:
							— Wire
							Top rail/ Bottom Rail
							Line Posts
							Terminal Posts
							Gate posts
							— Gates
							- Walk
							- Drive
							Rolling - Cantilevered
							- Gantilevered - Barrier
							- Internal Slide
							-Overhead Slide
							— Hardware
							- Hinges
					1		- Latches
							Drop Rods / Guides
							- Spring Closers
							Fittings
							- Post Caps
							- Line tops
					-		Tension Bars
							- Tension Bands
							(Standard or beveled)
							Brace Bands
							(Standard or beveled)
							- Rail end cups
					1		Fence Ties - Coil Wire
							Hog rings - Nuts and bolts
							- Nuts and boits - Etc.
							- LIU.
GRAND T	UIAL						

RESI CHAIN LINK FENCE PARTS



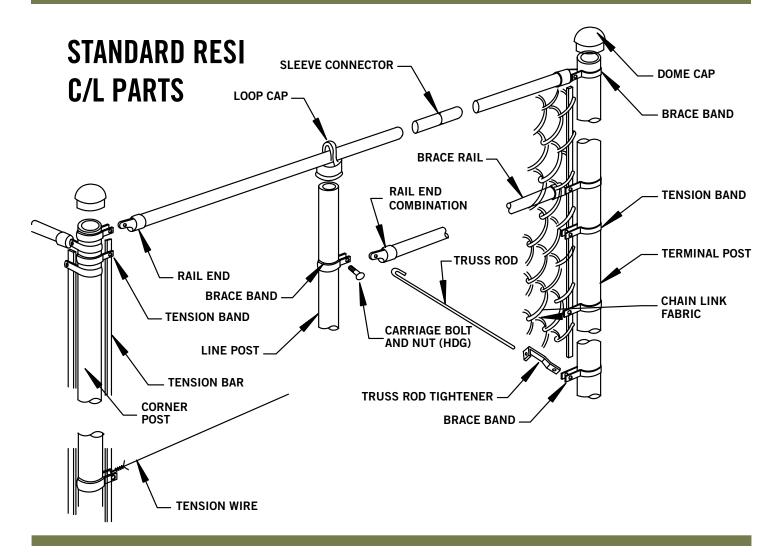

TYPICAL RESIDENTIAL CHAIN LINK FENCE INSTALLATION

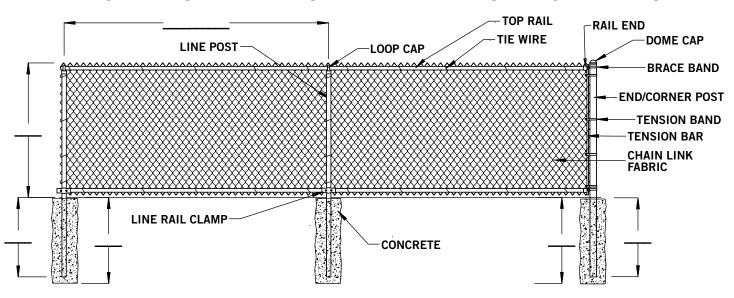

Eastern Chain Link 04/24/23


1.800.339.3362 • www.easternfence.com


Page B-8

COMMERCIAL C/L PARTS



TYPICAL COMMERCIAL CHAIN LINK FENCE INSTALLATIONS

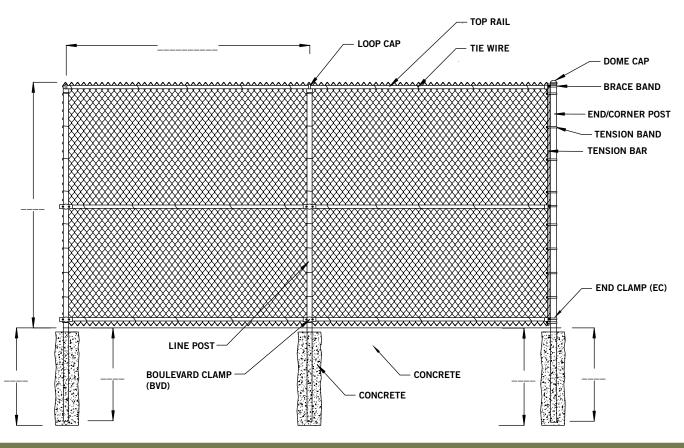

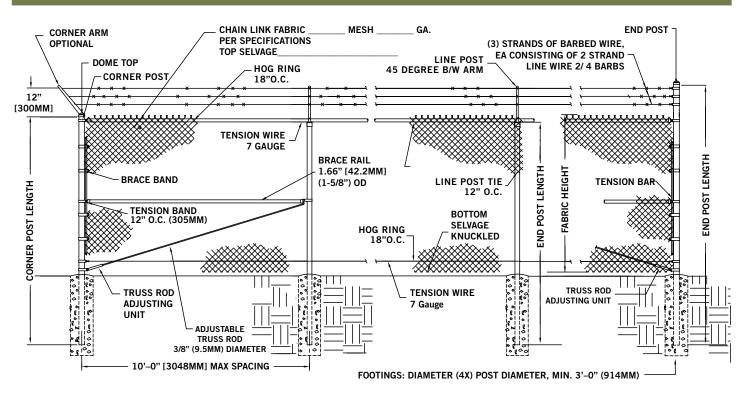




gence*



CHAIN LINK FENCE

HOMES
YARDS
SWIMMING POOLS


HINTS FOR ERECTING CHAIN LINK FENCE

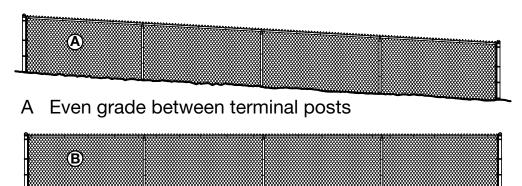

B Level grade



C Fence following grade



D Level grade with rolling terrain

HOW TO ERECT CHAIN LINK FENCE

STEP 1 - SURVEY PROPERTY LINES


Be sure that the desired location of fence lines do not exceed property lines. This is very important. We recommend that all posts be set approximately 4" inside of the property line to avoid encroaching on adjoining property with the concrete foundations. This may be done by stretching string or chalk lines on the property line and setting posts approximately 4" inside of them.

STEP 2 - LOCATE AND SET TERMINAL POSTS

First determine the location of end, corner, and gate posts (which are referred to as terminal posts).

Distance between gate posts is determined by adding the actual width of the gate to an allowance for hinges and latches. Single walk gates require 3¾" for hinges and latches and double drive gates require 5½". For example, a 3 foot walk gate should measure 32¼" wide. Adding 3¾" to the width means that the distance between posts (inside face to inside face) should be 36". (See Figure 13.)

Now, dig the holes as shown below in Figure 1. (To determine depth of hole see Figure 2 - Measurement C.)




Next, mark all posts with crayon or chalk for the correct height of fence you are installing (see Figure 2 —). Terminal posts should be set 2" higher than the width of the fabric and line posts 2" lower than the fabric width.

Set the terminal posts in concrete using a concrete mix as follows: 1 part cement, 2 parts sand, and 4 parts gravel. Mix a fairly heavy solution as too much water weakens concrete and may cause cracking. Use a carpenters level to set posts plumb. Crown all post footings for water drainage by sloping concrete away from post.

WARNING: WHEN DIGGING POST HOLES WATCH FOR AND CHECK OUT ANY UNDER-GROUND CABLE OR PIPE LINES AND CONTACT YOUR LOCAL UTILITY.

STEP 3 - LOCATE AND SET LINE POSTS

Mark the grade line on all line posts measuring from the top down as shown in Figure 2. Then measure the distance between terminal posts and check line post spacing chart (Figure 3 below) for exact distance to allow between line posts.

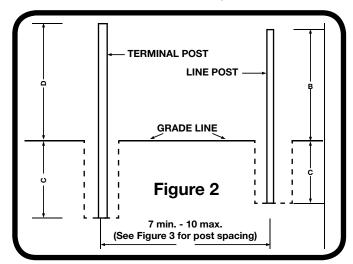


*MEASUREMENT C - Depth that post will be in the ground will be determined by lengths of posts being used, after A or B dimension is subtracted from overall length of posts.

Fence Height	А	В	С
3' 6"	44"	40"	*
4' 0"	50"	46"	*

Space Apart Apart Space Apart Apart Phase Apart Phase Apa		Line Post Spacing Chart								
31 ft. 7 ft. 9 in. 52 ft. 8 ft. 8 in. 72 ft. 9 ft. 93 ft. 9 ft. 3 in. 113 ft. 9 ft. 5 in. 32 ft. 8 ft. 3 in. 53 ft. 8 ft. 10 in. 73 ft. 9 ft. 2 in. 94 ft. 9 ft. 5 in. 114 ft. 9 ft. 6 in. 33 ft. 8 ft. 3 in. 54 ft. 9 ft. 7 ft. 9 ft. 3 in. 95 ft. 9 ft. 6 in. 115 ft. 9 ft. 6 in. 34 ft. 8 ft. 9 in. 55 ft. 8 ft. 2 in. 75 ft. 9 ft. 4 in. 76 ft. 9 ft. 4 in. 96 ft. 9 ft. 7 in. 116 ft. 9 ft. 9 in. 36 ft. 9 ft. 4 in. 76 ft. 9 ft. 4 in. 76 ft. 9 ft. 6 in. 97 ft. 9 ft. <td< th=""><th>Space</th><th></th><th></th><th></th><th>Space</th><th></th><th>Space</th><th></th><th>Space</th><th>Set Post Apart</th></td<>	Space				Space		Space		Space	Set Post Apart
47 ft 9 ft. 5 in. 67 ft 9 ft. 7 in. 87 ft 9 ft. 8 in. 108 ft 9 ft. 9 in. 128 ft 9 ft. 10 in 48 ft 9 ft. 7 in. 68 ft 9 ft. 8 in. 88 ft 9 ft. 9 in. 109 ft 9 ft. 10 in. 49 ft 9 ft. 9 in. 69 ft 9 ft. 10 in. 89 ft 9 ft. 10 in. 110 ft 10 ft.	31 ft	ft. 9 in. ft. ft. 3 in. ft. 6 in. ft. 3 in. ft. 6 in. ft. 5 in. ft. 6 in. ft. 5 in. ft. 5 in. ft. 7 in.	52 ft 8 ft 53 ft 8 ft 54 ft 9 ft 55 ft 8 ft 56 ft 9 ft 57 ft 9 ft 58 ft 9 ft 60 ft 10 ft 61 ft 8 ft 62 ft 8 ft 63 ft 9 ft 65 ft 9 ft 66 ft 9 ft 66 ft 9 ft 67 ft 9 ft 68 ft 9 ft	8 in. 10 in. 2 in. 4 in. 6 in. 8 in. 10 in. 10 in. 5 in. 7 in. 8 in.	72 ft	9 ft. 9 ft. 2 in. 9 ft. 3 in. 9 ft. 4 in. 9 ft. 6 in. 9 ft. 7 in. 9 ft. 9 in. 9 ft. 10 in. 10 ft. 9 ft. 1 in. 9 ft. 3 in. 9 ft. 4 in. 9 ft. 6 in. 9 ft. 6 in. 9 ft. 7 in.	93 ft	9 ft. 3 in. 9 ft. 5 in. 9 ft. 6 in. 9 ft. 7 in. 9 ft. 8 in. 9 ft. 9 in. 10 ft. 9 ft. 2 in. 9 ft. 2 in. 9 ft. 4 in. 9 ft. 4 in. 9 ft. 5 in. 9 ft. 6 in. 9 ft. 7 in. 9 ft. 8 in. 9 ft. 10 in.	113 ft	9 ft. 5 in. 9 ft. 6 in. 9 ft. 7 in. 9 ft. 8 in. 9 ft. 10 in. 9 ft. 10 in. 10 ft. 9 ft. 3 in. 9 ft. 4 in. 9 ft. 5 in. 9 ft. 6 in. 9 ft. 7 in. 9 ft. 8 in. 9 ft. 9 in. 9 ft. 10 in.


Next, stretch a masons line from outside of terminal posts to outside of terminal posts (be sure the concrete has set up sufficiently so as not to lose plumb). The line post holes should be lined up so that when they are set in the center of their holes, their centers will line up with the terminal post centers. This means the outside faces of the line posts will be about ¼" inside of the line stretched between the outside of the terminal posts. Now dig the line post holes and set the line posts.

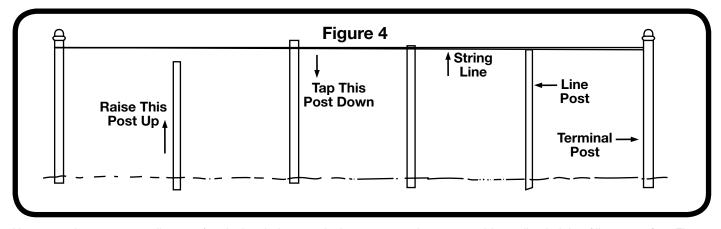

Next, stretch your masons line taut four inches below terminal post tops and use as a guide to align height of line posts (see Figure 4 above). If necessary to adjust height of any post either up or down, simply raise or lower post as illustrated before concrete sets up. Use your level to keep plumb while adjusting post height.


STEP 4 - APPLY FITTINGS TO TERMINAL POSTS

Check material list and fittings identification chart. After the posts have been installed and the concrete allowed to set, slip tension and brace bands on terminal posts. (See Figure 5.) The tension bands should be spaced approximately 10-12" apart. Do not spread or distort bands. All bolt heads for bands are on the outside of fence and the threaded ends are on the inside. Then apply all terminal post caps.




STEP 5 - APPLY TOP RAIL

Next, attach loop caps. (See Figure 6.) They are set with the top rail hole offset toward the outside of the fence making flush the outside face of the top rail through the loop caps. (See Figure 7.) Join the top rail with swedged end where required. (See Figure 8.) End of the top rail fits into rail end fittings on the terminal post. (See Figure 9.)



STEP 6 - HANG FABRIC

After assembling the framework, unroll the fabric on the ground along the fence line starting at a terminal post. Then slide tension bar thru the last link in your fabric and attach this combination to the terminal post using tension band and bolts provided. (See Figure 10.) If more or less fabric is needed to span the opening an additional amount can be connected or removed as shown in Figure 11. The fabric should be on the outside face of all posts and loosely attached to the top rail by a tie wire.






Figure 11

REMOVING FENCE FABRIC -

To remove excess fence fabric, untile both top and bottom ends of wire at the spot you wish to terminate the section. Then twist this wire in corkscrew fashion until it comes completely out.

CONNECTING FENCE FABRIC


- To join two sections of fence fabric, remove the end wire on one of the sections by untying each end of the wire and twisting out in corkscrew fashion. Then pull the two sections together and connect with the single wire that was removed. Then retie each end. Note: sometimes it is necessary


Note: sometimes it is necessary to remove a second wire on the one end in order for the two sections to mesh.

STEP 7 - STRETCH FABRIC

Fabric should be stretched from the terminal post already attached to the opposite terminal post. Insert tension bar in end of fabric and attach fence stretcher to bar (ratchet type power pull, large carpenter's clamps, block and tackle, or similar device may be used. Most wire stretching tools of this type can be rented or borrowed locally.)

As you stretch the fabric test it for tension (it is stretched enough when it gives slightly). The top of the fabric should be located approximately ½" above the top rail to insure proper height. After fence fabric is sufficiently tight, remove the excess fabric as shown in Figure 11, and connect the tension bar to the post with tension bands. Also fasten the fabric to the top rail and line posts with tie wires spaced approximately 18" apart.



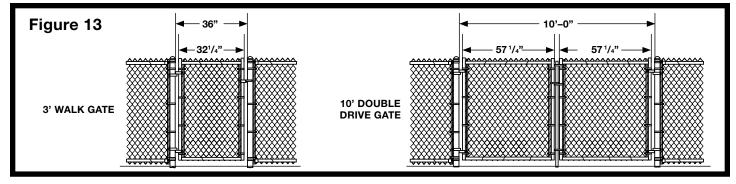

STEP 8 - HANG GATES

After the entire fence has been completed, apply male hinges to one of the gate posts, hanging the top hinge upside down thus preventing the gate from being lifted off. Loosely apply female hinges on the gate frame and slip them onto the male hinges that have been installed on the gate post. Set hinges to allow for full swing of the gate and align the top of the gate with the top of the fence. Tighten all hinges securely. Install gate latch for single gates. For double gates, use the same procedure as on walk gates but install center latching device (fork latch).

MA	TERIALS NE	EDED FOR RESIDE	NTIAL CHAIN LINE	K FENCE
PIECES	ITEM-	-DESCRIPTION	QUANTITY TO USE	
(1)		Fabric (50 feet per roll)	Divide total footage by 50 and round up	
(2)	0	Top Rail Swedged End 13/8" or 15/8" O.D.	Total footage	
(3)	0	Line Post 15/8" or 2" O.D.	Divide total footage by 10 and round up	
(4)	Ô	Loop Caps match to post and rail	Use 1 per line post	TOOLS YOU WILL FIND
(5)		Terminal Post 2" or 21/2" O.D.	_	USEFUL WHEN
(6)		Tension Bar	Use 1 per end or gate post, 2 per corner post	INSTALLING
(7)		Brace Band	Use 1 per tension bar	YOUR CHAIN LINK
(8)		Rail Ends	Use 1 per tension bar	FENCE
(9)		Tension Band	Use 4 per tension bar or 1' per foot of fence height	1. Post hole digger
(10)		⁵ / ₁₆ " x 1 ¹ / ₄ " Carriage Bolts	Use 1 per tension or brace band	2. Wheelbarrow, shovel
(11)		Terminal Post Caps	Use 1 per terminal post	and hoe to mix and transport
(12)		Alum Hook Ties	Use 1 per foot of fence— Packaged 100 per bag	3. Tape measure 4. Level
(13)		Walk Gate (3' or 31/2' wide)	_	String and stakes or mason's line Hacksaw or pipe cutter
(14)		Double Drive Gate (10' or 12' wide)	_	7. Pliers 8. Fence stretcher (block & tackle, ratchet type
(15)		Male Hinge	Use 2 per walk gate and 4 per double drive gate	power pull, etc.) 9. 1/2" x 9/16" wrench or
(16)	(January San	³ / ₈ " x 3" Carriage Bolts	Used with the male hinge, 1 per hinge	crescent wrench
(17)		Female Hinge 13/8"	Use 2 per walk gate and 4 per double drive gate	
(18)		3/8" x 13/4" Carriage Bolts	Used with female hinge, 1 per hinge	
(19)		Fork Latch	Needed on walk gates	

Disclaimer: The Chain Link Fence Manufacturers Institute (CLFMI) is a not-for-profit organization and has provided all information in this publication, "Step by Step Method for Installing Your Own Chain Link Fence", as a public service. While every effort has been made to provide accurate information, neither the CLFMI nor its members make any warranties, express or implied, as to the adequacy or accuracy or fitness for a particular purpose of the instructions, diagrams and other information in this publication. The CLFMI and Eastern Wholesale Fence LLC bear no responsibility for any errors or omissions in this publication. Users shall bear all risks from using the information in this publication

VINYL COATED COLOR CHAIN LINK FABRIC System 21





AVAILABLE COLORS: EASTERN GREEN (EG), BLACK (BK), BROWN (BR), WHITE (WT) I SPECIAL COLORS AVAILABLE

SPECIALS: Set up charges apply to special heights, colors, selvage, smaller mesh sizes, and minimum runs. Call for quotes on 6 and 3-gauge fabrics.



	SYSTEM 21 COLO	R VINYL COATE	ED RESIDENTIAL :	2" x 9-GAUGE FA	BRIC
Item No.	Description	Height Price Pe	er Foot Less Than 1000 Ft.	1,000 Ft. +	2,000 Ft. +
3V29-	2" x 9-Gauge Vinyl Fabric	3′			
42V29-	2" x 9-Gauge Vinyl Fabric	42"			
4V29-	2" x 9-Gauge Vinyl Fabric	4′	, and the second se		
5V29-	2" x 9-Gauge Vinyl Fabric	5′			
6V29-	2" x 9-Gauge Vinyl Fabric	6′			
7V29-	2" x 9-Gauge Vinyl Fabric	7′	,		
8V29-	2" x 9-Gauge Vinyl Fabric	8′			
10V29-	2" x 9-Gauge Vinyl Fabric	10′			
12V29-	2" x 9-Gauge Vinyl Fabric	12′			

	SYSTEM 21 COLO	R VINYL	COATED RESIDENTIAL 2	2" x 6-GAUGE FA	BRIC
Item No.	Description	Height	Price Per Foot Less Than 1000 Ft.	1,000 Ft. +	2,000 Ft. +
4V26-	2" x 6-Gauge Vinyl Fabric	4′			
6V26-	2" x 6-Gauge Vinyl Fabric	6'			
8V26-	2" x 6-Gauge Vinyl Fabric	8'			

	SYSTEM 21 COLOR VI	NYL COA	ATED TENNIS COURT 1-	<u>3/4" x 9-gauge</u>	FABRIC
Item No.	Description	Height	Price Per Foot Less Than 1000 Ft.	1,000 Ft. +	2,000 Ft. +
8V1759-	1-3/4" x 9-Gauge Vinyl Fabric	8′			
10V1759-	1-3/4" x 9-Gauge Vinyl Fabric	10′			
12V1759-	1-3/4" x 9-Gauge Vinyl Fabric	12′			

	SYSTEM	A 21 CO	LOR VINYL COATED POO	OL FABRIC	
Item No.	Description	Height	Price Per Foot Less Than 1000 Ft.	1,000 Ft. +	2,000 Ft. +
4V1259-	1-1/4" x 9-Gauge Vinyl Fabric	4′			
4V12511-	1-1/4" x 11-Gauge Vinyl Fabric	4′			
5V12511-	1-1/4" x 11-Gauge Vinyl Fabric	5′			
6V12511-	1-1/4" x 11-Gauge Vinyl Fabric	6′			

OTHER HEIGHTS, LINK SIZES, AND WIRE GAUGES AVAILABLE UPON REQUEST

Eastern Chain Link 04/24/23

1.800.339.3362 • www.easternfence.com

COLOR PIPE RESIDENTIAL



EASTERN SYSTEM 21™

"The Color Fence System Of The Twenty First Century"

Specs: 3-4 Mills Bonded Polyester Powder Coating **Colors:** Black - (BK), Brown - (BR), Eastern Green - (EG)

	RESIDEN	TIAL - LT. C	OMMERO	IAL SIZES			
Item#	Nominal O.D.	Bndl. Count	Wall	Length	Loose Ea.	Per Ea. Bundle	Per 5 Bundle
21-R1321	1-3/8" x 21' SWG Color	91	0.055	21'SW			
21-1522	1-5/8" x 22' SWG Color (Black Only)	61	0.065	22′			
21-1524	1-5/8" x 24' Color	61	0.065	24′			
21-224	2" x 24' Color	61	0.065	24′			
21-2521	2-1/2" x 21' Color	37	0.065	21'			
21-2524	2-1/2" x 24' Color	37	0.065	24′			
21-321	.120 3" x 21' Color	19	0.12	21′			
21-324	.120 3" x 24'Color	19	0.12	24′			
		CUT F	PIPE				
Item#	Length	Bndl. Count			Loose Ea.	Per Ea. Bundle	Per 5 Bundle
1-5/8" CUT POSTS	1.22 LBS. PER FT.						
21-1506-	1-5/8" x 6' Color	61					
21-1507-	1-5/8" x 7' Color	61					
21-1508-	1-5/8" x 8' Color	61					
21-15 other cuts	1-5/8" PER FT. PRICE OTHER CUTS						
2" CUT POSTS	1.41 LBS. PER FT.	61					
21-206-	2" x 6' Color	61					
21-207-	2" x 7' Color	61					
21-208-	2" x 8' Color	61					
21-2 other cuts	2" PER FT. PRICE OTHER CUTS						
2-1/2" CUT POSTS	1.60 LBS. PER FT.						
21-2506-	2-1/2" x 6' Color	37					
21-2507-	2-1/2" x 7' Color	37					
21-2508-	2-1/2" x 8' Color	37					
21-25 other cuts	2-1/2" PER FT. PRICE OTHER CUTS						
3" CUT POSTS	.120 WALL • 3.53 LBS. PER FT.						
21-308-	3" x 8'.120 Wall Color	19					
21-3106-	3" x 10-1/2'.120 Wall Color	19					
21-313-	3" x 13'.120 Wall Color	19					
21-3 other cuts	3" PER FT. PRICE OTHER CUTS						

Eastern Chain Link 04/24/23

1.800.339.3362 • www.easternfence.com

COLOR PIPE LIGHT COMMERCIAL System 21 COLOR CHAIN LINK FENCE

EASTERN SYSTEM 21™

"The Color Fence System Of The Twenty First Century"

Specs: 3-4 Mills Bonded Polyester Powder Coating

COLOR: BLACK-BK, EASTERN GREEN-EG, BROWN-BR

	SYSTEM 21TM SPEC. INDUST		ZES - COI	MMERCIAL		COURT	
Item#	Nominal O.D.	Bndl. Count	Wall	Length	Loose Ea.	Per Ea. Bundle	Per 5 Bundle
21-SS1521-	1-5/8" x 21' SWG Color	61	0.095	21'SW			
21-SS224-	2" x 24' Color	61	0.095	24′			
21-SS2521-	2-1/2" x 21' Color	37	0.11	21′			
21-SS2524-	2-1/2" x 24' Color	37	0.11	24′			
21-321-	3"x 21'Color	19	0.12	21′			
		CUT P	PIPE				
Item#	Length	Bndl. Count			Loose Ea.	Per Ea. Bundle	Per 5 Bundle
2-1/2" CUT POSTS	.110 WALL • 2.64 LBS. PER FT. • 55,000 PSI						
21-SS2508-	2-1/2" x 8' .110 Wall Color	37					
21-SS25106-	2-1/2" x 10-1/2' .110 Wall Color	37					
21-SS2512-	2-1/2" x 12' .110 Wall Color	37					
21-SS2513-	2-1/2" x 13' .110 Wall Color	37					
21-SS25 other cuts	2-1/2" PER FT. PRICE OTHER CUTS						
3" CUT POSTS	.120 WALL • 3.53 LBS. PER FT. • 55,000 PSI						
21-308-	3" x 8' .120 Wall Color	19					
21-3106-	3" x 10-1/2:120 Wall Color	19					
21-312-	3"x 12'.120 Wall Color	19					
21-313-	3" x 13'.120 Wall Color	19					
21-3 other cuts	3" PER FT. PRICE OTHER CUTS						

SYSTEM III & IV COLOR COMMERCIAL PIPE System 21

EASTERN VINYL SYSTEM III & IV

Spec. Industrial Framework

System III Specs: Conforms to Federal Specification RRF-191/3C, Class 1, Grade B

System IV Specs: 1.8 oz. per sq. ft. coating conforms to Federal Specification RRF-

191/3C CLASS 1, Grade A, and ASTM F1083

COLOR: BLACK-BK, EASTERN GREEN-EG, BROWN-BR

INDUSTRIAL AND SPEC LT. COMMERCIAL SIZES								
Item#	Description	Nominal O.D.	Wall	Length	Bndl. Count	Loose Ea.	Per Ea. Bundle	Per 5 Bundle
SY31521-	1-5/8" x 21' Bonded PVC Coated SS-40	1-5/8"	0.111	21′	61			
SY3224-	2" x 24' Bonded PVC Coated SS-40	2"	0.12	24′	61			
SY32521-	2-1/2" x 21' Bonded PVC Coated SS-40	2-1/2"	0.13	21′	37			
SY32524-	2-1/2" x 24' Bonded PVC Coated SS-40	2-1/2"	0.13	24′	37			
SY3321-	3" x 21' Bonded PVC Coated SS-40	3″	0.16	21′	19			
SY3324-	3" x 24' Bonded PVC Coated SS-40	3″	0.16	24"	19			
SY4421-	4" x 21' Bonded PVC Coated SCH 40	4"	0.16	21′	19			
SY4621	6-5/8" x 21' Bonded PVC Coated SCH 40	6-5/8"	0.28	21′	7			
SY3/4 CUTS	PER FT. PRICE OTHER CUTS CALL FOR BUNDLE QUOTES							

CUT PIPE Call for Quote

PHYSICAL PROPERTIES

Framework is manufactured from high tensile steel and cold-formed for exceptional strength. SS40 fence pipe is manufactured in full compliance with ASTM F-1043.

SUPERIOR CORROSION RESISTANCE

After the in-line galvanizing process, a three mil. coating of high-quality color polyester is applied and heat set.

DURABLE FINISH

The result is a durable finish that will retain its beauty for years to come even under the most severe conditions.

SIZE • WEIGHT • BUNDLE DATA

Nominal O.D.	Wall	Lbs./Ft.	Pcs./Bndl.
1-5/8"	.111	1.863	61
2"	.120	2.28	61
2-1/2"	.130	3.12	61
3"	.160	4.64	37
4"	.160	6.560	19
6-5/8"	.280	18.97	19



COLOR: BLACK-BK, EASTERN GREEN-EG, BROWN-BR

	COL	LOR: BLACK-BK, EA			-	BROWN-BR
		ALUMI	NUM LI	NE TOPS	5	
Item#	Size	Description	Case Qty.	Loose	Case	
ALT153-*	1-5/8" x 1-3/8"	Color Aluminum Line Post Top	200			
ALT213-*	2" x 1-3/8"	Color Aluminum Line Post Top	100			
ALT215-*	2" x 1-5/8"	Color Aluminum Line Post Top	100			
ALT255-*	2-1/2" x 1-5/8"	Color Aluminum Line Post Top	100			
		GALVA	NIZED L	INE TOP		
Item#	Size	Description	Case Qty.	Loose	Case	
GLT215-*	2" x 1-5/8"	Color Galvanized Steel Line Post Top	100			
GLT255-*	2-1/2" x 1-5/8"	Color Galvanized Steel Line Post Top	100			
GLT315-*	3" x 1-5/8"	Color Galvanized Steel Line Post Top	100			
		ALUMI	NUM PO	OST CAP	S	
Item#	Size	Description	Case Qty.	Loose	Case	
APC138-*	1-3/8"	Color Aluminum Cap	100			
APC158-*	1-5/8"	Color Aluminum Cap	100			
APC200-*	2"	Color Aluminum Cap	100			
APC250-*	2-1/2"	Color Aluminum Cap	50			
APC300-*	3"	Color Aluminum Cap	50			
		GALVAN	NIZED P	OST CAP	S	
Item#	Size	Description	Case Qty.	Loose	Case	
GPC250-*	2-1/2"	Color Galvanized Steel Cap	100			
GPC300-*	3"	Color Galvanized Steel Cap	100			
GPC400-*	4"	Color Galvanized Steel Cap	25			
GPC658-*	6-5/8"	Color Galvanized Steel Cap	10			
		ALUMI	NUM RA	AIL END:	S	
ltem#	Size	Description	Case Qty.	Loose	Case	
ARE138-*	1-3/8″	Color Aluminum Rail End	500			
ARE158-*	1-5/8″	Color Aluminum Rail End	250			

* = COMBINE 10 CASES OF ANY SYSTEM 21 OR GALV. CHAIN LINK FITTINGS WITH AN ASTERISK FOR A 20% DISCOUNT

Eastern Chain Link 04/24/23

1.800.339.3362 • www.easternfence.com

Page B-18



COLOR: BLACK-BK, EASTERN GREEN-EG, BROWN-BR

		LON. DEACK-DIN, EASTE	INIT MILLET	La, bi	101111			
		BEVELED TE	INSION BANDS					
Item#	Size	Description	Case Qty.	Loose	Case			
BTB138-*	1-3/8"	Color Beveled Tension Band	250			_		
BTB158-*	1-5/8"	Color Beveled Tension Band	250					
BTB200-*	2"	Color Beveled Tension Band	250					
BTB250-*	2-1/2"	Color Beveled Tension Band	250					
BTB300-*	3"	Color Beveled Tension Band	100					
BTB400-*	4"	Color Beveled Tension Band	100					
BTB658-*	6-5/8"	Color Beveled Tension Band	100			_		
		BEVELED B	BRACE BANDS					
ltem#	Size	Description	Case Qty.	Loose	Case			
BBB138-*	1-3/8"	Color Beveled Brace Band	250					
BBB158-*	1-5/8"	Color Beveled Brace Band	250					
BBB200-*	2"	Color Beveled Brace Band	250					
BBB250-*	2-1/2"	Color Beveled Brace Band	250					
BBB300-*	3″	Color Beveled Brace Band	100					
BBB400-*	4"	Color Beveled Brace Band	100					
BBB658-*	6-5/8"	Color Beveled Brace Band	50			_		
GATE CLIPS								
Item#	Size	Description	Case Qty.	Loose	Case			
GC138-*	1-3/8"	1-3/8" Color Gate Clip	250					
		ALUMINUM ANI	STEEL HOOK T	IES				

	ALUMINUM AND STEEL HOOK TIES						
Item#	Size	Description	Case Qty.	Loose	Case		
AFT9S-*	9-Gauge x 6-3/4"	9-Gauge x 6-1/2" Aluminum Hook Tie Vinyl Coated	37				
AFT9L-*	9-Gauge x 8-1/2"	9-Gauge x 8-1/4" Aluminum Hook Tie Vinyl Coated	31				
SFT91-*	9-Gauge x 8-1/2"	9-Gauge x 8-1/4" Steel Hook Tie Vinyl Coated	10				

SFT9L-*	9-Gauge x 8-1/2"	9-Gauge x 8-1/4" Steel Hook Tie Vinyl Coated	10						
	FIBERGLASS AND STEEL TENSIONS BARS								
Item#	Size	Description	Case Qty. Loose	Case					
FGB4-	48"	4' Fiberglass Tension Bar	25		_				
FGB5-	60"	5' Fiberglass Tension Bar	25		_				
FGB6-	72"	6' Fiberglass Tension Bar	25		_				
FGB7-	84"	7' Fiberglass Tension Bar	25		_				
FGB8-	96"	8' Fiberglass Tension Bar	25						
FGB10-	120"	10' Fiberglass Tension Bar	25						
FGB12-	144"	12' Fiberglass Tension Bar	25						
STB6-	72″	6' Color Steel Tension Bar	25		_				
STB8-	96"	8' Color Steel Tension Bar	25		_				
STB10-	120"	10' Color Steel Tension Bar	25		_				
STB12-	144"	12' Color Steel Tension Bar	25						

* = COMBINE 10 CASES OF ANY SYSTEM 21 OR GALV. CHAIN LINK FITTINGS WITH AN ASTERISK FOR A 20% DISCOUNT



COLOR: BLACK-BK, EASTERN GREEN-EG, BROWN-BR

	COL	OR: BLACK-BK, EA			I-EG, D	ORUWIN-DR
			OARLOCK:	S		
Item#	Size	Description	Case Qty.	Loose	Case	
OAR138-*	1-3/8" x 1-3/8"	Color Oarlock Latch	100			
OAR213-*	2" x 1-3/8"	Color Oarlock Latch	100			
OAR215-*	2" x 1-5/8"	Color Oarlock Latch	100			
OAR253-*	2-1/2" x 1-3/8"	Color Oarlock Latch	100			Hamile
OAR255-*	2-1/2" x 1-5/8"	Color Oarlock Latch	100			P P
OAR315-*	3" x 1-5/8"	Color Oarlock Latch	100			
			BLE POST	HINGES	5	
Item#	Size	Description	Case Qty.	Loose	Case	
MPH200-*	2″	Color Malleable Post Hinge	50			
MPH250-*	2-1/2"	Color Malleable Post Hinge	50			
MPH300-*	3″	Color Malleable Post Hinge	50			Alton .
			BLE FRAM	E UINCE	C	
Item#	Size	Description IVIALLEAD	Case Qty.	Loose	Case	
		-		Loose	Case	
MFH138-*	1-3/8"	Color Malleable Frame Hinge	50			
MFH158-*	1-5/8"	Color Malleable Frame Hinge	50			
				FFVFC		
			ANIZED SL			
Item#	Size	Description	Case Qty.	Loose	Case	_
GSL138-*	1-3/8"	Color Galvanized Steel Sleeve	100			
	4 5 1011		400			The Same
GSL158-*	1-5/8"	Color Galvanized Steel Sleeve	100			
		MISCEI	LLANEOUS	SITEMS		
Item#	Size	Description	Case Qty.	Loose	Case	
SPRAY-*	SPRAY	Touch-Up Spray Paint	12			· · · · · · · · · · · · · · · · · · ·
	31100	Touch op spray raint	12			
RDR-*	RES	Color Residential Drop Rod	25			STON BU
PFH138-*	RES	Color Drop Pod Cuido 1 2/9"	100			
РГП 130-	KES	Color Drop Rod Guide 1-3/8"	100			PAINT BLACK
SCR18-*	18"	Color Aluminum Gate Scroll 18"	50			
		ALUMINUM AN	ID CTEEL	CATE CO	DNEDC	
14am #	C:	Description ALUIVIINUIVI AI				
Item#	Size	Description	Case Qty.	Loose	Case	
AGC138-*	1-3/8"	Color Aluminum Gate Corner	100			5-00-
AUC130-	1-3/0	Color Aluminum date Comer	100			
		ALUMINUMA	ID CTEEL	CATE CO	DNEDC	
		ALUMINUM AN				
Item#	Size	Description	Case Qty.	Loose	Case	
SGC158-*	1-5/8"	Color Galvanized Steel Gate Corner	50			
						1 house

* = COMBINE 10 CASES OF ANY SYSTEM 21 OR GALV. CHAIN LINK FITTINGS WITH AN ASTERISK FOR A 20% DISCOUNT

Eastern Chain Link 04/24/23

1.800.339.3362 • www.easternfence.com

Page B-20




COLOR: BLACK-BK, EASTERN GREEN-EG, BROWN-BR

	MISCELLANEOUS ITEMS						
Item#	Description	Case Qty. Loose					
AHR-*	9-Gauge x 500 Pcs. Color Aluminum Hog Rings		0				
CW9-	9-Gauge x 500 Ft. Color 9-Gauge Straight Coil Wire x 500'						
CW6-	6-Gauge x 1000 Ft. Color 6-Gauge Coil Spring Tension Wire x 1000'						
BW-	12½-Gauge x 4 Pt. x 5" x 1320 Ft. Color Barb Wire 4-PT, 1320'		≠				
BA215-*	2" x 1-5/8" Color Barb Wire 4-PT, 1320'		0				
BA255-*	2-1/2" x 1-5/8" Color Barb Wire 4-PT, 1320'						
CBA250-*	2-1/2" Color Corner Barb Arm 3-ST						
CBA300-*	3" Color Corner Barb Arm 3-ST						
CBA400-*	4" Color Corner Barb Arm 3-ST						
BVD215-*	2" x 1-5/8" Color Bottom Rail Line Rail Clamp (5/16" x 2-1/2" Bolt Required)	125					
BVD255-*	2-1/2" x 1-5/8" Color Bottom Rail Line Rail Clamp (3/8" x 2-1/2" Bolt Required)	50					
BVD315-*	3" x 1-5/8" Color Bottom Rail Line Rail Clamp (3/8" x 2-1/2" Bolt Required)	50					
BVD138-*	1-3/8" x 1-3/8" Color Bottom Rail Line Rail Clamp (5/16" x 2" Bolt Required)						
BVD158-*	1-5/8" x 1-5/8" Color Bottom Rail Line Rail Clamp (5/16" x 2" Bolt Required)	24					
BVD200-*	2" x 2" Color Bottom Rail Line Rail Clamp (5/16" x 2-1/2"Bolt Required)						
EC215-*	2" x 1-5/8" Color End Rail Clamp (3/8" x 2-1/2" Bolt Required)	100	_				
EC255-*	2-1/2" x 1-5/8" Color End Rail Clamp (3/8" x 2-1/2" Bolt Required)	80					
EC315-*	3" x 1-5/8" Color End Rail Clamp (3/8" x 2-1/2" Bolt Required)	80					
EC138-*	1-3/8" x 1-3/8" Color End Rail Clamp (5/16" x 2" Bolt Required)	24					
EC158-*	1-5/8" x 1-5/8" Color End Rail Clamp (3/8" x 2-1/2" Bolt Required)	24					
EC200-*	2" x 2" Color End Rail Clamp (5/16" x 2-1/2" Bolt Required)						
I0H250-*	2-1/2" Color Industrial Hinge -180-MAL	12	# (C)				
I0H300-*	3" Color Industrial Hinge -180-MAL	12	Comments of the Comments of th				
10H400-*	4" Color Industrial Hinge -180-MAL	12	هي هي				
10H658-*	6-5/8" Color Industrial Hinge -180-MAL	12					
IBH250-*	2-1/2" x2" (or 1-5/8") Industrial Box Hinge	12					
IBH300-*	3" x 2" (or 1-5/8") Industrial Box Hinge	12					
IBH400-*	4" x 2" (or 1-5/8") Industrial Box Hinge	12					
IBH658-*	6-5/8" x 2" (or 1-5/8") Industrial Box Hinge	12					
IBH858-*	8-5/8" x 2" (or 1-5/8") Industrial Box Hinge	12	1- 01 - 1				
180ATT*	180-Degree Box Hinge Adaptor (Galv Only) Industrial Box Hinge	24					

ILD-* 1-5/8" OR 2" Color Industrial Locking Device

- O



★ = COMBINE 10 CASES OF ANY SYSTEM 21 OR GALV. CHAIN LINK FITTINGS WITH AN ASTERISK FOR A 20% DISCOUNT

12

SYSTEM 21 COLOR RESI GATE FRAMES (COMPLETE) 500



SYSTEM 21 FRAMES - SPEC. COLORED FRAMEWORK - RESIDENTIAL GRADE

Welded Fabrication using System 21TM .055 wall framework

COLORS AVAILABLE: BLACK (BK), BROWN (BR), EASTERN GREEN (EG) | ***COLOR MUST BE REQUESTED WHEN ORDERING****
Frames below are filled (F) with standard 2"x9 gauge fabric excluding the 21FIG158-47

(Tennis gate is filled with 1-3/4"x 9 gauge wire as a standard)

Item No.	Nominal O.D.	Description	Opening	Height	Loose Each
21F34-	1-3/8"	Color Single Gate	36"	4′	
21F35-	1-3/8"	Color Single Gate	36"	5′	
21F36-	1-3/8"	Color Single Gate	36"	6′	
21F424-	1-3/8"	Color Single Gate	42"	4′	
21F425-	1-3/8"	Color Single Gate	42"	5′	
21F426-	1-3/8"	Color Single Gate	42"	6′	
21F44-	1-3/8"	Color Single Gate	48"	4′	
21F45-	1-3/8"	Color Single Gate	48"	5′	
21F46-	1-3/8"	Color Single Gate	48"	6′	
21F54-	1-3/8"	Color Single Gate	60"	4′	
21F55-	1-3/8"	Color Single Gate	60"	5′	
21F56-	1-3/8"	Color Single Gate	60"	6'	
21F84-	1-3/8"	Color Double Drive	96"	4′	
21F85-	1-3/8"	Color Double Drive	96"	5′	
21F86-	1-3/8"	Color Double Drive	96"	6′	
21F104-	1-3/8"	Color Double Drive	120"	4′	
21F105-	1-3/8"	Color Double Drive	120"	5′	
21F106-	1-3/8"	Color Double Drive	120"	6′	
21F124-	1-3/8"	Color Double Drive	144"	4′	
21F125-	1-3/8"	Color Double Drive	144"	5′	
21F126-	1-3/8"	Color Double Drive	144"	6′	
21FIG158-47-	1-5/8"	Color Tennis Gate	48"	7′	

UNFILLED FRAMES ALSO AVAILABLE*

Note: To order unfilled frames only please use code above without the (F)

Scrolls are fastened on 4' high gates ONLY. 5' high and up are center braced.

Gates will be wrapped for shipping / Hardware sold separately

Non-stock sizes available upon request - Call for \$\$



SYSTEM 21 color industrial walk gates (complete)



SPEC COLORED INDUSTRIAL FRAMES: BLACK (BK), BROWN (BR), EASTERN GREEN (EG),

Welded Fabrication using System 21TM | ***Heavier weight pipe available upon request, call for \$***
Frames only — No fabric included | ***COLOR MUST BE REQUESTED WHEN ORDERING***

			SINGLEWALK GATES	
Item#	Frame Size	Opening	Height Each Loose	
21IG158-34-	1-5/8"	3' OPENING	4' High	_
21IG158-35-	1-5/8"	3' OPENING	5' High	_
21IG158-36-	1-5/8"	3' OPENING	6' High	1 ME
21IG158-37-	1-5/8"	3' OPENING	7' High	FRAME
21IG158-38-	1-5/8″	3' OPENING	8' High	ONL
21IG158-44-	1-5/8"	4' OPENING	4' High	_
21IG158-45-	1-5/8"	4' OPENING	5' High	_
21IG158-46-	1-5/8"	4' OPENING	6' High	FRAME CONFIGURATIONS
21IG158-47-	1-5/8"	4' OPENING	7' High	▲ STANDARD ★
21IG158-48-	1-5/8″	4' OPENING	8' High	
21IG158-54-	1-5/8"	5' OPENING	4' High	
21IG158-55-	1-5/8"	5' OPENING	5' High	
21IG158-56-	1-5/8"	5' OPENING	6'High	PLUS 1 → I
21IG158-57-	1-5/8"	5' OPENING	7' High	FOR BARBWIRE
21IG158-58-	1-5/8″	5' OPENING	8' High	
21IG200-36-	2"	3' OPENING	6' High	
21IG200-37-	2"	3' OPENING	7' High	
21IG200-38-	2"	3' OPENING	8' High	_
21IG200-46-	2"	4' OPENING	6' High	
21IG200-47-	2″	4' OPENING	7' High	FILLED SO
21IG200-48-	2"	4' OPENING	8' High	FILLED FRAME ALSO AVAILABLE
21IG200-56-	2"	5' OPENING	6' High	AVAIL
21IG200-57-	2″	5' OPENING	7' High	_
21IG200-58-	2"	5' OPENING	8' High	_

SYSTEM 21 COLOR INDUSTRIAL DOUBLE DRIVE GATES (COMPLETE) System 21



SPEC COLORED INDUSTRIAL FRAMES: BLACK (BK), BROWN (BR), EASTERN GREEN (EG),


Welded Fabrication using System 21TM | ***Heavier weight pipe available upon request, call for \$*** Frames only — No fabric included | ***COLOR MUST BE REQUESTED WHEN ORDERING***

Trans Trans Size Dopening Height Each Loose				DOUBLE DOU	VE CATES
2116158-104-	Itom#	Erama Siza	Oponing		
21 G158-105- 1-5/8" 10' OPENING 5' High 21 G158-107- 1-5/8" 10' OPENING 7' High 21 G158-107- 1-5/8" 10' OPENING 7' High 21 G158-108- 1-5/8" 12' OPENING 4' High 21 G158-124- 1-5/8" 12' OPENING 4' High 21 G158-125- 1-5/8" 12' OPENING 5' High 21 G158-126- 1-5/8" 12' OPENING 6' High 21 G158-127- 1-5/8" 12' OPENING 5' High 21 G158-127- 1-5/8" 12' OPENING 6' High 21 G158-128- 1-5/8" 12' OPENING 6' High 21 G158-128- 1-5/8" 12' OPENING 6' High 21 G158-144- 1-5/8" 14' OPENING 5' High 21 G158-144- 1-5/8" 14' OPENING 6' High 21 G158-144- 1-5/8" 14' OPENING 5' High 21 G158-144- 1-5/8" 14' OPENING 6' High 21 G158-148- 1-5/8" 14' OPENING 6' High 21 G158-148- 1-5/8" 14' OPENING 8' High 21 G158-148- 1-5/8" 14' OPENING 8' High 21 G158-166- 1-5/8" 16' OPENING 6' High 21 G158-166- 1-5/8" 16' OPENING 6' High 21 G158-166- 1-5/8" 16' OPENING 6' High 21 G158-188- 1-5/8" 18' OPENING 6' High 21 G200-106- 2" 10' OPENING 6' High 21 G200-146- 2" 12' OPENING 6' High 21 G200-188- 2" 12' OPENING 6' High 21 G200-188- 2" 12' OPENING 6' High 21 G200-188- 2" 12' OPENING 6' High 21 G200-266- 2" 22' OPENING 6' High 21 G200-266- 2" 22' OPENI					Each Loose
21 G158-106- 1-5/8" 10' OPENING 6' High 21 G158-107- 1-5/8" 10' OPENING 8' High 21 G158-108- 1-5/8" 12' OPENING 8' High 21 G158-124- 1-5/8" 12' OPENING 4' High 21 G158-125- 1-5/8" 12' OPENING 5' High 21 G158-125- 1-5/8" 12' OPENING 6' High 21 G158-126- 1-5/8" 12' OPENING 7' High 21 G158-127- 1-5/8" 12' OPENING 8' High 21 G158-128- 1-5/8" 12' OPENING 8' High 21 G158-144- 1-5/8" 14' OPENING 4' High 21 G158-144- 1-5/8" 14' OPENING 5' High 21 G158-145- 1-5/8" 14' OPENING 6' High 21 G158-145- 1-5/8" 14' OPENING 6' High 21 G158-146- 1-5/8" 14' OPENING 8' High 21 G158-148- 1-5/8" 14' OPENING 8' High 21 G158-164- 1-5/8" 16' OPENING 5' High 21 G158-164- 1-5/8" 16' OPENING 5' High 21 G158-166- 1-5/8" 16' OPENING 6' High 21 G158-166- 1-5/8" 16' OPENING 6' High 21 G158-166- 1-5/8" 16' OPENING 6' High 21 G158-168- 1-5/8" 16' OPENING 7' High 21 G158-188- 1-5/8" 16' OPENING 8' High 21 G158-188- 1-5/8" 16' OPENING 6' High 21 G158-188- 1-5/8" 16' OPENING 6' High 21 G158-188- 1-5/8" 16' OPENING 7' High 21 G158-188- 1-5/8" 16' OPENING 6' High 21 G158-188- 1-5/8" 18' OPENING 5' High 21 G158-188- 1-5/8" 18' OPENING 6' High 21 G158-188- 1-5/8" 18' OPENING 6' High 21 G158-188- 1-5/8" 18' OPENING 6' High 21 G200-106- 2" 10' OPENING 6' High 21 G200-126- 2" 10' OPENING 6' High 21 G200-144- 2" 14' OPENING 6' High 21 G200-144- 2" 14' OPENING 6' High 21 G200-148- 2" 12' OPENING 6' High 21 G200-166- 2" 12' OPENING 6' High 21 G200-166- 2" 12' OPENING 6' High 21 G200-166- 2" 12' OPENING 6' High 21 G200-266- 2" 22' OPENING 6' High 21 G200-266- 2" 22' OPENING					
21 G158-107- 1-5/8" 10' OPENING 7' High 21 G158-108- 1-5/8" 10' OPENING 8' High 21 G158-124- 1-5/8" 12' OPENING 8' High 21 G158-124- 1-5/8" 12' OPENING 4' High 21 G158-125- 1-5/8" 12' OPENING 6' High 21 G158-126- 1-5/8" 12' OPENING 6' High 21 G158-127- 1-5/8" 12' OPENING 7' High 21 G158-128- 1-5/8" 12' OPENING 4' High 21 G158-128- 1-5/8" 14' OPENING 4' High 21 G158-144- 1-5/8" 14' OPENING 4' High 21 G158-144- 1-5/8" 14' OPENING 5' High 21 G158-144- 1-5/8" 14' OPENING 6' High 21 G158-144- 1-5/8" 14' OPENING 6' High 21 G158-144- 1-5/8" 14' OPENING 7' High 21 G158-144- 1-5/8" 14' OPENING 8' High 21 G158-144- 1-5/8" 14' OPENING 8' High 21 G158-146- 1-5/8" 16' OPENING 8' High 21 G158-164- 1-5/8" 16' OPENING 8' High 21 G158-165- 1-5/8" 16' OPENING 6' High 21 G158-165- 1-5/8" 16' OPENING 6' High 21 G158-166- 1-5/8" 16' OPENING 6' High 21 G158-168- 1-5/8" 16' OPENING 6' High 21 G158-184- 1-5/8" 16' OPENING 8' High 21 G158-184- 1-5/8" 18' OPENING 8' High 21 G158-184- 1-5/8" 18' OPENING 6' High 21 G158-188- 1-5/8" 18' OPENING 6' High 21 G200-106- 2" 10' OPENING 7' High 21 G200-108- 2" 10' OPENING 8' High 21 G200-126- 2" 10' OPENING 8' High 21 G200-146- 2" 10' OPENING 8' High 21 G200-167- 2" 10' OPENING 8' High 21 G200-166- 2" 10' OPENING 8' High 21 G200-166- 2" 10' OPENING 8' High 21 G200-166- 2" 10' OPENING 8'					
21 G158-108-					
21 G158-124- 1-5/8" 12' OPENING					
21 G158-125- 1-5/8" 12' OPENING 5' High 21 G158-126- 1-5/8" 12' OPENING 6' High 21 G158-127- 1-5/8" 12' OPENING 6' High 21 G158-128- 1-5/8" 12' OPENING 8' High 21 G158-128- 1-5/8" 14' OPENING 4' High 21 G158-144- 1-5/8" 14' OPENING 4' High 21 G158-144- 1-5/8" 14' OPENING 5' High 21 G158-144- 1-5/8" 14' OPENING 6' High 21 G158-144- 1-5/8" 14' OPENING 6' High 21 G158-147- 1-5/8" 14' OPENING 7' High 21 G158-147- 1-5/8" 14' OPENING 8' High 21 G158-148- 1-5/8" 16' OPENING 8' High 21 G158-166- 1-5/8" 16' OPENING 6' High 21 G158-166- 1-5/8" 16' OPENING 6' High 21 G158-166- 1-5/8" 16' OPENING 8' High 21 G158-168- 1-5/8" 16' OPENING 8' High 21 G158-184- 1-5/8" 16' OPENING 8' High 21 G158-185- 1-5/8" 16' OPENING 8' High 21 G158-185- 1-5/8" 18' OPENING 8' High 21 G158-185- 1-5/8" 18' OPENING 6' High 21 G158-185- 1-5/8" 18' OPENING 6' High 21 G158-188- 1-5/8" 18' OPENING 6' High 21 G158-188- 1-5/8" 18' OPENING 6' High 21 G158-188- 1-5/8" 18' OPENING 6' High 21 G100-106- 2" 10' OPENING 8' High 21 G200-106- 2" 10' OPENING 8' High 21 G200-106- 2" 10' OPENING 8' High 21 G200-106- 2" 10' OPENING 8' High 21 G200-127- 2" 10' OPENING 6' High 21 G200-128- 2" 12' OPENING 6' High 21 G200-128- 2" 12' OPENING 6' High 21 G200-148- 2" 14' OPENING 6' High 21 G200-148- 2" 14' OPENING 6' High 21 G200-187- 2" 16' OPENING 6' High 21 G200-188- 2" 16' OPENING 6' High 21 G200-188- 2" 16' OPENING 6' High 21 G200-266- 2" 22' OPENING 6' High 21 G200-306- 2" 30' OPENING 6' High 21 G200-306-					
21 G158-126- 1-5/8" 12' OPENING					
21 G158-127- 1-5/8" 12' OPENING 7' High 21 G158-128- 1-5/8" 12' OPENING 8' High 21 G158-144- 1-5/8" 14' OPENING 4' High 21 G158-144- 1-5/8" 14' OPENING 4' High 21 G158-145- 1-5/8" 14' OPENING 6' High 21 G158-146- 1-5/8" 14' OPENING 7' High 21 G158-146- 1-5/8" 14' OPENING 7' High 21 G158-148- 1-5/8" 14' OPENING 8' High 21 G158-164- 1-5/8" 16' OPENING 4' High 21 G158-165- 1-5/8" 16' OPENING 6' High 21 G158-166- 1-5/8" 16' OPENING 7' High 21 G158-166- 1-5/8" 16' OPENING 7' High 21 G158-168- 1-5/8" 16' OPENING 8' High 21 G158-188- 1-5/8" 16' OPENING 8' High 21 G158-188- 1-5/8" 18' OPENING 5' High 21 G158-188- 1-5/8" 18' OPENING 5' High 21 G158-188- 1-5/8" 18' OPENING 6' High 21 G200-106- 2" 10' OPENING 8' High 21 G200-106- 2" 10' OPENING 6' High 21 G200-126- 2" 10' OPENING 8' High 21 G200-126- 2" 10' OPENING 8' High 21 G200-126- 2" 12' OPENING 8' High 21 G200-147- 2" 12' OPENING 6' High 21 G200-148- 2" 12' OPENING 6' High 21 G200-186- 2" 12' OPENING 6' High 21 G200-186- 2" 12' OPENING 6' High 21 G200-186- 2" 12' OPENING 6' High 21 G200-188- 2" 12' OPENING 6' High 21 G200-188- 2" 12' OPENING 6' High 21 G200-188- 2" 12' OPENING 6' High 21 G200-266- 2" 22' OPENING 6' High 21 G200-266- 2" 26' OPENING 6' High 21 G200-266- 2" 26' OPEN			_		
21 G158-128-					
21 G158-144- 1-5/8"					
21 G158-145-					
21 G158-146-					
21 G158-147-					
21 G158-148-					
21 G158-164- 1-5/8" 16' OPENING					
21 G158-165- 1-5/8" 16' OPENING 5' High 21 G158-166- 1-5/8" 16' OPENING 6' High 21 G158-167- 1-5/8" 16' OPENING 7' High 21 G158-168- 1-5/8" 16' OPENING 8' High 21 G158-188- 1-5/8" 18' OPENING 4' High 21 G158-185- 1-5/8" 18' OPENING 5' High 21 G158-186- 1-5/8" 18' OPENING 5' High 21 G158-187- 1-5/8" 18' OPENING 6' High 21 G158-188- 1-5/8" 18' OPENING 8' High 21 G200-106- 2" 10' OPENING 6' High 21 G200-107- 2" 10' OPENING 8' High 21 G200-108- 2" 10' OPENING 8' High 21 G200-126- 2" 12' OPENING 6' High 21 G200-127- 2" 12' OPENING 6' High 21 G200-127- 2" 12' OPENING 6' High 21 G200-128- 2" 12' OPENING 7' High 21 G200-146- 2" 14' OPENING 8' High 21 G200-146- 2" 14' OPENING 6' High 21 G200-146- 2" 14' OPENING 6' High 21 G200-146- 2" 14' OPENING 6' High 21 G200-166- 2" 14' OPENING 7' High 21 G200-166- 2" 16' OPENING 7' High 21 G200-186- 2" 16' OPENING 7' High 21 G200-187- 2" 16' OPENING 7' High 21 G200-188- 2" 18' OPENING 6' High 21 G200-188- 2" 18' OPENING 6' High 21 G200-188- 2" 18' OPENING 6' High 21 G200-128- 2" 18' OPENING 6' High 21 G200-226- 2" 22' OPENING 6' High 21 G200-266- 2" 26' OPENING 6' High 21 G200-266- 2" 26' OPENING 6' High 21 G200-268- 2" 26' OPENING 7' High 21 G200-268- 2" 26' OPENING 7' High 21 G200-268- 2" 26' OPENING 7' High 21 G200-268- 2" 26' OPEN					
21 G158-166-					
21 G158-167-					
21IG158-168- 1-5/8" 16' OPENING 8' High 21IG158-184- 1-5/8" 18' OPENING 4' High 21IG158-185- 1-5/8" 18' OPENING 5' High 21IG158-186- 1-5/8" 18' OPENING 6' High 21IG158-187- 1-5/8" 18' OPENING 7' High 21IG200-106- 2" 10' OPENING 6' High 21IG200-107- 2" 10' OPENING 7' High 21IG200-108- 2" 10' OPENING 7' High 21IG200-126- 2" 12' OPENING 6' High 21IG200-127- 2" 12' OPENING 7' High 21IG200-128- 2" 12' OPENING 7' High 21IG200-128- 2" 12' OPENING 8' High 21IG200-146- 2" 14' OPENING 7' High 21IG200-148- 2" 14' OPENING 7' High 21IG200-166- 2" 16' OPENING 6' High 21IG200-187- 2" 16' OPENING 7' High 21IG200-188- 2" <td></td> <td></td> <td></td> <td></td> <td></td>					
211G158-184- 1-5/8" 18' OPENING 4' High 211G158-185- 1-5/8" 18' OPENING 5' High 211G158-186- 1-5/8" 18' OPENING 6' High 211G158-187- 1-5/8" 18' OPENING 7' High 211G158-188- 1-5/8" 18' OPENING 8' High 211G200-106- 2" 10' OPENING 6' High 211G200-107- 2" 10' OPENING 7' High 211G200-108- 2" 10' OPENING 8' High 211G200-126- 2" 12' OPENING 6' High 211G200-127- 2" 12' OPENING 6' High 211G200-128- 2" 12' OPENING 8' High 211G200-128- 2" 12' OPENING 6' High 211G200-146- 2" 14' OPENING 6' High 211G200-148- 2" 14' OPENING 7' High 211G200-148- 2" 14' OPENING 8' High 211G200-166- 2" 14' OPENING 8' High 211G200-167- 2" 16' OPENING 6' High 211G200-187- 2" 16' OPENING 7' High 211G200-188- 2" 18' OPENING 7' High 211G200-188- 2" 18' OPENING 8' High 211G200-266- 2" 22' OPENING 8' High 211G200-228- 2" 22' OPENING 8' High 211G200-228- 2" 22' OPENING 7' High 211G200-266- 2" 22' OPENING 7' High 211G200-266- 2" 22' OPENING 7' High 211G200-268- 2" 26' OPENING 7' High 211G200-268- 2" 26' OPENING 7' High 211G200-268- 2" 26' OPENING 8' High 211G200-268- 2" 26' OPENING 6' High 211G200-306- 2" 30' OPENING 5' High 211G200-306- 2" 30' OPENING 5' High 211G200-307- 2" 30' OPENING 7' High 211G200-307- 2" 30' OPENING 3' High					
21IG158-185- 1-5/8" 18' OPENING 5' High 21IG158-186- 1-5/8" 18' OPENING 6' High 21IG158-187- 1-5/8" 18' OPENING 7' High 21IG158-188- 1-5/8" 18' OPENING 8' High 21IG200-106- 2" 10' OPENING 6' High 21IG200-107- 2" 10' OPENING 7' High 21IG200-108- 2" 10' OPENING 8' High 21IG200-126- 2" 12' OPENING 6' High 21IG200-127- 2" 12' OPENING 7' High 21IG200-128- 2" 12' OPENING 7' High 21IG200-146- 2" 14' OPENING 6' High 21IG200-147- 2" 14' OPENING 7' High 21IG200-148- 2" 14' OPENING 7' High 21IG200-166- 2" 16' OPENING 6' High 21IG200-186- 2" 16' OPENING 7' High 21IG200-188- 2" 18' OPENING 6' High 21IG200-188- 2"					
21IG158-186- 1-5/8" 18' OPENING 6' High 21IG158-187- 1-5/8" 18' OPENING 7' High 21IG158-188- 1-5/8" 18' OPENING 8' High 21IG200-106- 2" 10' OPENING 6' High 21IG200-107- 2" 10' OPENING 7' High 21IG200-108- 2" 10' OPENING 8' High 21IG200-126- 2" 12' OPENING 6' High 21IG200-127- 2" 12' OPENING 7' High 21IG200-128- 2" 12' OPENING 8' High 21IG200-128- 2" 12' OPENING 8' High 21IG200-146- 2" 14' OPENING 6' High 21IG200-147- 2" 14' OPENING 7' High 21IG200-148- 2" 14' OPENING 8' High 21IG200-166- 2" 16' OPENING 6' High 21IG200-167- 2" 16' OPENING 6' High 21IG200-188- 2" 18' OPENING 6' High 21IG200-188- 2"					
21IG158-187- 1-5/8" 18' OPENING 7' High 21IG158-188- 1-5/8" 18' OPENING 8' High 21IG200-106- 2" 10' OPENING 6' High 21IG200-107- 2" 10' OPENING 7' High 21IG200-108- 2" 10' OPENING 8' High 21IG200-126- 2" 12' OPENING 6' High 21IG200-127- 2" 12' OPENING 7' High 21IG200-128- 2" 12' OPENING 8' High 21IG200-146- 2" 14' OPENING 6' High 21IG200-147- 2" 14' OPENING 7' High 21IG200-148- 2" 14' OPENING 8' High 21IG200-166- 2" 16' OPENING 6' High 21IG200-186- 2" 16' OPENING 7' High 21IG200-188- 2" 18' OPENING 7' High 21IG200-188- 2" 2" 22' OPENING 7' High 21IG200-226- 2" 22' OPENING 7' High 21IG200-228- <					
21IG158-188- 1-5/8" 18' OPENING 8' High 21IG200-106- 2" 10' OPENING 6' High 21IG200-107- 2" 10' OPENING 7' High 21IG200-108- 2" 10' OPENING 8' High 21IG200-126- 2" 12' OPENING 6' High 21IG200-127- 2" 12' OPENING 7' High 21IG200-128- 2" 12' OPENING 8' High 21IG200-146- 2" 14' OPENING 6' High 21IG200-147- 2" 14' OPENING 7' High 21IG200-148- 2" 14' OPENING 8' High 21IG200-166- 2" 16' OPENING 7' High 21IG200-186- 2" 16' OPENING 7' High 21IG200-187- 2" 18' OPENING 7' High 21IG200-188- 2" 18' OPENING 7' High 21IG200-226- 2" 22' OPENING 7' High 21IG200-227- 2" 22' OPENING 7' High 21IG200-266- 2" 2	21IG158-186-	1-5/8"	18' OPENING	6' High	
21IG200-106- 2" 10' OPENING 6' High 21IG200-107- 2" 10' OPENING 7' High 21IG200-108- 2" 10' OPENING 8' High 21IG200-126- 2" 12' OPENING 6' High 21IG200-127- 2" 12' OPENING 7' High 21IG200-128- 2" 12' OPENING 8' High 21IG200-146- 2" 14' OPENING 6' High 21IG200-147- 2" 14' OPENING 7' High 21IG200-148- 2" 14' OPENING 8' High 21IG200-166- 2" 16' OPENING 6' High 21IG200-167- 2" 16' OPENING 7' High 21IG200-186- 2" 18' OPENING 6' High 21IG200-188- 2" 18' OPENING 7' High 21IG200-188- 2" 18' OPENING 8' High 21IG200-226- 2" 22' OPENING 6' High 21IG200-226- 2" 22' OPENING 7' High 21IG200-266- 2" 26' O	21IG158-187-	1-5/8"	18' OPENING	7' High	
21IG200-107- 2" 10' OPENING 7' High 21IG200-108- 2" 10' OPENING 8' High 21IG200-126- 2" 12' OPENING 6' High 21IG200-127- 2" 12' OPENING 7' High 21IG200-128- 2" 12' OPENING 8' High 21IG200-146- 2" 14' OPENING 6' High 21IG200-147- 2" 14' OPENING 7' High 21IG200-148- 2" 14' OPENING 8' High 21IG200-148- 2" 16' OPENING 6' High 21IG200-166- 2" 16' OPENING 7' High 21IG200-186- 2" 18' OPENING 7' High 21IG200-188- 2" 18' OPENING 7' High 21IG200-188- 2" 18' OPENING 8' High 21IG200-226- 2" 22' OPENING 6' High 21IG200-226- 2" 22' OPENING 7' High 21IG200-266- 2" 26' OPENING 6' High 21IG200-266- 2" 26' O	21IG158-188-	1-5/8"	18' OPENING	8' High	
21IG200-108- 2" 10' OPENING 8' High 21IG200-126- 2" 12' OPENING 6' High 21IG200-127- 2" 12' OPENING 7' High 21IG200-128- 2" 12' OPENING 8' High 21IG200-146- 2" 14' OPENING 6' High 21IG200-147- 2" 14' OPENING 7' High 21IG200-148- 2" 14' OPENING 8' High 21IG200-166- 2" 16' OPENING 6' High 21IG200-167- 2" 16' OPENING 7' High 21IG200-186- 2" 18' OPENING 6' High 21IG200-187- 2" 18' OPENING 7' High 21IG200-188- 2" 18' OPENING 8' High 21IG200-226- 2" 22' OPENING 6' High 21IG200-226- 2" 22' OPENING 7' High 21IG200-266- 2" 22' OPENING 7' High 21IG200-266- 2" 26' OPENING 7' High 21IG200-268- 2" 26' O	21IG200-106-	2"	10' OPENING	6' High	
21IG200-126- 2" 12' OPENING 6' High 21IG200-127- 2" 12' OPENING 7' High 21IG200-128- 2" 12' OPENING 8' High 21IG200-146- 2" 14' OPENING 6' High 21IG200-147- 2" 14' OPENING 7' High 21IG200-148- 2" 14' OPENING 8' High 21IG200-166- 2" 16' OPENING 6' High 21IG200-167- 2" 16' OPENING 7' High 21IG200-186- 2" 18' OPENING 6' High 21IG200-187- 2" 18' OPENING 7' High 21IG200-188- 2" 18' OPENING 8' High 21IG200-226- 2" 22' OPENING 6' High 21IG200-226- 2" 22' OPENING 7' High 21IG200-226- 2" 22' OPENING 7' High 21IG200-266- 2" 26' OPENING 6' High 21IG200-266- 2" 26' OPENING 7' High 21IG200-268- 2" 26' O	21IG200-107-	2"	10' OPENING	7′ High	
21IG200-127- 2" 12' OPENING 7' High 21IG200-128- 2" 12' OPENING 8' High 21IG200-146- 2" 14' OPENING 6' High 21IG200-147- 2" 14' OPENING 7' High 21IG200-148- 2" 14' OPENING 8' High 21IG200-166- 2" 16' OPENING 6' High 21IG200-167- 2" 16' OPENING 7' High 21IG200-186- 2" 18' OPENING 6' High 21IG200-187- 2" 18' OPENING 7' High 21IG200-188- 2" 18' OPENING 8' High 21IG200-226- 2" 22' OPENING 6' High 21IG200-227- 2" 22' OPENING 7' High 21IG200-228- 2" 22' OPENING 8' High 21IG200-266- 2" 26' OPENING 7' High 21IG200-267- 2" 26' OPENING 7' High 21IG200-306- 2" 26' OPENING 6' High 21IG200-306- 2" 26' O	21IG200-108-	2″	10' OPENING	8' High	
21IG200-128- 2" 12' OPENING 8' High 21IG200-146- 2" 14' OPENING 6' High 21IG200-147- 2" 14' OPENING 7' High 21IG200-148- 2" 14' OPENING 8' High 21IG200-166- 2" 16' OPENING 6' High 21IG200-167- 2" 16' OPENING 7' High 21IG200-186- 2" 18' OPENING 6' High 21IG200-187- 2" 18' OPENING 7' High 21IG200-188- 2" 18' OPENING 8' High 21IG200-226- 2" 22' OPENING 6' High 21IG200-227- 2" 22' OPENING 7' High 21IG200-228- 2" 22' OPENING 8' High 21IG200-266- 2" 26' OPENING 7' High 21IG200-268- 2" 26' OPENING 8' High 21IG200-306- 2" 26' OPENING 6' High 21IG200-307- 2" 30' OPENING 6' High 21IG200-307- 2" 30' O	21IG200-126-	2″	12' OPENING	6' High	
21IG200-146- 2" 14' OPENING 6' High 21IG200-147- 2" 14' OPENING 7' High 21IG200-148- 2" 14' OPENING 8' High 21IG200-166- 2" 16' OPENING 6' High 21IG200-167- 2" 16' OPENING 7' High 21IG200-186- 2" 18' OPENING 6' High 21IG200-187- 2" 18' OPENING 7' High 21IG200-188- 2" 18' OPENING 8' High 21IG200-226- 2" 22' OPENING 6' High 21IG200-227- 2" 22' OPENING 7' High 21IG200-228- 2" 22' OPENING 8' High 21IG200-266- 2" 26' OPENING 7' High 21IG200-267- 2" 26' OPENING 8' High 21IG200-306- 2" 26' OPENING 6' High 21IG200-306- 2" 30' OPENING 6' High 21IG200-307- 2" 30' OPENING 7' High	21IG200-127-	2″	12' OPENING	7' High	
21IG200-147- 2" 14' OPENING 7' High 21IG200-148- 2" 14' OPENING 8' High 21IG200-166- 2" 16' OPENING 6' High 21IG200-167- 2" 16' OPENING 7' High 21IG200-186- 2" 18' OPENING 6' High 21IG200-187- 2" 18' OPENING 7' High 21IG200-188- 2" 18' OPENING 8' High 21IG200-226- 2" 22' OPENING 6' High 21IG200-227- 2" 22' OPENING 7' High 21IG200-228- 2" 22' OPENING 8' High 21IG200-266- 2" 26' OPENING 7' High 21IG200-267- 2" 26' OPENING 8' High 21IG200-306- 2" 26' OPENING 8' High 21IG200-306- 2" 30' OPENING 6' High 21IG200-307- 2" 30' OPENING 7' High	21IG200-128-	2″	12' OPENING	8' High	
21IG200-148- 2" 14' OPENING 8' High 21IG200-166- 2" 16' OPENING 6' High 21IG200-167- 2" 16' OPENING 7' High 21IG200-186- 2" 18' OPENING 6' High 21IG200-187- 2" 18' OPENING 7' High 21IG200-188- 2" 18' OPENING 8' High 21IG200-226- 2" 22' OPENING 6' High 21IG200-227- 2" 22' OPENING 7' High 21IG200-228- 2" 22' OPENING 8' High 21IG200-266- 2" 26' OPENING 7' High 21IG200-267- 2" 26' OPENING 7' High 21IG200-306- 2" 26' OPENING 8' High 21IG200-306- 2" 30' OPENING 6' High 21IG200-307- 2" 30' OPENING 7' High	21IG200-146-	2″	14' OPENING	6' High	
21IG200-166- 2" 16' OPENING 6' High 21IG200-167- 2" 16' OPENING 7' High 21IG200-186- 2" 18' OPENING 6' High 21IG200-187- 2" 18' OPENING 7' High 21IG200-188- 2" 18' OPENING 8' High 21IG200-226- 2" 22' OPENING 6' High 21IG200-227- 2" 22' OPENING 7' High 21IG200-228- 2" 22' OPENING 8' High 21IG200-266- 2" 26' OPENING 6' High 21IG200-267- 2" 26' OPENING 7' High 21IG200-306- 2" 26' OPENING 8' High 21IG200-306- 2" 30' OPENING 6' High 21IG200-307- 2" 30' OPENING 7' High	21IG200-147-	2″	14' OPENING	7' High	
21IG200-167- 2" 16' OPENING 7' High 21IG200-186- 2" 18' OPENING 6' High 21IG200-187- 2" 18' OPENING 7' High 21IG200-188- 2" 18' OPENING 8' High 21IG200-226- 2" 22' OPENING 6' High 21IG200-227- 2" 22' OPENING 7' High 21IG200-228- 2" 22' OPENING 8' High 21IG200-266- 2" 26' OPENING 6' High 21IG200-267- 2" 26' OPENING 7' High 21IG200-268- 2" 26' OPENING 8' High 21IG200-306- 2" 30' OPENING 6' High 21IG200-307- 2" 30' OPENING 7' High	21IG200-148-	2"	14' OPENING	8' High	
21IG200-167- 2" 16' OPENING 7' High 21IG200-186- 2" 18' OPENING 6' High 21IG200-187- 2" 18' OPENING 7' High 21IG200-188- 2" 18' OPENING 8' High 21IG200-226- 2" 22' OPENING 6' High 21IG200-227- 2" 22' OPENING 7' High 21IG200-228- 2" 22' OPENING 8' High 21IG200-266- 2" 26' OPENING 6' High 21IG200-267- 2" 26' OPENING 7' High 21IG200-268- 2" 26' OPENING 8' High 21IG200-306- 2" 30' OPENING 6' High 21IG200-307- 2" 30' OPENING 7' High	21IG200-166-	2"	16' OPENING	6' High	
21IG200-186- 2" 18' OPENING 6' High 21IG200-187- 2" 18' OPENING 7' High 21IG200-188- 2" 18' OPENING 8' High 21IG200-226- 2" 22' OPENING 6' High 21IG200-227- 2" 22' OPENING 7' High 21IG200-228- 2" 22' OPENING 8' High 21IG200-266- 2" 26' OPENING 6' High 21IG200-267- 2" 26' OPENING 7' High 21IG200-268- 2" 26' OPENING 8' High 21IG200-306- 2" 30' OPENING 6' High 21IG200-307- 2" 30' OPENING 7' High	21IG200-167-	2"			
21IG200-187- 2" 18' OPENING 7' High 21IG200-188- 2" 18' OPENING 8' High 21IG200-226- 2" 22' OPENING 6' High 21IG200-227- 2" 22' OPENING 7' High 21IG200-228- 2" 22' OPENING 8' High 21IG200-266- 2" 26' OPENING 6' High 21IG200-267- 2" 26' OPENING 7' High 21IG200-268- 2" 26' OPENING 8' High 21IG200-306- 2" 30' OPENING 6' High 21IG200-307- 2" 30' OPENING 7' High	21IG200-186-	2"	18' OPENING		
21IG200-188- 2" 18' OPENING 8' High 21IG200-226- 2" 22' OPENING 6' High 21IG200-227- 2" 22' OPENING 7' High 21IG200-228- 2" 22' OPENING 8' High 21IG200-266- 2" 26' OPENING 6' High 21IG200-267- 2" 26' OPENING 7' High 21IG200-268- 2" 26' OPENING 8' High 21IG200-306- 2" 30' OPENING 6' High 21IG200-307- 2" 30' OPENING 7' High		2"			
21IG200-226- 2" 22' OPENING 6' High 21IG200-227- 2" 22' OPENING 7' High 21IG200-228- 2" 22' OPENING 8' High 21IG200-266- 2" 26' OPENING 6' High 21IG200-267- 2" 26' OPENING 7' High 21IG200-268- 2" 26' OPENING 8' High 21IG200-306- 2" 30' OPENING 6' High 21IG200-307- 2" 30' OPENING 7' High		2"			
21IG200-227- 2" 22' OPENING 7' High 21IG200-228- 2" 22' OPENING 8' High 21IG200-266- 2" 26' OPENING 6' High 21IG200-267- 2" 26' OPENING 7' High 21IG200-268- 2" 26' OPENING 8' High 21IG200-306- 2" 30' OPENING 6' High 21IG200-307- 2" 30' OPENING 7' High		2"			
21IG200-228- 2" 22' OPENING 8' High 21IG200-266- 2" 26' OPENING 6' High 21IG200-267- 2" 26' OPENING 7' High 21IG200-268- 2" 26' OPENING 8' High 21IG200-306- 2" 30' OPENING 6' High 21IG200-307- 2" 30' OPENING 7' High					
21IG200-266- 2" 26' OPENING 6' High 21IG200-267- 2" 26' OPENING 7' High 21IG200-268- 2" 26' OPENING 8' High 21IG200-306- 2" 30' OPENING 6' High 21IG200-307- 2" 30' OPENING 7' High		2"			
21IG200-267- 2" 26' OPENING 7' High 21IG200-268- 2" 26' OPENING 8' High 21IG200-306- 2" 30' OPENING 6' High 21IG200-307- 2" 30' OPENING 7' High					
21IG200-268- 2" 26' OPENING 8' High 21IG200-306- 2" 30' OPENING 6' High 21IG200-307- 2" 30' OPENING 7' High					
21IG200-306- 2" 30' OPENING 6' High 21IG200-307- 2" 30' OPENING 7' High					
21IG200-307- 2" 30' OPENING 7' High					-
	21IG200-308-		30' OPENING	8' High	



FRAME CONFIGURATIONS

Up to 10' Wide (Price Includes 2 leafs)



12' to 24' Wide (Price Includes 2 leafs)



26' to 30' Wide (Price Includes 2 leafs) ("K" Brace Recommended)



SWING GATE Recommended Post Sizes					
	MAXIMUM SINGLE	MAXIMUM DOUBLE			
3" O.D.	6'	12'			
4" 0.D.	13'	26'			
6-5/8" O.D.	18'	36'			
8-5/8" O.D.	18' UP	36' UP			




COMMERCIAL GALVANIZED CHAIN LINK FABRIC FENCE



GALVANIZED CHAIN LINK FABRIC

Including 2" Mesh x 9-Gauge Galv. Fabric, 2" Mesh x 6-Gauge Galv. Fabric, and 2-3/8" Mesh x 12.5-Gauge Galv. Fabric

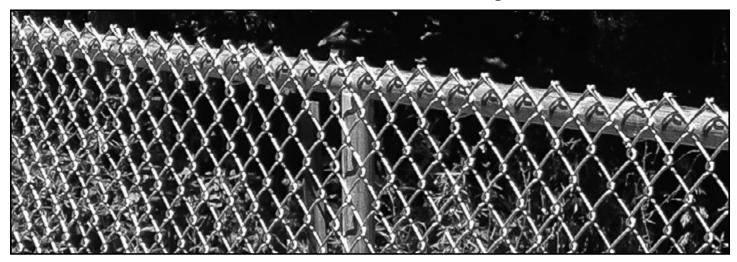

2" MESH HOT-DIP GALVANIZED CHAIN LINK FABRIC

1.2 OZ | MEETS FEDERAL SPECIFICATIONS RRF-191/1B, TYPE 1, CLASS 1, AND ASTM A392, CLASS 1

Item No.	Description	Height	Price/Ft. < 1000 Ft.	Price/Ft. > 1000 Ft.
3G29	2" Mesh x 9-Gauge Galv. Fabric	3′		
42G29	2" Mesh x 9-Gauge Galv. Fabric	42"		
4G29	2" Mesh x 9-Gauge Galv. Fabric	4′		
5G29	2" Mesh x 9-Gauge Galv. Fabric	5′		
6G29	2" Mesh x 9-Gauge Galv. Fabric	6′		
7G29	2" Mesh x 9-Gauge Galv. Fabric	7′		
8G29	2" Mesh x 9-Gauge Galv. Fabric	8′		
10G29	2" Mesh x 9-Gauge Galv. Fabric	10′		
12G29	2" Mesh x 9-Gauge Galv. Fabric	12′		
6G26	2" Mesh x 6-Gauge Galv. Fabric	6′		
8G26	2" Mesh x 6-Gauge Galv. Fabric	8′		
10G26	2" Mesh x 6-Gauge Galv. Fabric	10′		
12G26	2" Mesh x 6-Gauge Galv. Fabric	12′		

NOTE: 2.0 oz. coating to meet RRF-191/1B, Type1, Class2, or ASTM A392, Class 2, is also available. Price upon request.

	2-3/8" MESH HOT-DIP GALVANIZED CHAIN LINK FABRIC							
Item No.	Description	Height	Price/Ft. < 1000 Ft.	Price/Ft. > 1000 Ft.				
4G23812	2-3/8" Mesh x 12.5-Gauge Galv. Fabric	4′						
5G23812	2-3/8" Mesh x 12.5-Gauge Galv. Fabric	5′						
6G23812	2-3/8" Mesh x 12.5-Gauge Galv. Fabric	6′						
8G23812	2-3/8" Mesh x 12.5-Gauge Galv. Fabric	8′						

Eastern Chain Link 04/24/23

1.800.339.3362 • www.easternfence.com

Page B-25

GALVANIZED RESI WEIGHT PIPE



TRIPLE COATED - FOR BETTER CORROSION RESISTANCE!

	MILL LENGTHS								
Item#	Nominal O.D.	Wall	Length	Loose Ea.	Per Ea. Bundle	Per Ea. 5 Bundles			
R1321	1-3/8" x 21' Resi Weight Pipe SWG	.055	21'SW						
R1324	1-3/8" x 24' Resi Weight Pipe	.055	24′						
R1524	1-5/8" x 24' Resi Weight Pipe	.055	24′						

It II	CUT POSTS (All prices are "per each")								
Item #	Nominal O.D.	Wall	Length	Loose Ea.	Per Ea. Bundle	Per Ea. 5 Bundles			
R1506	1-5/8" x 6' Resi Weight Pipe	.055	6′						
R1507	1-5/8" x 7' Resi Weight Pipe	.055	7′						
R1521/24	ALL OTHER 1-5/8" CUTS AT \$P	ER FT.							

SIZE • WEIGHT • BUNDLE DATA

Nominal O.D.	Wall	Lbs./Ft.	Pcs./Bndl.
1-3/8"	.055	.770	91
1-5/8"	.055	.943	61

PROUDLY "MADE IN THE USA"
ALL OTHER SIZES & GAUGES AVAILABLE UPON REQUEST

SS-15 GALVANIZED PIPE



Proudly "Made In the USA" EQUAL IN PERFORMANCE TO 1.80 oz. GALVANIZED

EQUAL IN PERFORMANCE TO 1.80 oz. GALVANIZED Performance proven protection - Both inside and outside

	MILL LENGTHS							
Item#	Nominal O.D.	Wall	Length	Loose Ea.	Per Ea. Bundle	Per Ea. 5 Bundles		
15-1321	1-3/8" x 21' Resi Weight Pipe SWG	.065	21′SW					
15-1521	1-5/8" x 21' Resi Weight Pipe	.065	21′					
15-1524	1-5/8" x 24' Resi Weight Pipe	.065	24′					
15-221	2" x 21' Resi Weight Pipe	.065	5′					
15-224	2" x 24' Resi Weight Pipe	.065	6′					
15-2521	2-1/2" x 21' Resi Weight Pipe	.065	8′					
15-2524	2-1/2" x 24' Resi Wei ght Pipe	.065	10′					

	CUT POSTS (All prices are "per each")							
Item#	Nominal O.D.		Wall	Length	Loose Ea.	Per Ea. Bundle	Per Ea. 5 Bundles	
15-1506	1-5/8" x 6' SS-15 Pipe		.065	6′				
15-1507	1-5/8" x 7' SS-15 Pipe		.065	7′				
15-1521/24	ALL OTHER 1-5/8" CUTS AT \$	PER FT.						
15-206	2" x 6' SS-15 Pipe		.065	6′				
15-207	2" x 7' SS-15 Pipe		.065	7′				
15-208	2" x 8' SS-15 Pipe		.065	8′				
15-221/24	ALL OTHER 2" CUTS AT \$	PER FT.						
15-2506	2-1/2" x 6' SS-15 Pipe		.065	6′				
15-2507	2-1/2" x 7' SS-15 Pipe		.065	7′				
15-2508	2-1/2" x 8' SS-15 Pipe		.065	8′				
15/2521/24	ALL OTHER 2-1/2" CUTS AT \$	PER FT.						

SIZE • WEIGHT • BUNDLE DATA

Nominal O.D.	Wall	Lbs./Ft.	Pcs./Bndl.
1-3/8"	.065	0.87	91
1-5/8"	.065	1.11	61
2"	.065	1.27	61
2-1/2"	.065	1.60	37

OUTPERFORMS LITE STRUCTURAL PIPE IN ALL PERFORMANCE AREAS

SS-20 GALVANIZED PIPE



Outperforms Structural Pipe

	MILL LENGTHS						
Item#	Nominal O.D.	Wall	Length	Loose Ea.	Per Ea. Bundle	Per Ea. 5 Bundles	
20-1321	1-3/8" x 21' SS-20 Pipe	.080.	21′				
20-1521	1-5/8" x 21' SS-20 Pipe	.085	21′SW				
20-1524	1-5/8" x 24' SS-20 Pipe	.085	24′				
20-221	2" x 21' SS-20 Pipe	.090	21′				
20-224	2" x 24' SS-20 Pipe	.090	24′				
20-2521	2-1/2" x 21' SS-20 Pipe	.095	21′				
20-2524	2-1/2" x 24' SS-20 Pipe	.095	24′				
20-321	3" x 21' SS-20 Pipe	.110	21′				
20-324	3" x 24' SS-20 Pipe	.110	24′				

	CUT P	OSTS (All pi	rices ar	e "per ea	ach")		
Item#	Nominal O.D.		Wall	Length	Loose Ea.	Per Ea. Bundle	Per Ea. 5 Bundles
20-1506	1-5/8" x 6' SS-20 Pipe		.085	6′			
20-1507	1-5/8" x 7' SS-20 Pipe		.085	7′			
20-1508	1-5/8" x 8' SS-20 Pipe		.085	8′			
20-1521/24	ALL OTHER 1-5/8" CUTS AT \$	PER FT.					
20-206	2" x 6' SS-20 Pipe		.090	6′			
20-207	2" x 7' SS-20 Pipe		.090	7′			
20-208	2" x 8' SS-20 Pipe		.090	8′			
20-221/24	ALL OTHER 2" CUTS AT \$	PER FT.					
20-2506	2-1/2" x 6' SS-20 Pipe		.095	6′			
20-2507	2-1/2" x 7' SS-20 Pipe		.095	7′			
20-2508	2-1/2" x 8' SS-20 Pipe		.095	8′			
20-2521/24	ALL OTHER 2-1/2" CUTS AT \$	PER FT.					
20-321/24	ALL OTHER 3" CUTS AT \$	PER FT.	.110				

SIZE • WEIGHT • BUNDLE DATA

Nominal O.D.	Wall	Lbs./Ft.	Pcs./Bndl.
1-3/8"	.080	1.056	91
1-5/8"	.085	1.431	61
2"	.090	1.741	61
2-1/2"	.095	2.315	37
3"	.110	3.251	30

OUTPERFORMS LITE STRUCTURAL PIPE IN ALL PERFORMANCE AREAS

SS-40 GALVANIZED PIPE



Outperforms Schedule 40 Pipe! Conforms to FEDERAL SPECIFICATION RRF-191/3C, CLASS 1, GRADE B

		MILL LENG	THS			
Item#	Nominal O.D.	Wall	Length	Loose Ea.	Per Ea. Bundle	Per Ea. 5 Bundles
40-1321	1-3/8" x 21'SS-40 Pipe	.104	21′			
40-1521	1-5/8" x 21' SS-40 Pipe	.111	21'			
40-1524	1-5/8" x 24' SS-40 Pipe	.111	24'			
40-218	2" x 18' SS-40 Pipe	.120	18′			
40-221	2" x 21' SS-40 Pipe	.120	21'			
40-224	2"x 24' SS-40 Pipe	.120	24'			
40-2518	2-1/2" x 18' SS-40 Pipe	.130	18′			
40-2521	2-1/2" x 21' SS-40 Pipe	.130	21′			
40-2524	2-1/2" x 24' SS-40 Pipe	.130	24'			
40-321	3"x 21' SS-40 Pipe	.160	21'			
40-324	3"x 24' SS-40 Pipe	.160	24'			
40-3521	3-1/2" x 21' SS-40 Pipe	.160	21′			
40-3524	3-1/2" x 24' SS-40 Pipe	.160	24′			
40-421	4" x 21' SS-40 Pipe	.160	21'	<u>-</u>	·	
40-424	4" x 24' SS-40 Pipe	.160	24′			

	CUT	POSTS (AII	prices a	re"per e	each")		
Item#	Nominal O.D.		Wall	Length	Loose Ea.	Per Ea. Bundle	Per Ea. 5 Bundles
40-1506	1-5/8" x 6' SS-40 Pipe		.111	6′			
40-1507	1-5/8" x 7' SS-40 Pipe		.111	7′			
40-1508	1-5/8" x 8' SS-40 Pipe		.111	8′			
40-1521/24	ALL OTHER 1-5/8" CUTS AT \$	PER FT.					
40-206	2" x 6' SS-40 Pipe		.120	6′			
40-207	2" x 7' SS-40 Pipe		.120	7′			
40-208	2" x 8' SS-40 Pipe		.120	8′			
40-221-24	ALL OTHER 2" CUTS AT \$	PER FT.					
40-2506	2-1/2" x 6' SS-40 Pipe	<u> </u>	.130	6′	<u> </u>		
40-2507	2-1/2" x 7' SS-40 Pipe		.130	7"			
40-2508	2-1/2" x 8' SS-40 Pipe		.130	8′			
40-2509	2-1/2" x 9' SS-40 Pipe		.130	9′			
40-2521/24	ALL OTHER 2-1/2" CUTS AT \$	PER FT.					
40-324/24	ALL OTHER 3" CUTS AT \$	PER FT.	.160				
40-3521/24	ALL OTHER 3-1/2" CUTS AT \$	PER FT.	.160		·		
40-421/24	ALL OTHER 4" CUTS AT \$	_ PER FT.	.160				

SIZE • WEIGHT • BUNDLE DATA

Nominal O.D.	Wall	Lbs./Ft.	Pcs./Bndl.
1-3/8"	.104	1.345	91
1-5/8"	.111	1.863	61
2"	.120	2.281	61
2-1/2"	.130	3.117	37
3"	.160	4.640	30
3-1/2"	.160	5.706	19
4"	.160	6.560	19

SCHEDULE 40 GALVANIZED PIPE



1.8 OZ. PER SQ. FT. ZINC COATING CONFORMS TO FEDERAL SPECIFICATION RRF-191/3C CLASS 1, GRADE A, AND ASTM F1083

	MILL LENGTHS								
Item#	Nominal O.D.	Wall	Length	No. Per Bundle	Loose Ea.	Per Ea. Bundle	Per Ea. 5 Bundles		
STD1521	1-5/8" x 21' Standard Weight Pipe	.145	21'	42					
STD1524	1-5/8" x 24' Standard Weight Pipe	.145	24'	42					
STD221	2" x 21' Standard Weight Pipe	.145	21'	36					
STD224	2" x 24' Standard Weight Pipe	.145	24'	36					
STD2521	2-1/2" x 21' Standard Weight Pipe	.154	21'	26					
STD2524	2-1/2" x 24' Standard Weight Pipe	.154	24'	26					
STD321	3" x 21' Standard Weight Pipe	.203	21'	18					
STD324	3" x 24' Standard Weight Pipe	.203	24'	18					
STD421	4" x 21'Standard Weight Pipe	.226	21'	12					
STD424	4" x 24' Standard Weight Pipe	.226	24'	12					
STD621	6-5/8" x 21' Standard Weight Pipe	.280	21'	7					
STD624	6-5/8" x 24' Standard Weight Pipe	.280	24'	7					
STD821/24	8-5/8" x 21'/24' Standard Weight Pipe	.322	21'/24'	3					

SIZE • WEIGHT • BUNDLE DATA

Nominal O.D.	Wall	Lbs./Ft.
1-5/8"	.140	2.27
2"	.145	2.72
2-1/2	.154	3.65
3"	.203	5.79
3-1/2"	.216	7.58
4"	.226	9.11
6-5/8"	.280	18.97
8-5/8"	.322	28.55


SCHEDULE 40 GALVANIZED PIPE



1.8 OZ. PER SQ. FT. ZINC COATING CONFORMS TO FEDERAL SPECIFICATION RRF-191/3C CLASS 1, GRADE A, AND ASTM F1083

CUT SIZES									
Item#	Nominal O.D.	Wall	Length	No. Per Bundle	Loose Ea.	Per Ea. Bundle	Per Ea. 5 Bundles		
STD208	2" x 8' Standard Weight Pipe	.145	8′	36					
STD209	2″ x 9' Standard Weight Pipe	.145	9′	36					
STD2508	2-1/2" x 8' Standard Weight Pipe	.154	8′	26					
STD2509	2-1/2" x 9' Standard Weight Pipe	.154	9′	26					
STD25106	2-1/2" x 10'-6" Standard Weight Pipe	.154	10′6″	26					
STD2512	2-1/2" x 12' Standard Weight Pipe	.154	12′	26					

PIPE BENDING AND FLANGE WELDING NOW AVAILABLE!







		A 1 11A	UNIUM B	OCT CADC	
. "	B			OST CAPS	
ltem#	Description	Case Qty.	Loose	Case	
APC138*	1-3/8" Aluminum Post Cap	350			
APC158*	1-5/8" Aluminum Post Cap	350			
APC200*	2" Aluminum Post Cap	250			
APC250*	2-1/2" Aluminum Post Cap	150			
APC300*	3" Aluminum Post Cap	100			
		GALVA	ANIZED P	OST CAPS	
ltem#	Description	Case Qty.	Loose	Case	
GPC158*	1-5/8" Galvanized Post Caps	100			

		GALVA	MIZED P	USI CAPS
Item#	Description	Case Qty.	Loose	Case
GPC158*	1-5/8" Galvanized Post Caps	100		
GPC200*	2" Galvanized Post Caps	75		
GPC250*	2-1/2" Galvanized Post Caps	50		
GPC300*	3" Galvanized Post Caps	50		
GPC350*	3-1/2" Galvanized Post Caps	25		
GPC400*	4" Galvanized Post Caps	25		
GPC658*	6-5/8" Galvanized Post Caps	10		
GPC858*	8-5/8" Galvanized Post Caps	8		



ALUMINUM DOME CAP						
Item#	Description	Case Qty.	Loose	Case		

ADC138 * 1-3/8" Aluminum Dome Cap 350



	ALUMINUM PLUGS								
Item#	Description	Case Qty.	Loose	Case					
AP158*	1-5/8" Aluminum Plug	250							
AP200*	2″ Aluminum Plug	250							

* = COMBINE 10 CASES OF ANY SYSTEM 21 OR GALV. CHAIN LINK FITTINGS WITH AN ASTERISK FOR A 20% DISCOUNT



la #	Donat at a	ALUMINUM LINE 1	
Item# ALT153*	Description 1-5/8" x 1-3/8" Aluminum Line Top	Case Qty. Loose	Case
ALT213*	2" x 1-3/8" Aluminum Line Top	200	
ALT215*	2" x 1-5/8" Aluminum Line Top	100	
ALT255*	2-1/2" x 1-5/8" Aluminum Line Top	100	
		GALVANIZED LINE	TOPS
ltem#	Description	Case Qty. Loose	Case
GLT215*	2" x 1-5/8" Galvanized Line Top	50	
GLT255*	2-1/2" x 1-5/8" Galvanized Line Top	30	
GLT315*	3" x 1-5/8" Galvanized Line Top	20	
GLT355*	3-1/2" x 1-5/8" Galvanized Line Top	20	
GLT415*	4" x 1-5/8" Galvanized Line Top	30	
		PRESSED STEEL LINI	E TOPS
Item#	Description	Case Qty. Loose	Case
PLT153*	1-5/8" x 1-3/8" Pressed Steel Line Tops	CALL	
PLT213*	2" x 1-3/8" Pressed Steel Line Tops	50	
PLT215*	2" x 1-5/8" Pressed Steel Line Tops	50	
PLT255*	2-1/2" x 1-5/8" Pressed Steel Line Tops	50	
PLT315	3" x 1-5/8" Pressed Steel Line Tops	20	
PLT355	3-1/2" x 1 5/8" Pressed Steel Line Tops	CALL	
PLT415	4" x 1-5/8" Pressed Steel Line Tops	CALL	
		GALVANIZED SLEE	EVES
Item#	Description	Case Qty. Loose	Case
GSL138*	1-3/8" Galvanized Sleeve	100	

* = COMBINE 10 CASES OF ANY SYSTEM 21 OR GALV. CHAIN LINK FITTINGS WITH AN ASTERISK FOR A 20% DISCOUNT

100

Eastern Chain Link 04/24/23

1-5/8" Galvanized Sleeve

1.800.339.3362 • www.easternfence.com

Page B-33

GSL158*



TENSION BANDS - STANDARD						
ltem#	Description	Case Qty.	Loose	Case		
PTB138*	1-3/8" Plain Tension Band	250				
PTB158*	1-5/8" Plain Tension Band	250				
PTB200*	2" Plain Tension Band	250				
PTB250*	2-1/2" Plain Tension Band	250				
PTB300*	3" Plain Tension Band	100				
		TENCIA	M D A NIDO	DEVEL	ED	

		TENSIO	N BANDS	S - BEVEL	
Item#	Description	Case Qty.	Loose	Case	
BTB138*	1-3/8" Beveled Tension Band	250			
BTB158*	1-5/8" Beveled Tension Band	250			
BTB200*	2" Beveled Tension Band	250			
BTB250*	2-1/2" Beveled Tension Band	250			
BTB300*	3" Beveled Tension Band	100			
BTB350*	3-1/2" Beveled Tension Band	100			
BTB400*	4" Beveled Tension Band	100			
BTB658*	6-5/8" Beveled Tension Band	50	·		
BTB858*	8-5/8" Beveled Tension Band	50			



		BRACE E	<u> Bands -</u>	<u>Standar</u>
Item#	Description	Case Qty.	Loose	Case
PBB158*	1-5/8" Plain Brace Band	250		
PBB200*	2" Plain Brace Band	250		
PBB250*	2-1/2" Plain Brace Band	250		
PBB300*	3" Plain Brace Band	100		



		BRACE	BANDS -	- BEVELE	Ð
Item#	Description	Case Qty.	Loose	Case	
BBB138*	1-3/8" Beveled Brace Band	300			_
BBB158*	1-5/8" Beveled Brace Band	300			
BBB200*	2" Beveled Brace Band	250			
BBB250*	2-1/2" Beveled Brace Band	250			
BBB300*	3" Beveled Brace Band	200			-
BBB350*	3-1/2" Beveled Brace Band	100			
BBB400*	4" Beveled Brace Band	100			_
BBB658*	6-5/8" Beveled Brace Band	50			-
BBB858*	8-5/8" Beveled Brace Band	50			-



* = COMBINE 10 CASES OF ANY SYSTEM 21 OR GALV. CHAIN LINK FITTINGS WITH AN ASTERISK FOR A 20% DISCOUNT



	BOULEVA	ARD CLAMPS	– (Bolts	Sold Sep	erately)
Item#	Description	Bolt Required	Case Qty.	Loose	Case
BVD138*	1-3/8" x 1-3/8" Boulevard Clamps	5/16" x 2"	150		
BVD153*	1-5/8" x 1-3/8" Boulevard Clamps	5/16" x 2"	100		
BVD158*	1-5/8" x 1-5/8" Boulevard Clamps	5/16" x 2"	100		
BVD200*	2" x 2" Boulevard Clamps	5/16" x 2-1/2"	100		
BVD213*	2" x 1-3/8" Boulevard Clamps	5/16" x 2-1/2"	125		
BVD215*	2" x 1-5/8" Boulevard Clamps	5/16" x 2-1/2"	50		
BVD255*	2-1/2" x 1-5/8" Boulevard Clamps	3/8" x 2-1/2"	50		
BVD315*	3" x 1-5/8" Boulevard Clamps	3/8" x 2-1/2"	50	-	
BVD355*	3-1/2" x 1-5/8" Boulevard Clamps	3/8" x 2-1/2"	50		
BVD415*	4" x 1-5/8" Boulevard Clamps	3/8" x 2-1/2"	50		



		END CLAMPS —	(Bolts Sold	Sepera	tely)
ltem#	Description	Bolt Required	Case Qty.	Loose	Case
EC138*	End Clamps 1-3/8" x 1-3/8"	5/16" x 2"	100		
EC158*	End Clamps 1-5/8" x 1-5/8"	3/8" x 2-1/2"	100		
EC213*	End Clamps 2" x 1-3/8"	5/16" x 2"	100		
EC215*	End Clamps 2" x 1-5/8"	3/8" x 2-1/2"	100		
EC200*	End Clamps 2" x 2"	5/16" x 2-1/2"	100		
EC255*	End Clamps 2-1/2" x 1-5/8"	3/8" x2-1/2"	100		
EC315*	End Clamps 3" x 1-5/8"	3/8" x 2-1/2"	100		
EC355*	End Clamps 3-1/2" x 1-5/8"	3/8" x 2-1/2"	50		
EC415*	End Clamps 4" x 1-5/8"	3/8" x 2-1/2"	100		



CORNER RAIL CLAMP — (Bolts Sold Seperately)							
Item#	Description	Bolt Required	Case Qty.	Loose	Case		
CRC255*	Corner Rail Clamp 2-1/2" x 1-5/8"	5/16" x 2-1/2"	100				
CRC315*	Corner Rail Clamp 3" x 1-5/8"	5/16" x 2-1/2"	100				



SADDLE CLAMP — (Bolts Sold Seperately)							
Item#	Description	Bolt Required	Case Qty.	Loose	Case		
SC138*	Saddle Clamp 1-3/8" x 1-3/8"	5/16" x 1-1/4"	100				
SC158*	Saddle Clamp 1-5/8" x 1-5/8"	3/8" x 2-1/2"	100			0-3	
SC200*	Saddle Clamp 2" x 2"	3/8" x 3"	100				

* = COMBINE 10 CASES OF ANY SYSTEM 21 OR GALV. CHAIN LINK FITTINGS WITH AN ASTERISK FOR A 20% DISCOUNT

Eastern Chain Link 04/24/23

1.800.339.3362 • www.easternfence.com

Page B-35



ALUMINUM RAIL ENDS							
Item#	Description	Case Qty.	Loose	Case			
ARE138*	1-3/8" Aluminum Rail End	500					
ARE158*	1-5/8" Aluminum Rail End	250					

GALVANIZED RAIL ENDS						
item#	Description	Case Qty.	Loose	Case		
GRE138*	1-3/8" Galvanized Rail End	100				4
BRE158*	1-5/8" Galvanized Brace Rail End	100			C.	
GRE200*	2" Galvanized Rail End	50				

		CARRIAG	E BOLTS		
Item#	Description	Case Qty.	Loose	Case	
NB5125*	5/16" x 1-1/4" Carriage Nuts and Bolts	20			_
NB5150*	5/16" x 1-1/2" Carriage Nuts and Bolts	10			
NB5250*	5/16″ x 2-1/2″ Carriage Nuts and Bolts	10			
NB3150*	3/8" x 1-1/2" Carriage Nuts and Bolts	10			15 S
NB3200*	3/8" x 2" Carriage Nuts and Bolts	10			
NB3250*	3/8" x 2-1/2" Carriage Nuts and Bolts	10			
NB3300*	3/8" x 3" Carriage Nuts and Bolts	10			33 3 3 3 3 3 3 3 3 3 3 3 3 3 3 3 3 3 3
NB3350*	3/8" x 3-1/2" Carriage Nuts and Bolts	10			

* = COMBINE 10 CASES OF ANY SYSTEM 21 OR GALV. CHAIN LINK FITTINGS WITH AN ASTERISK FOR A 20% DISCOUNT

Eastern Chain Link 04/24/23

1.800.339.3362 • www.easternfence.com

Page B-36



	ALUMINUM	FENCE TIES -	– 100 T	ies Per Bag
Item No.	Description	BAGS PER CASE	PER BAG	PER BAG BY CASE T/L
AFT9S*	9-Gauge x 6-1/2"#13 Aluminum Fence Ties	37		
AFT9L*	9-Gauge x 8-1/4" #16 Aluminum Fence Ties	31		
AFT6S*	6-Gauge x 6-1/2" #23 Aluminum Fence Ties	18		
AFT6L*	6-Gauge x 8-1/4 #26 Aluminum Fence Ties	18		

STEEL FENCE TIES, GALV 100 Ties Per Bag									
Item No.	Description	BAGS PER CASE	PER BAG	PER BAG BY CASE	T/L				
SFT9L*	9-Gauge x 8-1/4" Steel Fence Ties	10							
SFT9S	9-Gauge SHORT x 6-1/2" Steel Fence Ties	10							
SFT13*	13-Gauge x 15-1/2" Double Wrap Steel Fence Ties	20							
SFT14*	14-Gauge x 12" Double Loop Steel Fence Ties	25							



STAINLESS STEEL DOUBLE TIES

Item No. Description BAGS PER CASE PER BAG PER BAG BY CASE T/L

RRTIESS* 18-Gauge x 8" Double Tie Stainless Steel 50

	FABRIC AND	CHORS - GALVANIZED STEEL
--	-------------------	--------------------------

Item No. Description STD. PKG. QTY PER 100 STD. PACKAGE T/L

FAH* Galvanized Fabric Anchors 250



* = COMBINE 10 CASES OF ANY SYSTEM 21 OR GALV. CHAIN LINK FITTINGS WITH AN ASTERISK FOR A 20% DISCOUNT

Eastern Chain Link 04/24/23

1.800.339.3362 • www.easternfence.com



	POST HINGES - MALLEABLE										
Item#	Description	Case Qty.	Loose	Case	T/L						
MPH200*	Post Hinge - Malleable 2"	50				- Cla					
MPH250*	Post Hinge - Malleable 2-1/2"	50									
MPH300*	Post Hinge - Malleable 3"	50									

	POST HINGES - PRESSED STEEL									
Item#	Description	Case Qty.	Loose	Case	T/L					
PPH200*	2" Post Hinge - Pressed Steel	50				п				
PPH250*	2-1/2" Post Hinge - Pressed Steel	50								
PPH300*	3" Post Hinge - Pressed Steel	50								
						I				

	FRAME HINGE - MALLEABLE										
Item#	Description	Case Qty.	Loose	Case	T/L						
MFH138*	1-3/8" Frame Hinge - Malleable	100									
MFH158*	1-5/8" Frame Hinge - Malleable	80									

100

	FRAME HINGE - PRESSED STEEL									
Item#	Description	Case Qty.	Loose	Case	T/L					
PFH138*	1-3/8" Frame Hinge - Pressed Steel	100								
PFH158*	1-5/8" Frame Hinge - Pressed Steel	80				20				

* = COMBINE 10 CASES OF ANY SYSTEM 21 OR GALV. CHAIN LINK FITTINGS WITH AN ASTERISK FOR A 20% DISCOUNT

WMH*

Post Hinge - Wall Mount Pin



		OARLOCKS -	COMPLETE		
Item No.	Description	CASE QTY	Loose	PER 100	
0AR138*	1-3/8" x 1-3/8" Oarlocks - Complete	100			_
0AR213*	2 x 1-3/8" Oarlocks - Complete	100			
0AR253*	2-1/2" x 1-3/8" Oarlocks - Complete	100			
0AR313*	3" x 1-3/8" Oarlocks - Complete	100			
0AR215*	2" x 1-5/8" Oarlocks - Complete	100			FIFE
0AR255*	2-1/2" x 1-5/8" Oarlocks - Complete	100			H H
0AR315*	3" x 1-5/8" Oarlocks - Complete	100			-
OAR402*	4" x 2" Oarlocks - Complete	100			_
		FORK	ONLY		
Item No.	Description	CASE QTY	Loose	PER 100	
FORK138*	1-3/8" Fork Only	100			
FORK200*	2" Fork Only	100			
FORK250*	2-1/2" Fork Only	50			
FORK300*	3" Fork Only	50			1
FORK400*	4" Fork Only	50			
		COLLAR	S ONLY		
Item No.	Description	CASE QTY	Loose	PER 100	
COL138*	1-3/8" Collar Only	100			E Common
COL158*	1-5/8" Collar Only	100			B
COL200*	2" Collar Only	100			
		DROP FORK	RRACKETS		
Item No.	Description	CASE QTY	EACH LOOSE	PER 100	



* = COMBINE 10 CASES OF ANY SYSTEM 21 OR GALV. CHAIN LINK FITTINGS WITH AN ASTERISK FOR A 20% DISCOUNT

100

Eastern Chain Link 04/24/23

Drop Fork Bracket

1.800.339.3362 • www.easternfence.com

Page B-39

DFB*



	AUTO LATCH - CHILD PROOF LATCH (Other Sizes Available)									
Item No.	Description	CASE QTY	LOOSE	25 EACH						
AUT0138	1-3/8" x 1-3/8" Auto Latch - Child Proof	25								
AUT0213	2" x 1-3/8" Auto Latch - Child Proof	25								
AUT0215	2" x 1-5/8" Auto Latch - Child Proof	25								
AUT0253	2-1/2" x 1-3/8" Auto Latch - Child Proof	25			10					
AUT0255	2-1/2" x 1-5/8" Auto Latch - Child Proof	25								
AUT0315	3" x 1-5/8" Auto Latch - Child Proof	25			•					
	MACNALATO		MICTIC	ATCHIN	CHEVIACUNIC					

MAGNA LATCH - MAGNETIC LATCHING-KEY LOCKING										
Item No.	Description	CASE QTY	LOOSE	25 EACH						
MLDD-BK/WT	Magnetic Latch Top Pull, BK or WT	15				ī				
MLS-BK/WT	Magnetic Latch Vertical Pull, BK or WT	10				# 1-100mm				
MLA-	Magna-Latch C/L Adaptor	25								

					•	
		KE	ENNEL	LATCH		
Item No.	Description	CASE QTY	LOOSE	10 EACH		
KL*	1-3/8" x 1-3/8" Kennel Latch	25				

	CLAW CLOSER									
Item No.	Description	CASE QTY	LOOSE	50 EACH						
CC213*	2"x 1-3/8"Claw Closer	12								
CC253*	2-1/2" x 1-3/8" Claw Closer	12								

* = COMBINE 10 CASES OF ANY SYSTEM 21 OR GALV. CHAIN LINK FITTINGS WITH AN ASTERISK FOR A 20% DISCOUNT



Item No. Description CASE QTY LOOSE 24 EACH #STA-KLOS" GATE CLOSER Item No. Description CASE QTY LOOSE 25 EACH STA200* 2"x 1-3/8" STA-KLOS Gate Closer 25 STA250* 2-1/2" x 1-3/8" STA-KLOS Gate Closer 25

	RESIDENTIAL LOCKING DEVICE									
Item No.	Description	CASE QTY	L00SE	10 EACH		100				
RLD*	1-3/8" x 1-3/8" Residential Locking Device	10				4				

	DROP RODS									
Item No.	Description	CASE QTY	LOOSE	25 EACH						
RDR	Residential Drop Rod	25								
PFH138*	1-3/8" (P/S Frame Hinge) Drop Rod Guide	100								
			SCRO	LLS						
Item No.	Description	CASE QTY	LOOSE	50 EACH						
SCR18	18″ Scroll	50			36					

* = COMBINE 10 CASES OF ANY SYSTEM 21 OR GALV. CHAIN LINK FITTINGS WITH AN ASTERISK FOR A 20% DISCOUNT

Eastern Chain Link 04/24/23

1.800.339.3362 • www.easternfence.com



			GATE (CLIPS	
Item No.	Description	CASE QTY	LOOSE	CASE	

GC138* 1-3/8" Gate Clip 250



	ALUMINUM GATE CORNERS								
Item No.	Description	CASE QTY	LOOSE	100 EACH					

AGC138* 1-3/8" Aluminum Gate Corner 100



	STEEL GATE CORNERS								
Item No.	Description	CASE QTY	LOOSE	50 EACH					

SGC158* 1-5/8" Steel Gate Corner 50



GATE CENTER STOP								
Item No.	Description	CASE QTY	LOOSE	10 EACH				

GCS* Gate Center Stop 10



			SATE HO	LD BACK
Item No.	Description	CASE QTY	LOOSE	25 EACH
·				

GHB* Gate Hold Back 25



* = COMBINE 10 CASES OF ANY SYSTEM 21 OR GALV. CHAIN LINK FITTINGS WITH AN ASTERISK FOR A 20% DISCOUNT



INDUSTRIAL HINGES - MALLEABLE - 180 (1-5/8" or 2" Frame)								
Item No.	Description	CASE QTY	LOOSE	12 EACH				
I0H250*	2-1/2" x 2" (or 1-5/8") Industrial Offset Hinge	12			00			
I0H300*	3" x 2" (or 1-5/8") Industrial Offset Hinge	12			0)			
I0H400*	4" x 2" (or 1-5/8") Industrial Offset Hinge	12			6			
I0H658*	6-5/8" x 2" (or 1-5/8") Industrial Offset Hinge	12						

	INDUSTRIAL BOX	HINGES	MALLEAE	3LE (1-5/8
Item No.	Description	CASE QTY	LOOSE	12 EACH
IBH250*	2-1/2" x2" (or 1-5/8") Industrial Box Hinge	12		
IBH300*	3"x 2" (or 1-5/8") Industrial Box Hinge	12		
IBH350*	3-1/2" x 2" (or 1-5/8") Industrial Box Hinge	12		
IBH400*	4" x 2" (or 1-5/8") Industrial Box Hinge	12		
IBH658*	6-5/8" x 2" (or 1-5/8") Industrial Box Hinge	12		
IBH858*	8-5/8" x 2" (or 1-5/8") Industrial Box Hinge	12		
180ATT*	180-Degree Box Hinge Adaptor	24		



3" or 2" Frame)

		SWING GATE WHEELS					
Item No.	Description	CASE QTY	LOOSE	10 EACH			
FEGR*	Front End Ground Roller	10					
SGRCL*	Swing Gate Roller - Chain Link	10					
SGRW*	Swing Gate Roller - Wood	10					
SGRSL*	Swing Gate Roller - Spring Loaded	10					



	INDUSTRIAL LOC	KING DEV	<mark>/ICE - PR</mark> I	ESSED STE	EL - 3 GUIDES
Itam Na	Docarintion	CACENTY	LAACE	20 EACH	

PILD* Industrial Locking Device - Pressed Steel 2" (or 1-5/8")

20



		INDUSTRI	L LOCKIN	G DEVIC	:	
Item No.	Description	CASE QTY	EACH LOOSE	PER 100		
ILD*	Industrial Locking Device	24			State Of	

* = COMBINE 10 CASES OF ANY SYSTEM 21 OR GALV. CHAIN LINK FITTINGS WITH AN ASTERISK FOR A 20% DISCOUNT

Eastern Chain Link 04/24/23

1.800.339.3362 • www.easternfence.com



		GALVAI	NIZED TENSION BARS	
Item No.	Description	EACH	1 BUNDLE EACH (25) 4 BUNDLE EACH (100)	MASTER BUNDLES
TB3	3/16" x 5/8" x 34" Galvanized Tension Bar			
TB42	3/16" x 5/8" x 40" Galvanized Tension Bar			
TB4	3/16" x 5/8" x 46" Galvanized Tension Bar			
TB5	3/16" x 5/8" x 58" Galvanized Tension Bar			
TB6	3/16" x 5/8" x 70" Galvanized Tension Bar			
TBH6	3/16" x 3/4" x 70" Galvanized Tension Bar			
TBH7	3/16" x 3/4" x 82" Galvanized Tension Bar			
TBH8	3/16" x 3/4" x 94" Galvanized Tension Bar			
TBH10	3/16" x 3/4" x 118" Galvanized Tension Bar			
TBH12	3/16" x 3/4" x 142" Galvanized Tension Bar			
TBL12	3/16" x 3/8" x 142" Galvanized Tension Bar			
KR12	5/16" x 140" Kennel Rod			
			TRUSS RODS	
Item No.	Description	LOOSE	1 BUNDLE EACH (25) 4 BUNDLE EACH (100)	
TRA	3/8" x 11' Truss Rod with Nut (Available in System21 colors as well)			
TRT	Truss Rod Tightener (Available in System21 colors as well)			01 110
Item No.	Description	LOOSE	HOG RINGS 1 BUNDLE EACH (25) 4 BUNDLE EACH (100)	
AHR	Hog Rings - Aluminum			0
GHR	Hog Rings - Galvanized			

* = COMBINE 10 CASES OF ANY SYSTEM 21 OR GALV. CHAIN LINK FITTINGS WITH AN ASTERISK FOR A 20% DISCOUNT

Eastern Chain Link 04/24/23

1.800.339.3362 • www.easternfence.com



	BARB WIRE							
Item No.	Description	CASE QTY	PER ROLL	PALLETS				
BW15	15½-Gauge 4-PT Class 3 Galvanized 1320' Spool Barb Wire	27			N /			
BW3	12½-Gauge 4-PT Class 3 Galvanized 1320' Spool Barb Wire	27						
BWAZ	12½-Gauge Aluminized 1000′ Spool Barb Wire	CALL			/ \			

	1-PIECE STEEL BARB ARM							
Item No.	Description	CASE QTY	LOOSE	25 each				
BA158*	1-5/8" x 1-5/8" - 1-Piece Steel Barb Wire Arm	25						
BA215*	2" x 1-5/8" - 1-Piece Steel Barb Wire Arm	25						
BA255*	2-1/2" x 1-5/8" - 1-Piece Steel Barb Wire Arm	25						
BA315*	3" x 1-5/8" - 1-Piece Steel Barb Wire Arm	25		_	9			



		1-PIECE STEEL B	ARB V- <i>A</i>	NRM
Item No.	Description	CASE OTY	LOOSE	30 each

VA250* 2-1/2" x 1-5/8" - 1-Piece Steel V-Arm



	MALLEABLE CORNER BARB ARM								
Item No.	Description	CASE QTY	L00SE	30 each					
CBA250*	2-1/2" Malleable Corner Barb Wire Arm 3-Strand	30			di di				
CBA300*	3" Malleable Corner Barb Wire Arm 3-Strand	30							
CBA400*	4" Malleable Corner Barb Wire Arm 3-Strand	30							

30

	MALLEABLE CORNER V-ARMS								
Item No.	Description	CASE QTY	LOOSE	CASE					
CBA6250* 2-1	1/2" Malleable Corner Barb Wire Arm 6-Strand	30			1				
CBA6300* 3"N	Malleable Corner Barb Wire Arm 6-Strand	30							
CBA6400* 4"N	Malleable Corner Barb Wire Arm 6-Strand	30			A.				

* = COMBINE 10 CASES OF ANY SYSTEM 21 OR GALV. CHAIN LINK FITTINGS WITH AN ASTERISK FOR A 20% DISCOUNT

Eastern Chain Link 04/24/23

1.800.339.3362 • www.easternfence.com



STEEL BARB ARM BLADE 3 - Wire Z-Slot

Description CASE QTY

BABL* Steel Barb Arm Blade - Only 40



	STEEL BARB WIRE ARM BASE								
Item No.	Description	CASE QTY	LOOSE	50 each					
GBAB158	1-5/8" x 1-5/8" Steel Barb Arm Base	50							
GBAB215*	2" x 1-5/8" Steel Barb Arm Base	50							
GBAB255*	2-1/2" x 1-5/8" Steel Barb Arm Base	50							
GBAB315*	3" x 1-5/8" Steel Barb Arm Base	50							
GBAB355	3-1/2" x 1-5/8" Steel Barb Arm Base	50							
GBAB415*	4" x 1-5/8" Steel Barb Arm Base	50							
		CANTILE	VER BARI	B ARM					

Item No.	Description	CASE QTY	EACH LOOSE	CASE	

BAC Cantilever Barb Wire Arm - Bolt On 24



	QUICK SET ANCHORING CEMENT						
Item No.	Description	CASE QTY	LOOSE	CASE			

EQS Anchoring Cement - Eastern Quick Set 36



★ = COMBINE 10 CASES OF ANY SYSTEM 21 OR GALV. CHAIN LINK FITTINGS WITH AN ASTERISK FOR A 20% DISCOUNT



FULCRUM LATCHES Item No. Description 10 EACH FUL250* 2-1/2" x 2" (or 1-5/8") Fulcrum Latch - Single Leaf 10 FUL300* 3" x 2" (or 1-5/8") Fulcrum Latch - Single Leaf 10 FUL400* 4" x 2" (or 1-5/8")Fulcrum Latch - Single Leaf 10 2" (or 1-5/8") Fulcrum Latch - Double Leaf FUL200* 10



HI SECURITY DOUBLE GATE LATCH

Item No.	Description	CASE QTY	LOOSE	15 EACH

HSGL* 2" (or 1-5/8") Hi Security Double Gate Latch 15



	CANTILEVER LATCH - SINGLE LEAF							
Item No.	Description	CASE QTY	LOOSE	CASE				
CL300*	3" x 2" Cantilever Latch - Single Leaf	10						
CL400*	4" x 2" Cantilever Latch - Single Leaf	10						

CANTILEVER LATCH DOUBLE LEAF

Item No. Description CASE QTY LOOSE CASI

RGL-000* 2" x 2" Cantilever Latch - Double Leaf



	CANTILEVER ROLLER							
Item No.	Description	CASE QTY	LOOSE	10 EACH				
CR400N*	4" x 2-1/2" (or 2") Cantilever Roller NYLON	10			H			
CR300*	3" x 2-1/2" (or 2") Cantilever Roller	10						
CR400*	4" x 2-1/2" (or 2") Cantilever Roller	10			4			
CR658*	6-5/8" x 2-1/2" (or 2") Cantilever Roller	10						

	CANTILEVER ROLLER GUARD	(Must Order Guard With Each Roller)
--	-------------------------	-------------------------------------

Item No. Description CASE QTY LOOSE 10 EACH

CRGUARD* Cantilever Roller Guard (Must Order With Rollers) 10



* = COMBINE 10 CASES OF ANY SYSTEM 21 OR GALV. CHAIN LINK FITTINGS WITH AN ASTERISK FOR A 20% DISCOUNT

Eastern Chain Link 04/24/23

1.800.339.3362 • www.easternfence.com

MISCELLANEOUS



	COIL SPRING WIRE - Availab	le in Black (I	BK), Brown	(BR), Eastern Green (EG)
Item No.	Description	LOOSE	PER 100	
CW6-	6-Gauge x 1000' Vinyl Coil Spring Tension Wire			
CW9-	Coil Straight Wire			
GSW7	7-Gauge Galvanized Coil Spring Tension Wire			
AZSW7	7-Gauge Aluminized Coil Spring Tension Wire			
		GALVANIZE	CHAIN	

PER FOOT PER 250 FEET

CHAIN 3/16 HD Galvanized Chain



DACASIVI EL DASEDALLDACASIVI ADALIVA,	ΚΔ(ΚΝΙΟΡ"ΕΙ" - ΚΔΝΕΚΔΙΙ ΚΔ(ΚΝΙΟΡ ΔΙΙΔΡΙΟΚ	DACUCTAD //FL// DACEDALL DACUCTAD ADADTAD	
		BACKSTOP "EL" - BASEBALL BACKSTOP ADAPTOR	BACKSTOP "EL" - BASEBALL BACKSTOP ADAPTOR

Item No. Description LOOSE PER 100

Description

BSL* Back Stop "EI"

Item No.




	N			
Item No.	Description	LOOSE	PER 100	
MFF200* 2" Mallea	ble Floor Flange			
MFF250* 2-1/2" Ma	illeable Floor Flange			
MEE200* 2"Mallaa	hla Elaar Elanga			

MFF300*	3" Malleable Floor Flange		
	FLOOR FLANGE - STEEL WELDA	ABLE (Other Sizes in Stock)	
Item No.	Description LOOSE	PER 100	
FF4414*	4" x 4" x 1/4" Floor Flange Plate		
FF6614*	6" x 6" x 1/4" Floor Flange Plate		
FF6638*	6" x 6" x 3/8" Floor Flange Plate		W 11/2
FF8814*	8" x 8" x 1/4" Floor Flange Plate		
FF8838*	8" x 8" x 3/8" Floor Flange Plate		

* = COMBINE 10 CASES OF ANY SYSTEM 21 OR GALV. CHAIN LINK FITTINGS WITH AN ASTERISK FOR A 20% DISCOUNT

Eastern Chain Link 04/24/23

1.800.339.3362 • www.easternfence.com

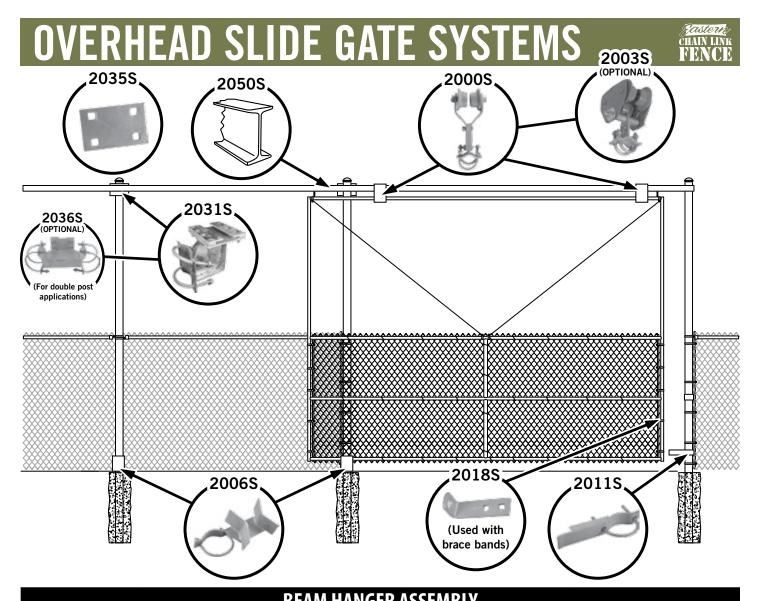

	BEAM HANGEK	ASSEMBLY	
Item No.	Description	Wt. Each	LOOSE
20315	Beam Hanger for 4" Post	12.250#	
2036S	Beam Hanger for Double 4" Post	15.000#	
2035\$	Beam Splice Plate	1.000#	
2000S	Trolley Wheel and Assembly	8.000#	
20035	4-Wheel Double Trolley	8.000#	
	GUIDE ASSI	EMBLY	
Item No.	Description	Wt. Each	LOOSE
2006S	4" Guide Assembly	7.000#	
	STOP ASSE	MBLY	
Item No.	Description	Wt. Each	LOOSE
2011S	4" Stop Assembly	3.000#	
	LOCKING STOP	ASSEMBLY	
Item No.	Description	Wt. Each	LOOSE
2018S	Locking Bracket	.500#	
	I-BEAM OVERHI	EAD TRACK	
Item No.	Description	Wt. Each	LOOSE
2050S	5"Galvanized x 20' l-Beam Overhead Track	12.500#	
Eastern Ch	nain Link 04/24/23 1.800.339.3362	• www.easternfence.com	Page B-49

OVERHEAD SLIDE GATE SYSTEMS




Item No.	SLIDING GATE TRACK SYSTEMS - LIGHT WEI Description LOOSE PER FOOT	GHT GATES GALVANIZED	
5116-10	10' Sliding Gate Track		1-3/4
1050T	Sliding Gate Truck w/4-1/2" Bolt	60	
51F	Sliding Gate Single Bracket		
51G	Sliding Gate Single Splice Bracket	6	
51HS	Sliding Gate Double Splice Bracket		
51ED	Sliding Gate Track End Cap		

Heavier Rail and Specialty Items Available Upon Request "GATE PRICES – CALL FOR QUOTE"







	RAZOR RIBBON - BARBED OBSTACLE TAPES						
Item No.	Description	1-9 ROLLS	10-25 ROLLS	26-50 ROLLS			
RR18-GALV	18" Diameter 50' Roll Galvanized Barbed Obstacle Tape						
RR18	18" Diameter 50' Roll Stainless Steel Barbed Obstacle Tape						



Recommended for general commercial security purposes.



Recommended for commercial facilities which require high security.



Recommended for correctional and other highly sensitive areas.

RAZOR RIBBON TOOLS						
Item No.	Description	LOOSE				
FTT	Automatic Tie Twisting Tool					
RAZOR RIBBON TIES						
Item No.	Description	BAG 100 PER	BUNDLE 50 BAGS			
SFT16	Steel 16-Gauge x 8" Double Loop Tie Galvanized					
RRTIESS	18-Gauge x 8" Stainless Steel Double Loop Tie					


Barbed tape products are not designed or intended for residential application. These products are not to be used as ground barriers on commercial applications. Ground barriers should only be used in locations such as military installations and correctional facilities. The manufacturer recommends that all barbed tape be installed on existing fences or walls not less than 7 ft. above ground level. This material shall also be installed in such a manner as to present a clear and highly visible element of danger, and to avoid any and all contact with pedestrian traffic. Do not attempt to conceal, disguise, or transform these products under any condition or application. Eastern disclaims legal accountability from any and all damages, claims, and legal actions as the result of injury caused by improper installation or failure to comply with the relevant laws, codes, and ordinances applicable to these products. Be certain to check all local regulations governing security fencing products, and specific zoning requirements and restrictions as they may apply. The use of protective gloves and proper installation tools by experienced personnel is recommended.

SPEED RAIL FITTINGS (ALUMINUM)



OTHER SIZES AND FITTING STYLES AVAILABLE - PLEASE CALL FOR MORE INFO


SPEED RAIL FITTINGS ALUMINUM						
Description	1-3/8" CODE. Each	1-5/8" Code Each	2" Code Each	2-1/2"Code Each		
#3 - Elbow	SR1383	SR1583	SR2003	SR2503		
#5 - Tee	SR1385	SR1585	SR2005	SR2505		
#7 - Cross	SR1387	SR1587	SR2007	SR2507		
#9 - Side Outlet Ell.	SR1389	SR1589	SR2009	SR2509		
#11 - Side Outlet Tee	SR13811	SR15811	SR20011	SR25011		
#13 - Side Outlet Cross	SR13813	SR15813	SR20013			
#17 - Adj. Tee	SR13817	SR15817	SR20017			
#19 - Adjustable Cross	SR13819	SR15819	SR20019			
#23 - Adjustable Tee/Cross	SR13823	SR15823	SR20023			
#41 - Adjustable Wall Flange	SR13841	SR15841	SR20041			
#47 - Rect. Base Flange	SR13847	SR15847	SR20047	SR25047		
#60 - Plug (for use w/ Sched. 40 Pipe)	SR13860	SR15860	SR20060	SR25060		
#62 - Plug (for use w/ Sched. 40 Pipe)	SR13862	SR15862	SR20062			

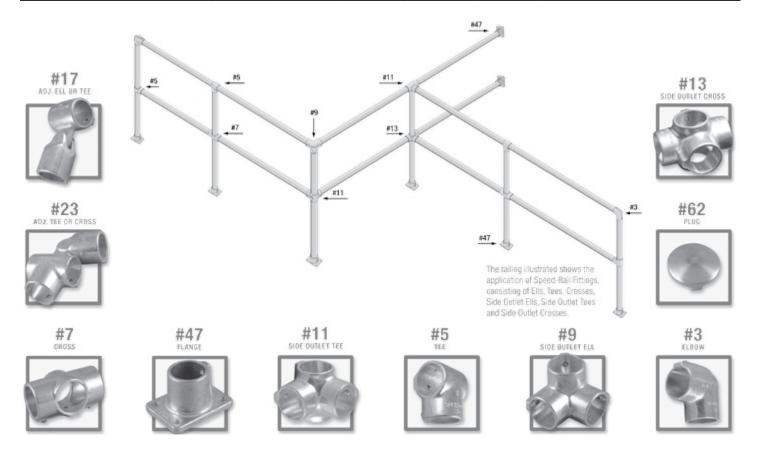

GALVANIZED SPEED-RAIL FITTINGS



EASTERN GALVANIZED SPEED-RAIL FITTINGS IMAGES

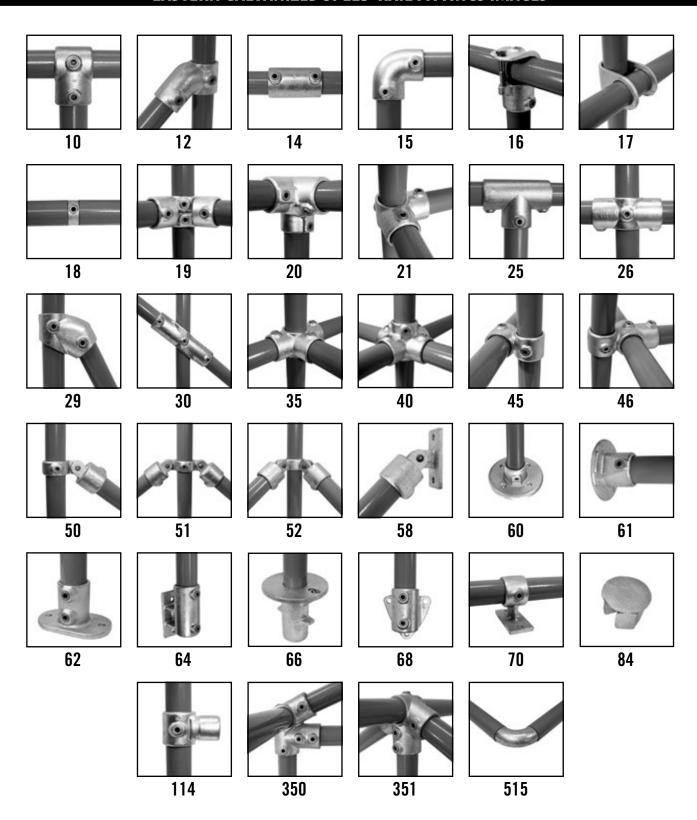

GALVANIZED SPEED-RAIL FITTINGS



	EASTERN GALVANIZED SPEED-RAIL FITTINGS						
ltem		1-3/8" Item No. Each	1-5/8" Item No. Each	2" Item No. Each	2-1/2" Item No. Each		
#10	Single Socket Tee	GR13810	GR15810	GR20010	GR25010		
#12	45-Degree Single Socket Tee	GR13812	GR15812	GR20012			
#14	Straight Coupling	GR13814	GR15814	GR20014	GR25014		
#15	90-Degree Elbow	GR13815	GR15815	GR20015	GR25015		
#16	Clamp-on Tee	GR13816	GR15816	GR20016	GR25016		
#17	Clamp-on Crossover	GR13817	GR15817	GR20017	GR25017		
#18	Internal Coupling	GR13818	GR15818	GR20018			
#19	Adjustable Side Outlet Tee	GR13819	GR15819	GR20019	GR25019		
#20	Side Outlet Elbow	GR13820	GR15820	GR20020	GR25020		
#21	90-Degree Side Outlet Tee	GR13821	GR15821	GR20021	GR25021		
#25	3-Socket Tee	GR13825	GR15825	GR20025	GR25025		
#26	2-Socket Cross	GR13826	GR15826	GR20026	GR25026		
#29	30-60-Degree Single Socket Tee	GR13829	GR15829	GR20029			
#30	30-45-Degree Adjustable Cross	GR13830	GR15830	GR20030			
#35	3-Socket Cross	GR13835	GR15835	GR20035	GR25035		
#40	4-Socket Cross	GR13840	GR15840	GR20040	GR25040		
#45	Crossover	GR13845	GR15845	GR20045	GR25045		
#46	Combo Socket Tee	GR13846	GR15846	GR20046	GR25046		
#50	Single Swivel Socket	GR13850	GR15850	GR20050	GR25050		
#51	Double Swivel Socket	GR13851	GR15851	GR20051	GR25051		
#52	Corner Swivel Socket	GR13852	GR15852	GR20052			
#58	Swivel Flange	GR13858	GR15858	GR20058	GR25058		
#60	Extra Heavy Round Flange	GR13860	GR15860	GR20060			
#61	Round Flange	GR13861	GR15861	GR20061	GR25061		
#62	Railing Flange	GR13862	GR15862	GR20062	GR25062		
#64	Standard Vertical Railing Base	GR13864	GR15864	GR20064			
#66	Ground Socket	GR13866	GR15866	GR20066			
#68	Wall Flange	GR13868	GR15868	GR20068			
#70	Rail Support	GR13870	GR15870	GR20070			
#84	Malleable Drive Plug	GR13884	GR15884	GR20084	GR25084		
#114	Swiveltee Internal	GR138114	GR158114	GR200114			
#350	Eaves Fitting			GR200350			
#351	Ridge Fitting			GR200351			
#515	2-Side Internal Elbow		GR158515				

Eastern Chain Link 04/24/23

1.800.339.3362 • www.easternfence.com

ROLLING GATE KITS



ROLLING GATE KITS

Item No. Description LOOSE

H-128KIT Rolling Gate Kit

Kit Includes:

1 Each - #DWC-128 12" wide carrier with 8" wheels (*OPTIONAL pneumatic wheels)

1 Each - #RGL-000 Latch (Reg. 2 brace bands - not included)


6 Each - #UTB-278 Universal Track Bracket (2", 2-1/2" or 3" 0.D.) - (*0PTIONAL for 4" Post RTB-000)

2 Each - #SPW-000 Track wheels

2 Each - #PWB-158 Wheel brackets for 1-5/8" frame 2 Each - #PWB-178 Wheel brackets for 2" frame

NOTE: "BEVELED BRACE BANDS" are recommended wherever attaching bands are required.

FRAME CONFIGURATION

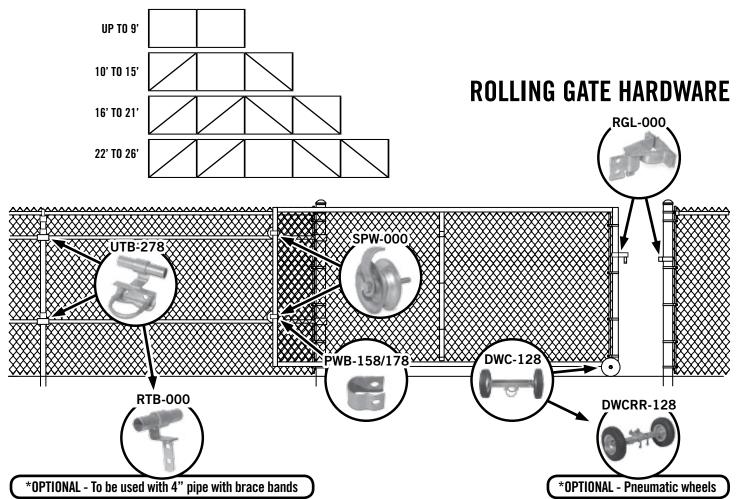


ROLLING GATE HARDWARE



Item No.	ROLLING GATE HARDWARE Description CASE QTY LOOSE CASE	
DWC-128	12" Wide Carrier with 8" Wheels	
DWCRR-128	12" Wide Carrier with 8" Pneumatic Rut Runner Wheels	
RGL-000	Rolling Gate latch - Lockable	
UTB-278	2-1/2" or 3" Universal Track Bracket	
RTB-000	Residential Track Bracket	
SPW-000	Safety Track Wheels	
PWB-158	1-5/8" Pipe Wheel Bracket	
PWB-178	2" Pipe Wheel Bracket	

GALVANIZED RESIDENTIAL GATE FRAMES



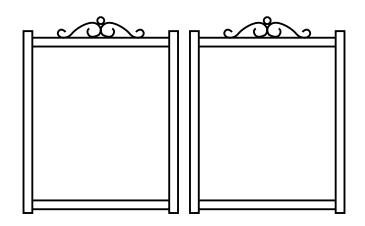

SPEC. GALVANIZED FRAMEWORK - RESIDENTIAL GRADE Welded fabrication using residential 17Ga- .055 domestic pipe | Frames below are unfilled

Item No.	Nominal O.D.	Description	Opening	Height	Loose Each
GF34	1-3/8"	Galvanized Frame Single Gate	36"	4′	
GF35	1-3/8"	Galvanized Frame Single Gate	36"	5′	
GF36	1-3/8"	Galvanized Frame Single Gate	36"	6′	
GF424	1-3/8"	Galvanized Frame Single Gate	42"	4′	
GF425	1-3/8"	Galvanized Frame Single Gate	42"	5′	
GF426	1-3/8"	Galvanized Frame Single Gate	42"	6′	
GF44	1-3/8"	Galvanized Frame Single Gate	48"	4′	
GF45	1-3/8"	Galvanized Frame Single Gate	48"	5′	
GF46	1-3/8"	Galvanized Frame Single Gate	48"	6′	
GF54	1-3/8"	Galvanized Frame Single Gate	60"	4′	
GF55	1-3/8"	Galvanized Frame Single Gate	60"	5′	
GF56	1-3/8"	Galvanized Frame Single Gate	60"	6'	
DD84	1-3/8"	Galvanized Double Drive	96"	4′	
DD85	1-3/8"	Galvanized Double Drive	96"	5′	
DD86	1-3/8"	Galvanized Double Drive	96"	6′	
DD104	1-3/8"	Galvanized Double Drive	120"	4′	
DD105	1-3/8"	Galvanized Double Drive	120"	5′	
DD106	1-3/8"	Galvanized Double Drive	120"	6′	
DD124	1-3/8"	Galvanized Double Drive	144"	4′	
DD125	1-3/8"	Galvanized Double Drive	144"	5′	
DD126	1-3/8"	Galvanized Double Drive	144"	6′	

****FILLED FRAMES ALSO AVAILABLE****

Note: Please call to order filled frames

Scrolls are fastened on 4' high gates ONLY. 5' high and up are center braced.

Non-stock sizes available upon request - Call for \$\$

GALVANIZED INDUSTRIAL WALK GATE FRAMES FENCE


SPEC INDUSTRIAL FRAMES: GALVANIZED ONLY


Welded Fabrication using SS20 0.85 wall (for 1-5/8) and SS20 0.90 wall (for 2" frames) Frames only — No fabric included

		Па	SINGLEWALK G	ATEC
Item#	Frame Size	Opening	Height	Each Loose
IG158-34	1-5/8"	3' OPENING	4' High	
IG158-35	1-5/8"	3' OPENING	5' High	
IG158-36	1-5/8"	3' OPENING	6' High	
IG158-37	1-5/8"	3' OPENING	7' High	
IG158-38	1-5/8"	3' OPENING	8' High	
IG158-44	1-5/8″	4' OPENING	4' High	
IG158-45	1-5/8"	4' OPENING	5' High	
IG158-46	1-5/8"	4' OPENING	6' High	
IG158-47	1-5/8"	4' OPENING	7' High	
IG158-48	1-5/8"	4' OPENING	8' High	
IG158-54	1-5/8"	5' OPENING	4' High	
IG158-55	1-5/8"	5' OPENING	5' High	
IG158-56	1-5/8"	5' OPENING	6'High	
IG158-57	1-5/8"	5' OPENING	7' High	
IG158-58	1-5/8"	5' OPENING	8' High	
IG200-36	2"	3' OPENING	6' High	_
IG200-37	2"	3' OPENING	7' High	
IG200-38	2"	3' OPENING	8' High	
IG200-46	2"	4' OPENING	6' High	
IG200-47	2"	4' OPENING	7' High	
IG200-48	2"	4' OPENING	8' High	
IG200-56	2"	5' OPENING	6' High	
IG200-57	2"	5' OPENING	7′ High	
IG200-58	2"	5' OPENING	8' High	



FRAME CONFIGURATIONS







GALVANIZED INDUSTRIAL DOUBLE DRIVE FRAMES



SPEC INDUSTRIAL FRAMES: GALVANIZED ONLY

Welded Fabrication using SS20 0.85 wall (for 1-5/8) and SS20 0.90 wall (for 2" frames) Frames only — No fabric included


		110	rialiles offy — No fabric included			
		,	DOUBLE DRIV			
Item#	Frame Size	Opening	Height	Each Loose		
IG158-104	1-5/8"	10' OPENING	4' High			
IG158-105	1-5/8"	10' OPENING	5' High			
IG158-106	1-5/8"	10' OPENING	6' High			
IG158-107	1-5/8"	10' OPENING	7′ High			
IG158-108	1-5/8"	10' OPENING	8' High			
IG158-124	1-5/8"	12' OPENING	4' High			
IG158-125	1-5/8"	12' OPENING	5' High			
IG158-126	1-5/8"	12' OPENING	6′ High			
IG158-127	1-5/8"	12' OPENING	7′ High			
IG158-128	1-5/8"	12' OPENING	8' High			
IG158-144	1-5/8"	14' OPENING	4' High			
IG158-145	1-5/8"	14' OPENING	5' High			
IG158-146	1-5/8"	14' OPENING	6' High			
IG158-147	1-5/8"	14' OPENING	7' High			
IG158-148	1-5/8"	14' OPENING	8' High			
IG158-164	1-5/8"	16' OPENING	4' High			
IG158-165	1-5/8"	16' OPENING	5' High			
IG158-166	1-5/8"	16' OPENING	6' High			
IG158-167	1-5/8"	16' OPENING	7' High			
IG158-168	1-5/8"	16' OPENING	8' High			
IG158-184	1-5/8"	18' OPENING	4' High			
IG158-185	1-5/8"	18' OPENING	5' High			
IG158-186	1-5/8"	18' OPENING	6' High			
IG158-187	1-5/8"	18' OPENING	7' High			
IG158-188	1-5/8"	18' OPENING	8' High			
IG200-106	2"	10' OPENING	6' High			
IG200-107	2"	10' OPENING	7' High			
IG200-108	2"	10' OPENING	8' High			
IG200-126	2"	12' OPENING	6' High			
IG200-127	2"	12' OPENING	7' High			
IG200-128	2"	12' OPENING	8' High			
IG200-146	2"	14' OPENING	6' High			
IG200-147	2"	14' OPENING	7' High			
IG200-148	2"	14' OPENING	8' High			
IG200-166	2"	16' OPENING	6' High			
IG200-167	2"	16' OPENING	7' High			
IG200-168	2"	16' OPENING	8' High			
IG200-186		18' OPENING	6' High			
IG200-187	2"	18' OPENING	7' High			
IG200-188	2"	18' OPENING	8' High			
IG200-226	2"	22' OPENING	6' High			
IG200-227	2"	22' OPENING	7' High			
IG200-228	2"	22' OPENING	8' High			
IG200-266	2"	26' OPENING	6' High			
IG200-267	2"	26' OPENING	7' High			
IG200-268	2"	26' OPENING	8' High			
IG200-306	2"	30' OPENING	6' High			
IG200-300	2"	30' OPENING	7' High			
10200-307	<u>L</u>	JU UI LININU	/ HigH			

30' OPENING




FRAME CONFIGURATIONS

Up to 10' Wide (Price Includes 2 leafs)



12' to 24' Wide (Price Includes 2 leafs)



26' to 30' Wide (Price Includes 2 leafs) ("K" Brace Recommended)



SWING GATE Recommended Post Sizes							
MAXIMUM MAXIMUM Single Double							
3" O.D.	6'	12'					
4" O.D.	13'	26'					
6-5/8" O.D.	18'	36'					
8-5/8" O.D.	18' UP	36' UP					




IG200-308

8' High

BARRIER GATES



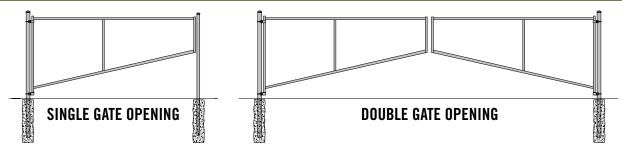

Easy to install Eastern Barrier Gates are great for using with commercial or residential applications. They are a perfect way to restrict vehicular access to a property. Eastern Barrier Gates can be installed in single swing or double swing configurations.

Color Coated System21 Gates Available Upon Request | Notched and/or Hammered Joints | Welded After Galvanizing Seams Painted With Welder's Paint After Welding | Vertical Bracing Varies Per Gate Width Compatible With a Variety of Gate Hinges and Latches | Custom Designs Available Upon Request (Customers Must Prepare Own Drawing)

			1-5/8" FRAME SIZE	
Item#	Frame Size	Opening	Height	Each Loose
BG158-6	1-5/8"	6' SINGLE GATE OPENING	4' High - 2' High	
BG158-8	1-5/8"	8' SINGLE GATE OPENING	4' High - 2' High	
BG158-10	1-5/8"	10' DOUBLE GATE OPENING	4' High - 2' High	
BG158-10SF	1-5/8"	10' SINGLE GATE OPENING	4' High - 2' High	
BG158-11	1-5/8"	11' DOUBLE GATE OPENING	4' High - 2' High	
BG158-12	1-5/8"	12' DOUBLE GATE OPENING	4' High - 2' High	
BG158-12SF	1-5/8"	12' SINGLE GATE OPENING	4' High - 2' High	
BG158-13SF	1-5/8"	13' SINGLE GATE OPENING	4' High - 2' High	
BG158-14	1-5/8"	14' DOUBLE GATE OPENING	4' High - 2' High	
BG158-16	1-5/8"	16' DOUBLE GATE OPENING	4' High - 2' High	
BG158-16SF	1-5/8"	16' SINGLE GATE OPENING	4' High - 2' High	
BG158-17 BG158-17SF	1-5/8" 1-5/8"	17' DOUBLE GATE OPENING 17' SINGLE GATE OPENING	4' High - 2' High 4' High - 2' High	
BG158-18	1-5/8"	18' DOUBLE GATE OPENING	4' High - 2' High	
BG158-18SF	1-5/8"	18' SINGLE GATE OPENING	4' High - 2' High	
BG158-20	1-5/8"	20' DOUBLE GATE OPENING	4' High - 2' High	
BG158-22	1-5/8"	22' DOUBLE GATE OF ENING	4' High - 2' High	
BG158-24	1-5/8"	24' DOUBLE GATE OPENING	4' High - 2' High	
BG158-24SF	1-5/8"	24' SINGLE GATE OPENING	4' High - 2' High	
BG158-25	1-5/8"	25' DOUBLE GATE OPENING	4' High - 2' High	
BG158-26	1-5/8"	26' DOUBLE GATE OPENING	4' High - 2' High	
BG158-28	1-5/8"	28' DOUBLE GATE OPENING	4' High - 2' High	
BG158-30	1-5/8"	30' DOUBLE GATE OPENING	4' High - 2' High	
BG158-32	1-5/8"	32' DOUBLE GATE OPENING	4' High - 2' High	
BG158-44	1-5/8"	44' DOUBLE GATE OPENING	4' High - 2' High	
			2" FRAME SIZE	
Item#	Frame Size	Opening	Height	Each Loose
BG200-6	2"	6' SINGLE GATE OPENING	4' High - 2' High	
BG200-8	2"	8' SINGLE GATE OPENING	4' High - 2' High	
BG200-10	2"	10' DOUBLE GATE OPENING	4' High - 2' High	
BG200-11	2"	11' DOUBLE GATE OPENING	4' High - 2' High	
BG200-12	2" 2"	12' DOUBLE GATE OPENING	4' High - 2' High	
BG200-12SF BG200-14	2"	12' SINGLE GATE OPENING 14' DOUBLE GATE OPENING	4' High - 2' High 4' High - 2' High	
BG200-14SF	2"	14' SINGLE GATE OPENING	4' High - 2' High	
BG200-145F	2"	15' SINGLE GATE OF ENING	4' High - 2' High	
BG200-16	2"	16' DOUBLE GATE OPENING	4' High - 2' High	
BG200-16SF	2"	16' SINGLE GATE OPENING	4' High - 2' High	
BG200-18	2"	18' DOUBLE GATE OPENING	4' High - 2' High	
BG200-19SF	2"	19' SINGLE GATE OPENING	4' High - 2' High	
BG200-20	2"	20' DOUBLE GATE OPENING	4' High - 2' High	
BG200-20SF	2"	20' SINGLE GATE OPENING	4' High - 2' High	
_BG200-21	2"	21' DOUBLE GATE OPENING	4' High - 2' High	
BG200-22	2"	22' DOUBLE GATE OPENING	4' High - 2' High	
BG200-24	2"	24' DOUBLE GATE OPENING	4' High - 2' High	
BG200-25	2"	25' DOUBLE GATE OPENING	4' High - 2' High	
BG200-26	2" 2"	26' DOUBLE GATE OPENING	4' High - 2' High	
BG200-28 BG200-30	2"	28' DOUBLE GATE OPENING 30' DOUBLE GATE OPENING	4' High - 2' High 4' High - 2' High	
BG200-30 BG200-31	2"	31' DOUBLE GATE OPENING	4' High - 2' High	
BG200-34	2"	34' DOUBLE GATE OPENING	4' High - 2' High	
BG200-35	2"	35' DOUBLE GATE OF ENING	4' High - 2' High	
	Obain Link		1 000 000 0000 0 0000	acateurs and David D. (1)

Eastern Chain Link 04/24/23

1.800.339.3362 • www.easternfence.com

PEN PALS KENNELS/ENCLOSURES






KENNELS/ENCLOSURES

FRAMES:

1-3/8" O.D. galv. tubing

FABRIC:

2-3/8" mesh, 12½-Gauge Smooth Galvanized Wire

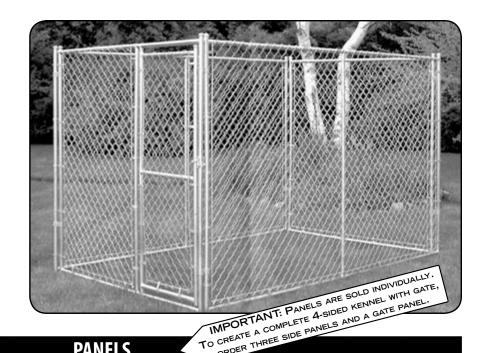

	PANELS TO CREEK THREE 3											
		6′ H	IGH			5′ H	IGH			4′ H	IIGH	
	SIDE P	ANEL	GATE P	ANEL	SIDE	PANEL	GATE P	ANEL	SIDE PANEL		GATE PANEL	
WIDTH	ITEM	COST	ITEM	COST	ITEM	COST	ITEM	COST	ITEM	COST	ITEM	COST
3′	KP36		KGP36		KP35		KGP35		KP34		KGP34	
4′	KP46		KGP46		KP45		KGP45		KP44		KGP44	
5′	KP56		KGP56		KP55		KGP55		KP54		KGP54	
6′	KP66		KGP66		KP65		KGP65		KP64		KGP64	
8′	KP86		KGP86		KP85		KGP85		KP84		KGP84	
10′	KP106		KGP106		KP105		KGP105		KP104		KGP104	
12′	KP126		KGP126		KP125		KGP125		KP124		KGP124	
14′	KP146		KGP146		KP145		KGP145		KP144		KGP144	

IMPORTANT: Panels are sold individually. To create a complete 4-sided kennel with gate, order three side panels and a gate panel.

OPTIONS/ACCESSORIES:

9 gauge, 2" mesh, Vinyl-clad fabric Add 15%
9 gauge, 2" mesh, Galvanized fabric Add 20%
Puppy, snow, or hesitation panel Add \$
Dog house openings Add \$
ADC138 Alum-Dome Cap (Need 9) \$
SC138 Saddle Clamp. (Need 8) \$

COMPLETE KENNELS/ENCLOSURES

6'H - 6'W - 10'L CALL FOR PRICE 6'H - 6'W - 12'L CALL FOR PRICE

INTERNAL SLIDE GATES

SLIDE GATES

One of the industry's most versatile gates, Eastern Slide Gates cover a wide range of applications. From airports, warehouses, and military facilities, to industrial storage yards, housing sites, and even prisons, Eastern Slide Gates are the professional's choice.

Eastern Slide Gates use a unique roller bearing system sealed above in a one piece enclosed track to provide maintenance free performance. With no roller bearings on the ground to trap debris, operation of the gate is always smooth and easy. Added stability and strength are provided by a vertical member securely welded to the one piece track member.

Constructed of a high quality aluminum, Eastern Slide Gates are both light weight and durable. A chain link fabric is secured to the gate frame on all four sides with J-bolts. This makes for a much more stable gate then those secured in conventional ways.

A color coated finish is an added available option to match any color requirement you may have. Eastern's color coated fence option is always the perfect quality touch. If a specialized gate fits the bill. let our custom design team develop the perfect gate for your needs.

Eastern Internal Slide Gates are custom made to fit your opening. There are 2 parts of a cantilever gate. The part which covers the opening, and the back section called the "counter balance," (which is a minimum of 40% of the opening). I.E., a 20' opening has a minimum of an 8' counterbalance.

The track of your Eastern gate and the member of the gate frame are a one piece aluminum extrusion. There are no bolt-on tracks. All other members of the frame are welded to the top member. Unlike some similar gates that bolt together, your Eastern gate will be trouble free for many years.

Because the track is at the top, there are no ground rollers. There are guide rollers on the post that keep the bottom of the gate from swaying.

The top roller assemblies each have 4 factory lubricated and sealed roller bearing wheels that operate inside the track. Because they are inside the track, they are unaffected by ice, snow, dirt, or other debris.







ISTB - Internal Slide Gate Track Bracket



Gate Bottom Guide











ANY SIZE OPENING

INTERNAL SLIDE GATE HARDWARE KITS



	INTERNAL SLIDE GATE HARDWARE KITS - SQUARE POST	
Item No.	Description	Each
EOESG-KIT	INCLUDED HARDWARE FOR SQUARE POST SINGLE GATE KIT	
	ISGUIDE-S4 (2 each) Internal Slide BTM Guide for 4" Square Post	
	ISL-S4 (1 each) Internal Slide Gate Latch 4" Square Post,	
	ISTB-S4 (2 each) Internal Slide Track Bracket for 4" Square Post	
	ISTA (2 each) Internal Slide Track Assembly (Used Inside Track of Gate)	
EOESGDT-KIT	INCLUDED HARDWARE FOR SQUARE POST DUAL TRACK KIT	
	ISGUIDE-S4 (2 each) Internal Slide BTM Guide for 4" Square Post	
	ISL-S4 (1 each) Internal Slide Gate Latch 4" Square Post,	
	ISTB-S4 (4 each) Internal Slide Track Bracket for 4" Square Post	
	ISTA (4 each) Internal Slide Track Assembly (Used Inside Track of Gate)	
	INTERNAL SLIDE GATE HARDWARE KITS - ROUND POST	
Item No.	Description	Each
ESG-KIT	INCLUDED HADDWARF FOR DOUND DOCT CINCLE CATE VIT	
	INCLUDED HARDWARE FOR ROUND POST SINGLE GATE KIT	
	ISGUIDE-S4 (2 each) Internal Slide BTM Guide for 4" Round Post	
	ISGUIDE-S4 (2 each) Internal Slide BTM Guide for 4" Round Post	
	ISGUIDE-S4 (2 each) Internal Slide BTM Guide for 4" Round Post ISL (1 each) Internal Slide Gate Latch 4" Round Post,	
ESGDT-KIT	ISGUIDE-S4 (2 each) Internal Slide BTM Guide for 4" Round Post ISL (1 each) Internal Slide Gate Latch 4" Round Post, ISTB (4 each) Internal Slide Track Bracket for 4" Round Post	
ESGDT-KIT	ISGUIDE-S4 (2 each) Internal Slide BTM Guide for 4" Round Post ISL (1 each) Internal Slide Gate Latch 4" Round Post, ISTB (4 each) Internal Slide Track Bracket for 4" Round Post ISTA (4 each) Internal Slide Track Assembly (Used Inside Track of Gate)	
ESGDT-KIT	ISGUIDE-S4 (2 each) Internal Slide BTM Guide for 4" Round Post ISL (1 each) Internal Slide Gate Latch 4" Round Post, ISTB (4 each) Internal Slide Track Bracket for 4" Round Post ISTA (4 each) Internal Slide Track Assembly (Used Inside Track of Gate) INCLUDED HARDWARE FOR ROUND POST SINGLE GATE KIT	
ESGDT-KIT	ISGUIDE-S4 (2 each) Internal Slide BTM Guide for 4" Round Post ISL (1 each) Internal Slide Gate Latch 4" Round Post, ISTB (4 each) Internal Slide Track Bracket for 4" Round Post ISTA (4 each) Internal Slide Track Assembly (Used Inside Track of Gate) INCLUDED HARDWARE FOR ROUND POST SINGLE GATE KIT ISGUIDE-S4 (2 each) Internal Slide BTM Guide for 4" Round Post	



ISGUIDE - Internal Slide Gate Bottom Guide



ISL - Internal Slide Gate Latch



ISTB - Internal Slide Gate Track Bracket




ISTA - Internal Slide Gate Track Assembly (Used Inside Track of Gate)


INTERNAL SLIDE GATES






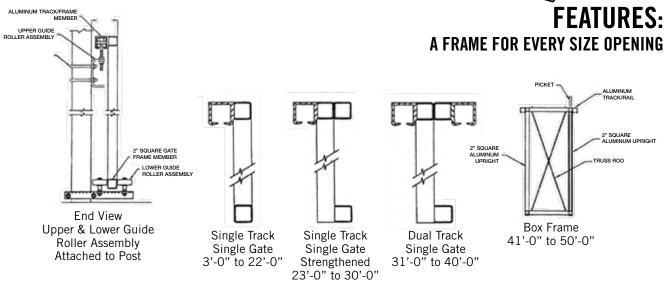

Gate Elevation - (4) Bays Shown

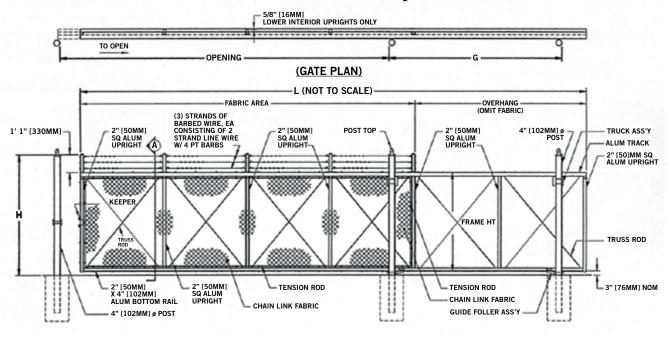



Fabric Stretched 4 Ways to Support the Fence

The "infill" of a Slide Gate helps to support the frame. When a chain link infill is desired, the chain link fabric is stretched 4 ways. This means that each strand of the wire acts as a truss to support the frame. Most manufacturers stretch their fabric in only one direction. In that case, the fabric works against the frame by merely adding weight.

INTERNAL SLIDE GATES





Eastern Internal Slide Gate Specifications:

1. Scope:

This specification covers materials and construction requirements for Eastern Chain Link Cantilever Slide Gates with enclosed track and hardware, up to 8' high.

2. Reference Standards:

ASTM B221 & F1184 TYPE II, CLASS 2

3. General

- A. Gate frame made of 2" square aluminum tubing the alloy and temper to be in accordance with 6063-T6. Tube shall be 0.94 lbs./ft. All members welded into a rigid 1-piece unit. There will be 2 truck assemblies, each having 4 factory lubricated and sealed roller bearing wheels that operate inside the track. A cantilever overhang support panel shall be provided for each leaf of the gate. The overhang shall be a minimum of 40% of the opening.
- B. Chain link fabric shall be installed using hook bolts that are inserted through pre-drilled holes in the frame. To these hook bolts the fabric will be attached by means of a tension bar which is laced through the last link of the fabric. The hook bolts are 15" on center and on all 4 sides of the gate.
- C. Diagonal adjustable 3/8" galvanized truss rods shall be provided inside each panel of the gate. All 8' sections shall have a double rod (one in each direction).
- D. The track and top-rail aluminum extrusion combination weighing 3.72 lbs./ft. shall withstand a 2,000 lb. reaction load.
- E. Truck assembly is a swivel type with a galvanized steel base unit and 4 lubricated sealed ball bearing rollers. Each roller is 2" in diameter and 9/16" in width. The truck shall have 2 side rollers to assure alignment inside the track. Truck assemblies are held to post using a 5/8" galvanized bolt. Truck assembly to withstand a 2,000 lb. reaction load.
- F. Gate post brackets, latch and keepers are galvanized steel.

4. Installation

Gate posts are to be set into concrete (3,000 PSI). The footing shall be 3'0" deep and 16" in diameter. The 4" O.D. posts should be 3'0" (approximately) into concrete footing. Posts must be plumb. Install gates making sure they are free of obstructions. Adjust for smooth operation.


CANTILEVER SLIDE GATES








SIDE VIEW - TYPICAL POST ROLLER

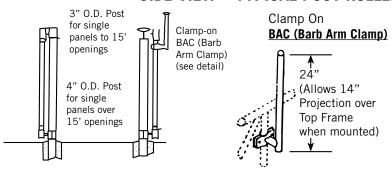

Notes

- Top/Bottom frame
 Members to be 2-1/2 0.D.
 Vertical Frame Members to be 2" 0.D.
 Diagonal/Horizontal
- 3. Diagonal/HorizontalMembers to be 1-5/8" O.D.4. Vinyl coating on bracing and vertical members

REAR VIEW - SHOWING BRACE CONSTRUCTION

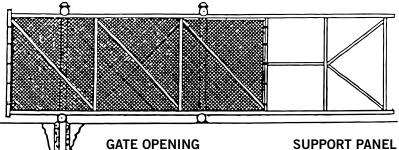

UP THRU 12'

OVER 12' THRU 24'

NOMINAL FENCE HEIGHT MINUS 6" (FOR BOTTOM ROLLER CLEARANCE)

Gates 20' and over use nylon rollers.

SUPPORT PANEL LENGTH

5' TO 6'

1/2 OF GATE OPENING

HEIGHT	OPENING LENGTH	PRICE
6'0 - 14'	10' - 30'	CALL FOR QUOTE

NOTE: WHEN OPERATOR IS BEING USED IT IS HIGHLY RECOMMENDED TO INSTALL AN OUTRIGGER – INSTALLED IN FIELD GATES MAY BE OPERATED MANUALLY OR WITH A MOTOR

Eastern Chain Link 04/24/23

1.800.339.3362 • www.easternfence.com


CANTILEVER SLIDE GATES






BASIC CANTILEVER GATE LAYOUTS

SLIDE LEFT GATE

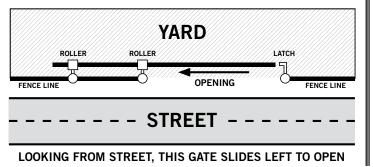

SLIDE RIGHT GATE

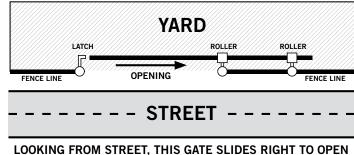


CANTILEVER GATE SAFETY RECOMMENDATIONS

ASTM F1184-93

REQUIRES GUIDE POSTS AND ROLLER GUARDS ON EXTERNAL ROLLER CANTILEVER SLIDE GATES

MUST ORDER WITH EACH ROLLER

CRGUARD



Vertical post placed on both sides of the exposed rollers can prevent hands from reaching these pinch points. Safety edges placed on these posts can be wired to stop the unit upon contact.

Safety Edge

SAFETY EDGES ARE RECOMMENDED

WHEN USED WITH GATE OPERATORS


INTERNAL SLIDE GATES

EXTERNAL SLIDE GATES


ROLLING GATE FRAMES





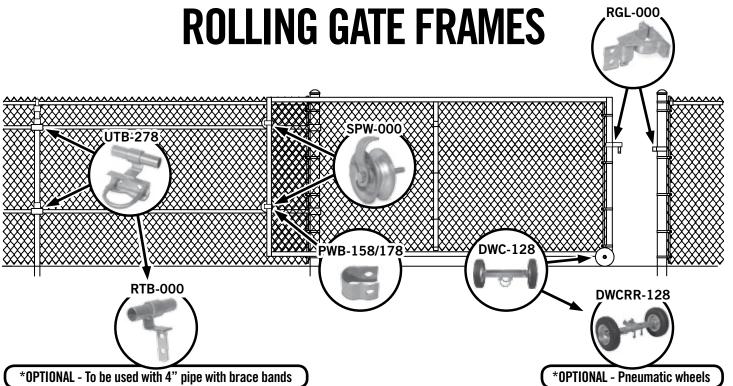

FRAME CONFIGURATION - OPENING SIZES

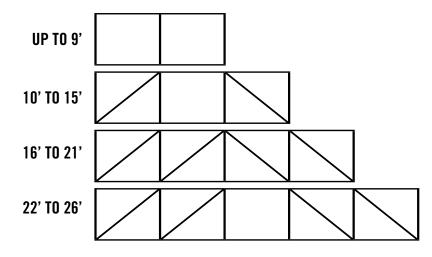

NOTES:

- 1. MADE WITH 1-5/8" SS20 PIPE AND 1-3/8" RES BRACING
- 2. GATES ALSO AVAILABLE IN HEAVIER PIPE.
- 3. GATES AVAILABLE OVER 26' LENGTH
- 4. ROLLING GATE HARDWARE SEE PAGE C14 & C15


GATES PRICES — CALL FOR QUOTE

SPECIALTY FABRICATION







ACCORDION (BI-FOLD) GATES

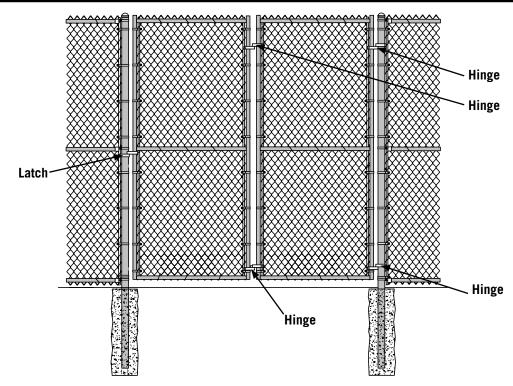

PIPE BENDING

WELDED FLANGES

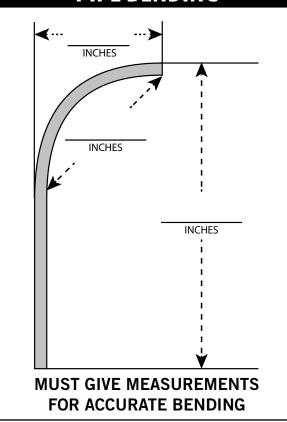

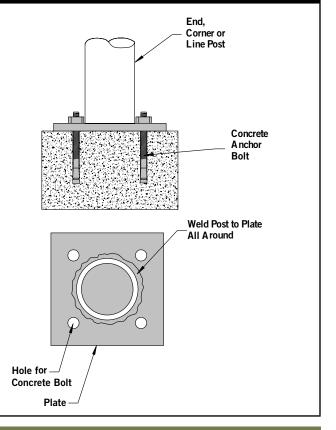

DECORATIVE SLATS and HEDGE



"VPS" DECORATIVE SLATS

"VPS" Decorative Slats are made from high density virgin polyethylene with special ultra-violet inhibitors to insure longer life. Regular Slats are flat and tubular in shape and pre-notched for insertion of horizontal retainer. "VPS" slats carry a full 10 year warranty against fading and breakage. Regular slats have approx. 80% coverage and winged slats approx. 95% coverage.

FOR 2" MESH (Others Available)

"VPS" DECORATIVE SLATS - WINGED									
Item#	Description	Fence Height	Slats/Bag	Feet/Bag	Loose				
BTP3-	VPS Decorative Winged Slat	3′	85	10′					
BTP42-	VPS Decorative Winged Slat	3-1/2"	85	10′					
BTP4-	VPS Decorative Winged Slat	4′	85	10′					
BTP5-	VPS Decorative Winged Slat	5′	85	10′					
BTP6-	VPS Decorative Winged Slat	6'	85	10′					
BTP7-	VPS Decorative Winged Slat	7′	85	10′					
BTP8-	VPS Decorative Winged Slat	8′	85	10′					

"VPS" DECORATIVE SLATS - REGULAR								
Item#	Description	Fence Height	Slats/Bag	Feet/Bag	Loose			
BP3-	VPS Decorative Regular Slat	3′	85	10′				
BP42-	VPS Decorative Regular Slat	3-1/2"	85	10′				
BP4-	VPS Decorative Regular Slat	4′	85	10′				
BP5-	VPS Decorative Regular Slat	5′	85	10′				
BP6-	VPS Decorative Regular Slat	6'	85	10′				
BP7-	VPS Decorative Regular Slat	7′	85	10′				
BP8-	VPS Decorative Regular Slat	8′	85	10′				
BP10-	VPS Decorative Regular Slat	10′	85	10′				
BP12-	VPS Decorative Regular Slat	12'	85	10′				

COLORS AVAILABLE: DESERT SAND (DS), EASTERN GREEN (EG), WHITE (WT), BROWN (BR), BLACK (BK), REDWOOD (RD) AND GRAY (GY)

MANY OTHER COLORS ALSO AVAILABLE.





Eastern Hedge creates a natural hedge look on chain link fence, which requires no maintenance, water, or trimming. Eastern Hedge requires no locking device or tools. It installs much like our classic bottom-locking or top-locking slats.



	"VPS" DECORATIVE SLATS - HEDGE									
Item#	Description	Fence Height	Branches Per Bag	Feet/Bag	Boxes Per Pallet	Each Per Box	Pallet Per Box	4 Pallets Per Box		
EH4	EASTERN HEDGE	4′	82	10′	25					
EH5	EASTERN HEDGE	5′	82	10′	25					
EH6	EASTERN HEDGE	6′	82	10′	25		·			
EH8	EASTERN HEDGE	8′	82	10′	25					
EH10	EASTERN HEDGE	10′	82	10′	25					
EH12	EASTERN HEDGE	12′	82	10′	25					

Eastern Chain Link 04/24/23


1.800.339.3362 • www.easternfence.com




Eastern Wood & Steel Guard Rail

Did you know that Eastern Fence is also one of the largest suppliers of Guard Rail?

Eastern Fence carries a terrific supply of wood and steel guard rail products for your safety needs. **Guard rail** or **guardrail**, sometimes referred to as **guide rail**, is a system designed to keep people or vehicles from (in most cases unintentionally) straying into dangerous or off-limits areas.



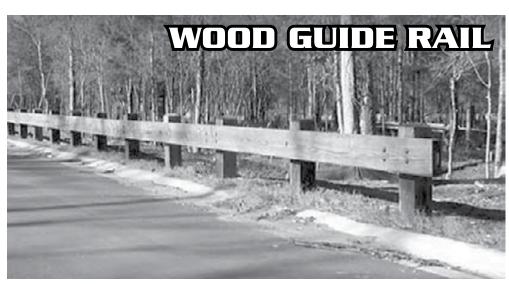










Guardrails are used in a facility setting to protect a company's greatest assets which include their people and expensive equipment.

In traffic engineering, highway guardrail may prevent an errant vehicle from impacting roadside obstacles which may be either man-made (sign structures, culvert inlets, utility poles) or natural (trees, rock croppings), running off the road and going down a steep embankment, or veering off the roadway into oncoming traffic.



"W" Beam Guardrail




"W"-Beam Guardrail Per AASHTO Specification M-180

Class A — 12 gauge (.105 nom.) Class B — 10 gauge (.135 nom.)

n.) Types
n.) Type 2 — Zinc Coated 3.6 oz./sq. ft.
Type 3 — Unfinished Beam (to be painted)
Type 4 — Corrosion Resistant Steel (weathering)
Standard Lengths are 12'6" and 25'0"

(Special lengths available upon request)

Posts and **Blocks**




shapes available)



welded deflection plate

 $(8" \times 24")$



Post on Plate all sizes structural various plate sizes any length



4" × 6" × 8.5# or 9# 13" or 14" Standard any length available


Hook Bolts

Available Hot Dip Galvanized or Corrosion Resistant Steel

Galvanized Hardware

(Some items available in corrosion resistant steel)

Button Head Bolt and Recessed Nut



L = 2" for steel post bolt


L = 4½" for rub rail post bolt L = 10", 16", or 18" For wood or concrete post bolt

Hex Head Bolt and Nut



 $^{5}/_{16}$ dia. \times 1¾" long post bolt $^{1}/_{2}$ dia. \times 1½" long support bolt $^{5}/_{8}$ dia. \times 1½" long block bolt $^{3}/_{4}$ dia. \times 1½" long block bolt $^{3}/_{4}$ dia. \times 18" long anchor bolt $^{7}/_{8}$ dia. \times 18" long anchor bolt

Washers Square



Round




Vrs* thick





Terminal Sections

Galvanized or corrosion resistant steel



- A End Shoe, flat
- B End Shoe, bent lip (for BCT)









Double Buffer

Flared End

Curved Guardrail

Your protection is our business. We help protect life, equipment and property with the application of our guard rail barrier — your "safety belt" on the modern highway. This "profile of protection" is designed to help eliminate injury, death and property damage due to natural hazards along our highways.





Functions of 12'-6" Circular Arc


STATE OF THE PERSON NAMED IN	(0)	(C)	(H)
10	71°-37'	11'-9"	1'-10%"
15	47°-45'	12'-134"	1'- 31/2"
20	35°-49'	12'-35/8"	115/8"
25	28°-39'	12'-41/2"	91/2"
30	23°-52'	12'-47/8"	734"
35	20°-28'	12'-5"	6%"
40	17°-54'	12'-514"	6"
45	15°-55'	12'-51/2"	51/4"
50	14°-19'	12'-55/8"	45/6"
55	13°-01'	12'-5%"	41/4"
60	11°-56'	12'-5%"	4"
65	11°-01'	12'-5%"	35/8"
70	10°-14'	12'-5%"	33/8*
75	9°-33'	12'-5%"	31/4"
80	8°-57'	12'-5¾"	3"
85	8°-26'	12'-57/6"	234"
90	7°-57'	12'-57/6"	25/8"
95	7°-32'	12'-57/8"	21/2"
100	7°-10'	12'-57/8"	23/8"
110	6°-31'	12'-57/e"	21/8"
120	5°-58'	12'-6"	2"
130	5°-31'	12'-6"	134"
140	5°-07	12'-6"	15/8"
150	40-46'	12'-6"	11/2"


GUIDE/BARRIER RAIL - STEEL




GUIDE/BARRIER RAIL - STEEL HIGHWAY RIBBON STYLE - GALVANIZED

Rails, available in either 10 gauge or 12 gauge thickness, are 13' 6" long. Due to rail overlap, the erected section length will be 12'-6". Posts are available 5'-9" long and are pre-punched to accept offset blocks and/or all standard rails.









OUTSIDE CORNER

RAIL

(BOX BEAM AVAILABLE)

Chart for Hardware for Guardrail:

Rail = 8 Short Bolts, 8 Nuts Flairs = 4 Short Bolts, 4 Nuts Single Wraps = 4 Short Bolts, 4 Nuts Double Wraps = 8 Short Bolts, 8 Nuts Posts = 1 Long Bolt, 1 Nut, 1 Washer

GUIDE/BARRIER RAIL - STEEL Description Item# Loose **GR12** 12-Gauge Galvanized Guide Rail **GR10** 10-Gauge Galvanized Guard Rail (Special Order) GRP59 Guard Rail Post, 4"x 6"x 8.5#/Ft. x 5'6" **SWA Guard Rail Single Wrap Around** FLR **Guard Rail Flair End** DWA **Guard Rail Double Wrap Around** (()Guard Rail Corner Connector (Inside) CCOGuard Rail Corner Connector (Outside) BLK13 Guard Rail Offset Block 13" **BUP** Guard Rail Back Up Plate GRL Guard Rail Long Bolt 5/8" x 2" GRS Guard Rail Short Bolt 5/8" x 1-1/4" GRW **Guard Rail Washer** GRN Guard Rail Double Recess Nut 5/8" GRB10 5/8" x 10" Guard Rail Block Bolt

GUIDE/BARRIER RAIL - WOOD




GUIDE/BARRIER RAIL - WOOD

8 x 8 x 5' 4" Southern Yellow Pine

MORTISE or NOTCH Styles .40 CCA Treated For maximum effectiveness all milling is done prior to treatment.


30 YEAR GUARANTEE

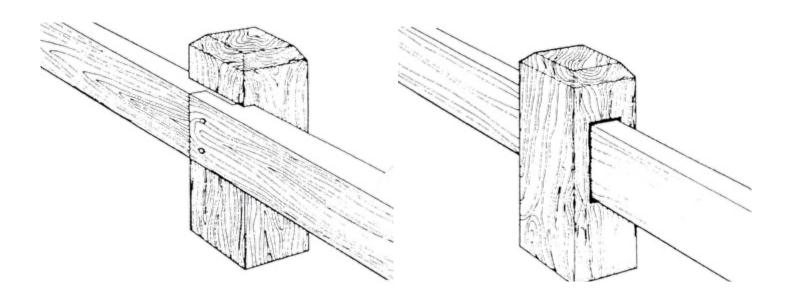

GUIDE/BARRIER RAIL - WOOD				
Item#	Description	Loose		
WGRN	Wood Guide Rail Notched Post			
WGRML	Wood Guide Rail Mortise Line Post			
WGRME	Wood Guide Rail Mortise End Post			
WGRMC	Wood Guide Rail Mortise Corner Post			
WGRR	Wood Guide Rail 4 x 8 x 10 Rail			
WGRLAG	Wood Guide Rail 1/2" x 6" Lag Bolt			

FOR OTHER STYLES **CALL FOR PRICE AND AVAILABILITY**

CHAIN-LINK & SPECIALTY FENCE PRODUCTS

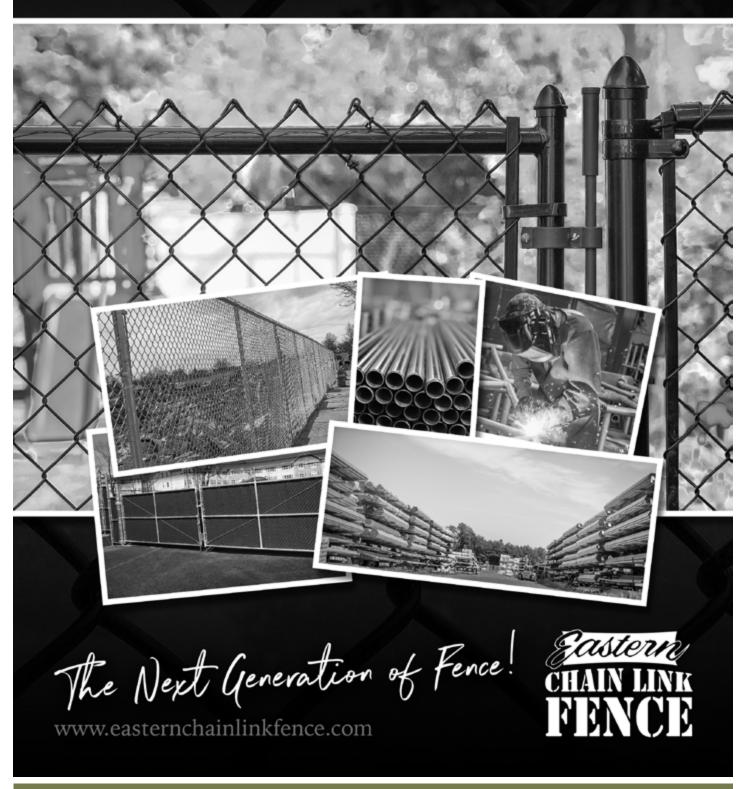



SNOW FENCE

50' PER ROLL - SLAT SIZE 3/8" x 1-1/2" SPACED 2-1/2" APART - 5 STRAND

item #	Description	Height	Eacn	20+ Kolls	
SF48	48" Snow Fence	48"			
SF48-NATURAL	48" Natural Snow Fence	48″			



ORANGE SAF	ETY FENCE

Item #	Mesh Size	Roll Size	Colors	Per Roll	20+ Rolls

SSC-100 3" x 1.5" 4 x 100 ft. ORANGE



FARM AND FIELD FENCE

ltem#	Style	Length (Feet)	Each	20+ Rolls

		Econopies (Cocco)	
FF10470612	1047-06-12½-Gauge 47″Height	330′	7" 7" 7"
FF2096612	2096-6-12½-Gauge 96″Height	330′	8" 6" 6" 6" 6" 5" 5" 5"
FF2096612-BK	2096-6-12½-Gauge 96″Height	330′	6" 5" 5" 4" 3" 3" 3" 3" 3" 3" 3" 3" 3" 3" 3" 3" 3"


3" FF10470612 FF2096612

STUDDED T-POST

50,000 PSI with anchor plate | 5 T-Fasteners are furnished with each

Item # Description	Size	Each	20+ Rolls
--------------------	------	------	-----------

STP72 Studded "T" Post 6′





VINYL COATED WELDED FENCE

2" x 3" MESH • 50 FT. ROLLS

(YARD GUARD)

ltem#	Height	Color	Approx Pounds	Price Per Roll	20+ Rolls	
YG36-	36"	Black (BK) or Eastern Green (EG)	21			
YG48-	48"	Black (BK) or Eastern Green (EG)	27			-

HEAVY DUTY VINYL COATED WELDED FENCE4" x 2" MESH • 50 FT. ROLLS

Item#	Height	Color	Approx Pounds	Price Per Roll	20+ Rolls		
HDYG36-	36"	Black (BK) or Eastern Green (EG)	28				
HDYG48-	48"	Black (BK) or Eastern Green (EG)	37				
HDYG60-	60"	Black (BK) or Eastern Green (EG)	47				
HDYG72-	72″	Black (BK) or Eastern Green (EG)	56				

POOL FENCE

1" x 1" MESH • 50 FT. ROLLS

Item#	Description	1-19 Rolls	20-39 Rolls	40+ Rolls
P00L48-	48" x 1" x 1" x 50' x 16-Gauge Vinyl Welded Mesh			
P00L72-	72" x 1" x 1" x 50' x 16-Gauge Vinyl Welded Mesh		-	


HEAVY DUTY U-POSTS

13 GAUGE • 5 POSTS PER BUNDLE

Item#	Length	Color	Master Bundle Price Each 200 Each	
-------	--------	-------	-----------------------------------	--

72" Black (BK) or Eastern Green (EG) HDP72-

HDP96-96" Black (BK) or Eastern Green (EG)



STA	P	Ę
GALV	AN	7/:

NACT.	MILED
Description	Price Each
1-1/2" x 9-Gauge Staples Case 5 Lbs.	
1-1/2" x 9-Gauge Staples Case 50 Lbs.	
	Description 1-1/2" x 9-Gauge Staples Case 5 Lbs.

Eastern Chain Link 04/24/23

1.800.339.3362 • www.easternfence.com

Page B-78



DEER8 (TENAX C-FLEX)Once installed, DEER8 / DEER8-100 are virtually invisible against your landscaping. The fence are recommended for areas which experience light to moderate deer traffic. Popular with both landscapers and professional installers, DEER8 / DEER8-100 can be used to enclose the perimeter of your property or smaller areas such as gardens.

Item#	Roll Dimensions	Mesh Size	Rolls Per Pallet	Each	20+
DEER8	7.5' High - 330' Per Roll	1.77" x 1.97"	20		
DEER8-100	7.5' High - 100' Per Roll	1.77" x 1.97"	20		

DEER8HD (TENAX C-FLEX P)

The "HD" stands for premium strength. Like DEER8, DEER8HD is virtually invisible once installed and is recommended for areas that experience heavy deer traffic.

Item#	Roll Dimensions	Mesh Size	Rolls Per Pallet	Each	20+
DEER8HD	7.5' High - 164' Roll	1.77" x 1.97"	25		

DEER8XHD (TENAX C-FLEX HEAVY)

DEER8XHD is the heaviest grade product, ideal for professional installers in areas with large deer traffic.

Item#	Roll Dimensions	Mesh Size	Rolls Per Pallet	Each	20+
DEER8XHD	7.5' High - 100' Roll	1.77" x 1.97"	25		




Woven Steel - Hot Dip Galvanized - or Black | Graduated Sizes 6" Wide Spacing - Class 3 6 Lines of 3" - 2 Lines of 4" - 2 Lines of 5" | 3 Lines of 6" - 6 Lines of 7"

Item#	Height	Roll Size	Rolls Per Pallet	Per Roll
FF2096612	7.5' High	330' Per Roll	6	
FF2096612-BK	7.5' High	330' Per Roll	6	

INSTALLATION

- •Tubular 1 3/8" pipe rail steel, pressure treated 2" x 4"s or 4" x 4"s, or metal poles should be used and spaced no more than 15' apart. For optimum results, use 10 foot posts which should be buried 3 feet deep. When trees are in installation path, wrap the netting around the tree and pull the fence tight before securing to supports. For additional support, weave a tension wire along the top and bottom of the fence to secure it to the supports.
- Deer are notorious for trying to push under fence! In order to keep them from getting in, be sure the fence netting touches the ground so that you can anchor it using 12" to 18" metal stakes every 8' - 10', or by attaching a running length of wire end to end, securely fastening it to the bottom of the fence. Additional reinforcement of a metal fence or chicken wire may be added to bottom for protection against rabbits and other animals that tend to chew through the fence.
- You will need to attach 12" long white ribbon onto the fence every 10' at a height of 4'. This will allow the deer to see the newly installed barrier, and keep them from running into it. The ribbon should be left up for six to eight weeks. It is most important to place ribbon along areas of high deer traffic and/or time worn paths (we also recommend using a double layer where frequently traveled paths exist).
- · Corner posts may need additional support by using braces or support wires to hold them steady.

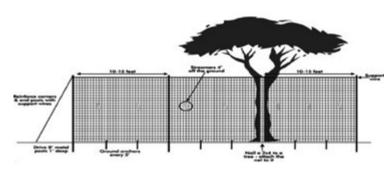

Eastern Chain Link 04/24/23

STEEL HEX WEB DEER FENCE



Black Galvanized Steel, PVC Coated | 35 lb tensile strength per strand 1" Mesh | Virtually Invisible from Approx. 20'

Item# Height Roll Size Roll Weight 1-4 Rolls 5 Rolls or More

DEERHEX-100-BK 7.5' High - 100' Per Roll 7.5'H x 100'L 80 lbs.

INSTALLATION

Steel Hex Web Deer Fence is recommended for those experiencing high deer pressure and want a secure, chew-proof barrier for a garden, residential property, or commercial land. This steel fence can also serve as a fence for dogs that like to chew and dig. Built to last, this fence combines aesthetically pleasing hexagonal openings with a UV-resistant powder-coating to protect the steel wire from harsh weather conditions. Combining this fencing with a monofilament tension line makes a stable, strong barrier against deer and rodents including rabbits, squirrels, and gophers.

What makes Steel Hex Web Fencing THE right choice?

- Chew-Resistant
- 1" openings keep all but the smallest pests away
- 20 30 yr. life span
- Nearly invisible after 20'

Steel Hex Web Deer Fence is simple enough for anyone to install without the help of a professional. This fence is an incredibly lightweight, yet durable alternative to more costly and complicated fence systems. Installation with our no-dig ground sleeve post system and UV treated heavy duty ties is simple enough for anyone. Once installed, this deer fence will require little to no maintenance.

The UV-resistant coating makes this fencing material incredibly durable and will remain tough even after years of harsh weather. The powder coated black color makes this fence virtually invisible from as close as 20 feet.

Roll Size: 7.5' H x 100' L

Gauge: 20

Life Expectancy: 20-30 years

Mesh Dimensions: 1"

Color: Black

Visibility: Virtually Invisible From Approximately 20'

Material: Galvanized Steel, PVC Coated


Weight: 80 lbs.

Per Strand: 35 lb tensile strength per strand

Dog Fencing: Can serve as a fence for dogs that chew


and dig



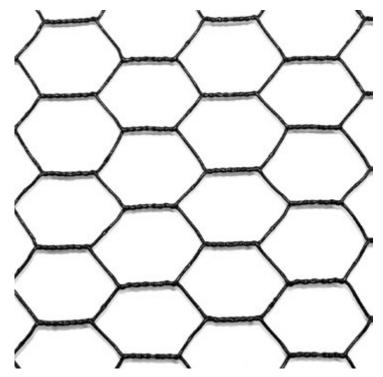

12' x 6' Temp Fence Panels

NOW IN STOCK!

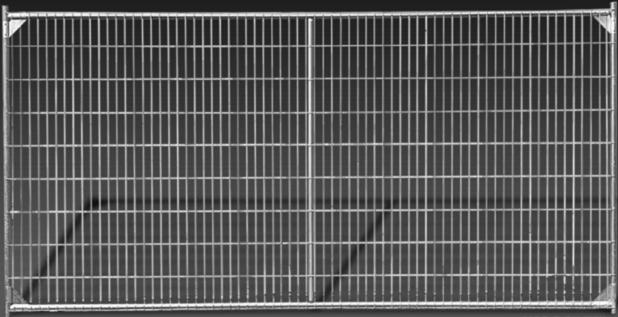

CODE: ETF126WW



- 1/8" Wire Mesh with Clean Lines
- "No-Tangle" Welded Wire Filling
- Gusseted Corners for Long Life
- Ease of Set-Up and Take-Down





Closed stands and saddle clamps are always in stock to complete yourtemporary enclosure needs

The Next Generation of Temp Fence: Basterns
WWW.easternchainlinkfence.com

EASTERN 12:6 TEMP FENCE 0822 | GR2022 EASTERN WHOLESALE FENCE LLC | ALL FIGHTS RESERVED

TEMP FENCE





PANELS

6'H Welded Wire Temporary Fence Panels

Item#	Description	Bundle Count	Loose	Bundle	8-Bundle	Truckload	
ETF126WW	12'W X 6'H Temp. Fence Panel Welded Wire	12					
ETF128WW	12'W X 8'H Temp. Fence Panel Welded Wire	12					

	6'H Temporary Fence Panels									
Item#	Description	Bundle Count	Loose	Bundle	8-Bundle	Truckload				
ETF106	10'W x 6'H Temp. Fence Panel 2-3/8" x 12.5 Ga. Galv. Wire	12								
ETF126	12'W x 6'H Temp. Fence Panel 2-3/8" x 12.5 Ga. Galv. Wire	12								

	8'H Temporary Fence Panels										
Item#	Description	Bundle Count	Loose	Bundle	8-Bundle	Truckload					
ETF108	10'W x 8'H Temp. Fence Panel 2-3/8" x 12.5 Ga. Galv. Wire	12									
ETF128	12'W x 8'H Temp. Fence Panel 2-3/8" x 12.5 Ga. Galv. Wire	12									

ACCESSORIES Eastern Temp Fence Stands Item# Description Bundle Count Loose Bundle

ETFSC Eastern Temp. Fence Stand (Closed) 24



	Saddle Clamps								
Item#		Description	Cast Qty.	Each	Case Each				
SC138	1-3/8" x 1-3/8"		125			00			

Carriage Bolts									
Item#		Description	Case Qty.	Per Box of 100	Case QTY Per 100 Box Ea.				
NR5125	1-3/8" v 1-3/8"		20						

Eastern Chain Link 04/24/23

1.800.339.3362 • www.easternfence.com

Page B-82

PRIVACY SCREENS





EASTERN PRIVACY SCREENS - 90% Green or Black

TYPICAL PROPERTIES - Fabric Material High Density Polyethylene Weave Knitted ravel resistant raschel Color Green Weight oz./sy. 4.0 Width 5'8" & 7'8" Water Flow Rate N/.A. Tape edges 2-3/4" Woven Polyproplene Black Sewing Thread Monofilament Black Polyethylene Grommets #2 Brass spread grommets. The above PROPERTIES are typical averages. Eastern Privacy Screen is made of UV resistant, high density polyethylene. The yarns are a knitted design the helps reduces ripping, tearing, and fraying.

PRIVACY SCREENS


I HITTET SCREENS								
Item#	Description	Case Count	Loose	Case				
EPS906G-BK or EG	Eastern Privacy Screen 90% for 6'H x 100'L with Grommets (18" on ctr.) (Avail. in BK or EG)	12						
EPS908G-BK or EG	Eastern Privacy Screen 90% for 8'H x 100'L with Grommets (18" on ctr.) (Avail. in BK or EG)	12			422			

	GROMMET TIES			
Item#	Description	Bndl. Count	Loose	Bundle
EPSGTT	Eastern Privacy Screen Grommet Tie Top (100 ties per bag. 1 bag needed per 100' roll)	24		
FPNIAIR	Eastern Privacy Screen Grommet Tie Bottom (100 ties per bag. 1 bag needed per 100' roll)	24		

EASTERN PRIVACY SCREEN

RECOMMENDED FOR USE WITH EASTERN TEMP FENCE


Eastern Privacy Screen is an economical, tape knit that is UV stabilized. Due to it's unique design, it can be installed with or without tape and grommets. It also has a low shrinkage factor and high dimensional stability.



EPS - WOVEN

DESIGNED TO BLOCK SIGHT, WIND, AND STAND UP TO THE ELEMENTS.


Our screens have superior UV resistance for extended life-span and are some of the most rugged outdoor fabrics in the world.



EPS - LATH SHADE

WELL SUITED FOR WINDY APPLICATIONS SUCH AS PRIVACY FENCING OR TENNIS WINDSCREEN.


Eastern Privacy Screen Lath Shade is high UV stabilized, strong, long-lasting, and resistant to abrasion. The airflow openings help to reduce stress on structures.



EPS - KNIT WIND SCREEN - (HDPE)

RECOMMENDED FOR USE WITH SPORTS FACILITIES

Great for tennis courts, baseball fields other sports applications. They are made of UV resistant, high density polyethylene. The yarns give the fabric strength and flexibility, and the knitted design ensures against ripping, tearing, and fraying.



EPS - SOLID PRIVACY VINYL

GREAT FOR SENSITIVE WORK AREAS, HIGH SECURITY INSTALLATIONS.


Coated on both sides and gives a 100% visual block. Fire resistant screens also available.



EPS - KNOTTED NET

FOR USE WITH GOLF COURSES, DRIVING RANGES, BATTING CAGES, AND MORE.

Available with many different opening sizes and yarn thickness for different sports and levels of play. Most nets can be bordered with rope or tape and grommets for easy installation.





1.800.339.3362 • www.easternfence.com

Page B-83

"Just Built Better..."





Phone: 800.339.3362 | www.EasternChainlinkFence.com

©Eastern Wholesale Fence LLC • All Rights Reserved